



GENTECH INTERNATIONAL LTD

LIQUID LEVEL SENSOR

LS Series - Horizontal Level Sensor

LS303-51N

Grangestone Industrial Estate Girvan, Ayrshire KA26 9PS United Kingdom

Telephone: +44 1465 713581 Fax: +44 1465 714974

E-Mail: info@gentechsensors.com Web Site www.gentechsensors.com

Design Features

- High or low level sensing
- Universal (internal and external)
- Reed Switch reliability
- Nitrile sealing components
- Easy installation

Product Comments

- UL listed model, File E98428
- Normally open or normally closed by rotating through 180°
- Suitable for a wide range of liquids
- Interface option available
- Nylon 6.6 Material

Typical Applications

- Chemical high or low level
- Cooking Oil
- Fuel low level
- Alcohols
- Slump Level




Material, Design and Operation	
Mounting:	Side Entry
Material:	Nylon 6.6
Fitting	Universal (internal and external)
Contact Form:	Form A - SPST
Contact Material:	Ruthenium
Maximum Switching Volts:	250VAC
Maximum Switching Current:	1.0
Maximum Power:	15 Watts
Housing Temperature Range °C:	110
Housing Material:	Glass Filled Nylon 6.6
Housing Colour:	Blue
Float Material:	Glass Filled Nylon 6.6
Connection Type:	Stripped Cables
Cable Type:	2 x 18AWG 32/0.2mm PVC insulated 0.5m long to UL/CSA/BS6361
Cable Colour:	Black/Black
Minimum Specific Gravity:	0.85
Operating Temperature Range °C:	110
Medium/Liquid	Fuels & Oils
Mounting Shock:	50g for 11ms duration
Operating Pressure Bar:	4
Mounting Vibration:	35g up to 500Hz
Operate Mode:	N/C with float horizontal







Line Drawing


Internal Fitting






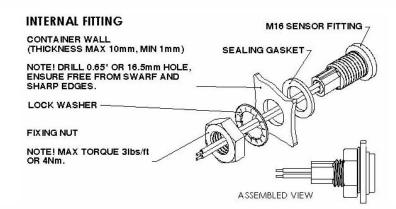

External Fitting





EXTERNAL FITTING

