

BSTS/BSTS-FR General Purpose Heat-Shrinkable Tubing

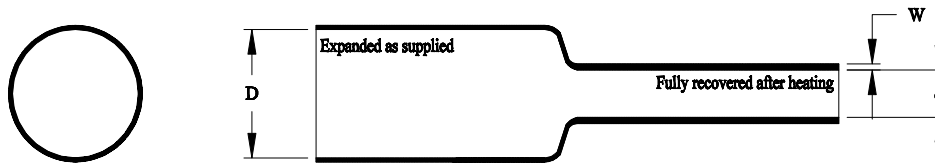


Table 1: Dimensions

SIZE	As Supplied	Recovered	
	Inside Diameter Minimum (D)	Inside Diameter Maximum (d)	Wall Thickness Nominal (W)
-03	0.300 (8)	0.100 (3)	0.070 (1.8)
-04	0.400 (10)	0.150 (4)	0.070 (1.8)
-07M	0.750 (19)	0.220 (6)	0.070 (1.8)
-07	0.750 (19)	0.220 (6)	0.100 (2.5)
-11M	1.100 (28)	0.375 (10)	0.110 (2.8)
-11	1.100 (28)	0.375 (10)	0.120 (3.0)
-13M	1.300 (33)	0.375 (10)	0.110 (2.8)
-13	1.300 (33)	0.375 (10)	0.120 (3.0)
-15M	1.500 (38)	0.500 (13)	0.120 (3.0)
-15	1.500 (38)	0.500 (13)	0.140 (3.6)
-17M	1.700 (43)	0.500 (13)	0.120 (3.0)
-17	1.700 (43)	0.500 (13)	0.140 (3.6)
-20M	2.000 (51)	0.750 (19)	0.120 (3.0)
-20	2.000 (51)	0.750 (19)	0.160 (4.1)
-27	2.700 (69)	0.900 (23)	0.160 (4.1)
-30	3.000 (76)	1.250 (32)	0.160 (4.1)
-35	3.500 (89)	1.250 (32)	0.160 (4.1)
-40	4.000 (102)	1.750 (44)	0.160 (4.1)
-45	4.500 (114)	1.750 (44)	0.160 (4.1)

Properties: **BSTS** tubing is fabricated from thermally stabilized, crosslinked, modified polyolefin. It is not flame retarded. It shall be black unless otherwise specified. **BSTS** tubing meets the material requirements of RW 2017.

© 2006 Tyco Electronics Corporation. All rights reserved


Specification Control Drawing

	Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA 94025 USA		Title: General Purpose Heat-shrinkable Tubing		
	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application		Document No : BSTS/BSTS-FR		
Cage Code: 06090	Scale: None	Size: A	Rev. Date: 30-Jun-06	Rev.: C	Sheet: 1 of 2

If this document is printed it becomes uncontrolled. Check for the latest revision.

BSTS-FR tubing is fabricated from thermally stabilized, flame retarded, cross linked, modified polyolefin. It shall be black unless otherwise specified. BSTS-FR tubing meets the material requirements of RW 2017.

ORDERING INFORMATION (*)

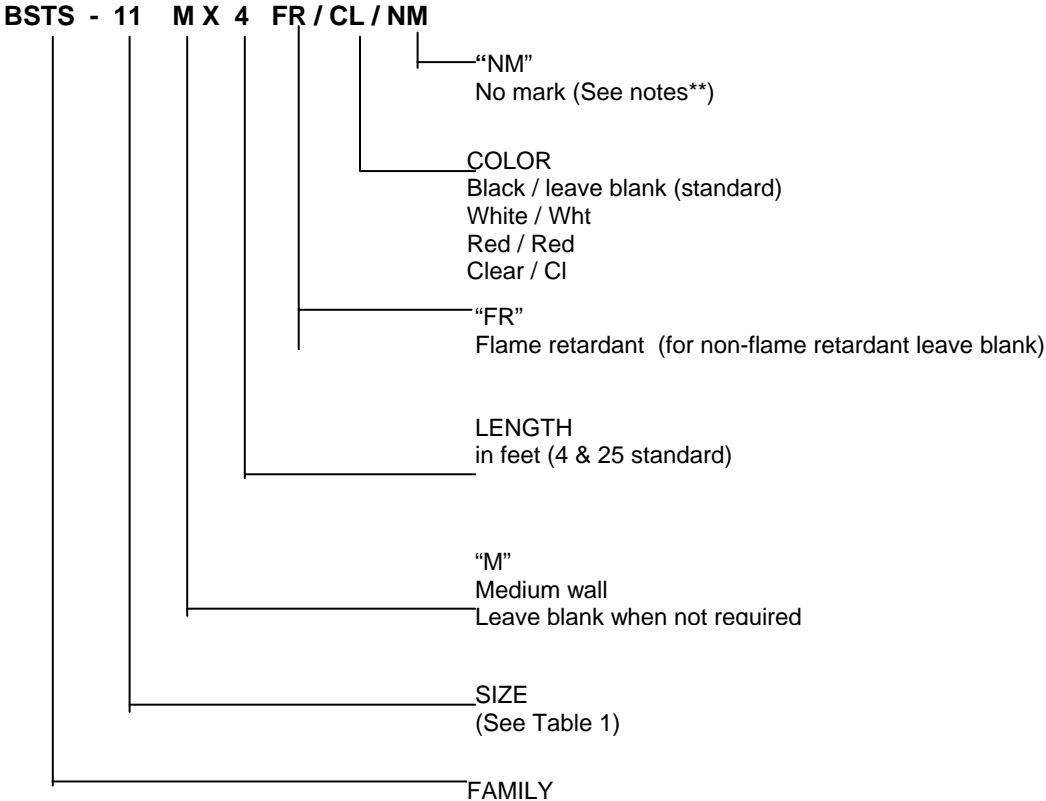

Notes:

- * Order SST if sealant / adhesive is required
 - ** Standard marking is white for black and red tubing. Standard marking is black for white and clear tubing.
- Expanded and recovered dimensions will be printed in inches and millimeters. FR will be printed on flame retardant product.

Rev. Date: 30-Jun-06	Rev.: C	Document No. BSTS/BSTS-FR	Sheet: 2 of 2
-------------------------	------------	-------------------------------------	------------------

© 2006 Tyco Electronics Corporation. All rights reserved
 If this document is printed it becomes uncontrolled. Check for the latest revision.