


## TECH SPEC

### PRE-MADE VIDEO CABLES


110-178 to 110-180  
 110-181 to 110-185  
 110-024 to 110-027

Date: 31/03/2003  
 Page: 1 of 2

All dimensions are in millimeters (mm) unless otherwise noted.  
 Dimensions are **TYPICAL** and are for general reference purposes only.

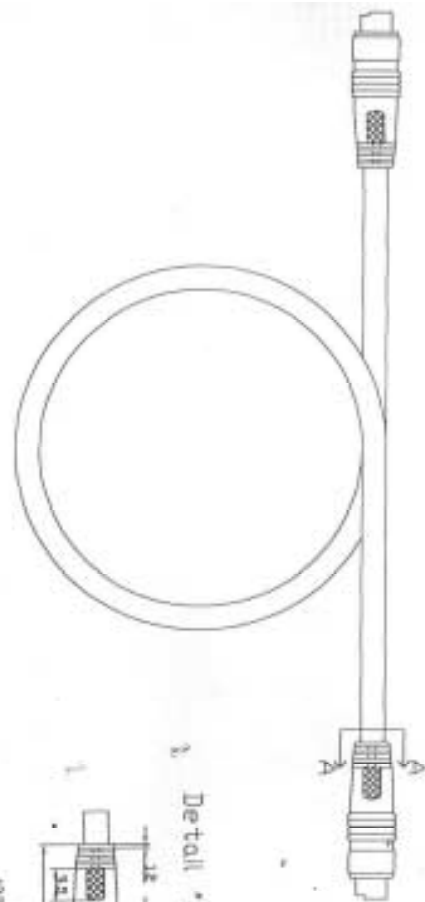

Detail 'A' Plug

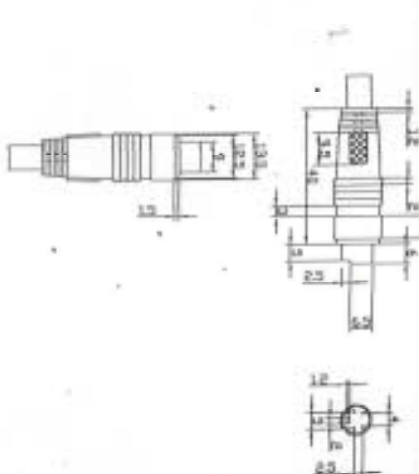

**PART NUMBERS:**

- 110-178 0.5M 4 POLE SVHS CABLE
- 110-024 1M 4 POLE SVHS CABLE
- 110-025 3M 4 POLE SVHS CABLE
- 110-026 5M 4 POLE SVHS CABLE
- 110-027 10M 4 POLE SVHS CABLE
- 110-179 15M 4 POLE SVHS CABLE
- 110-180 20M 4 POLE SVHS CABLE

# TECH SPEC



PROF LABIE TECHNOLOGY

## PRE-MADE VIDEO CABLES

110-178 to 110-180  
110-181 to 110-185  
110-024 to 110-027

Date: 31/03/2003  
Page: 2 of 2

### TECHNICAL SPECIFICATION

**PART NUMBERS:** 110-178 0.5M 4 POLE SVHS CABLE  
110-024 1M 4 POLE SVHS CABLE  
110-025 3M 4 POLE SVHS CABLE  
110-026 5M 4 POLE SVHS CABLE  
110-027 10M 4 POLE SVHS CABLE  
110-179 15M 4 POLE SVHS CABLE  
110-180 20M 4 POLE SVHS CABLE

LOW-LOSS TWIN 75ohm OFC COAXIAL CABLE.  
4 POLE GOLD PLATED S VIDEO CONNECTOR PLUG to PLUG

### SPECIFICATION

OFC OFC  
[(16/0.10mm x1C+80/0.10mm)x2C]x1C

### CONSTRUCTION

		FIRST SHIELD	MATERIAL: DIAMETER:	OFC Braid	
CONDUCTOR	Material: Size: Stranding: Diameter:	INNER JACKET	Material: Diameter:	PVC 2.8mm	
INSULATION	Material: Diameter:	SECOND SHIELD	Material: Diameter:		
JACKET	Material: Diameter:	COLOUR: MAROON			

