


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS				DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398						
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE		
1429	Α	Released	JWM	6/14/04	но	6/14/04	JC	6/14/04		

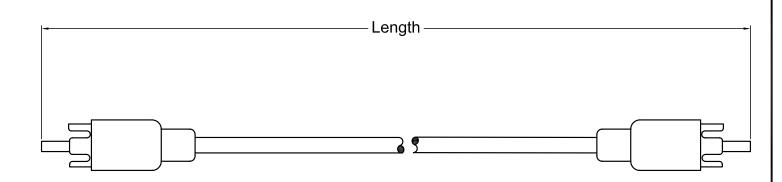

NOTES:

- Shielded Cable (0.12mm/10)

- Gauge: 26 AWG - Jacket: PVC, Gray

- Sprial Shield: 30/0.10 Bare Copper

- Dielectric Strength: AC/DC 300V/1 Minute

SPC Type No.	Length
SPC12024	1-1/2 Ft
SPC12025	3 Ft.
SPC12026	6 Ft.
SPC12027	12 Ft.

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDED USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

TOLERANCES:

DRAWN BY:	DATE:		ING TITLE:						
Jeff McVicker	6/14/04		Audio Extensio	on Cables,	RCA	Plug	to RC	A F	Plug
CHECKED BY:	DATE:	SIZE	DWG. NO.			ELEC	FRONIC F	ILE	
Hisham Odish 6/14/04			TA-618		TA-618.dwg				
APPROVED BY:	DATE:			1					-
John Cole 6/14/04		SCALE: NTS		U.O.M.: INCHES [mm]]	SHEET:	1	OF

Α

1 OF 1