




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART, CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1429	A	RELEASED	JWM	1/19/04	HO	12/19/03	JC	1/15/04

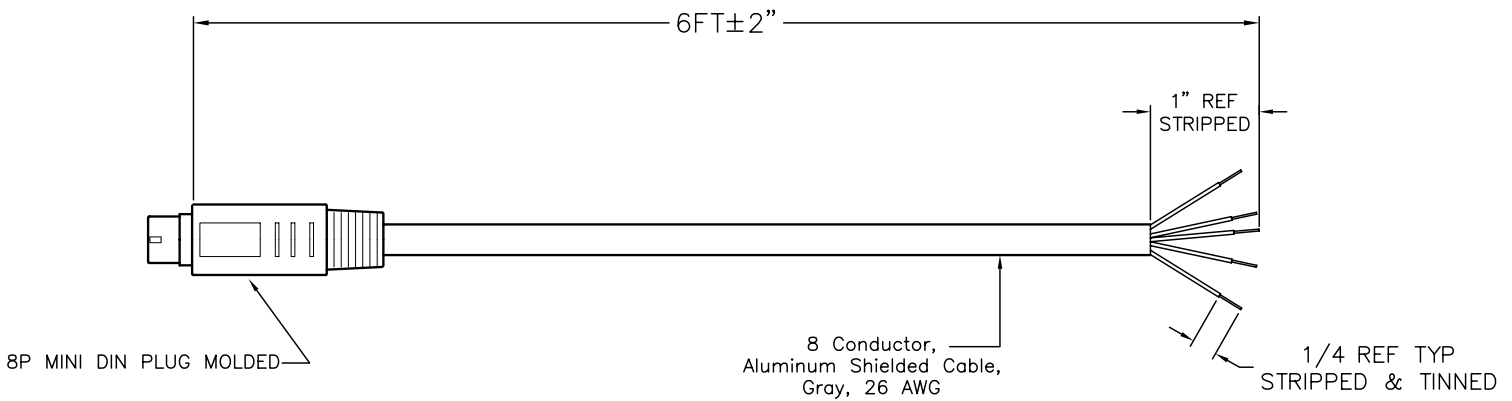


ELECTRICAL SPECIFICATION

- RATED CURRENT: 2.5A, 300VDC
- INSULATION RESISTANCE: 100 MEGOHMS AT 500VDC
- DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC MIN.
- CONTACT RESISTANCE: 10 OHMS MAX. AT 2.5VDC AT 1A

MOLDED MATERIAL: PVC, 50P, UL94V-0, GRAY

PIN OUTS (Front View)

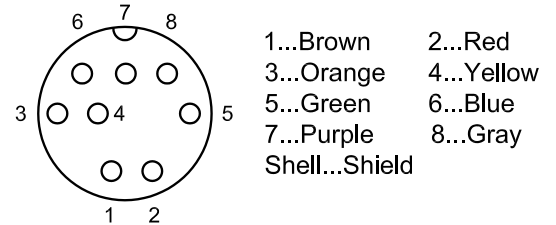

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	1/19/04
CHECKED BY:	DATE:
Hisham Odish	12/19/04
APPROVED BY:	DATE:
John Cole	1/15/04

DRAWING TITLE:			
Mini-Din Cable Assembly			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC12043	95C0311.dwg	A
SCALE: NTS		U.O.M.: INCHES [mm]	SHEET: 1 OF 1