



MOLD	INSIDE NO.	OUTSIDE NO.
DVI 29P M	020580	YD-199
DVI 29P F	YD-198	YD-198

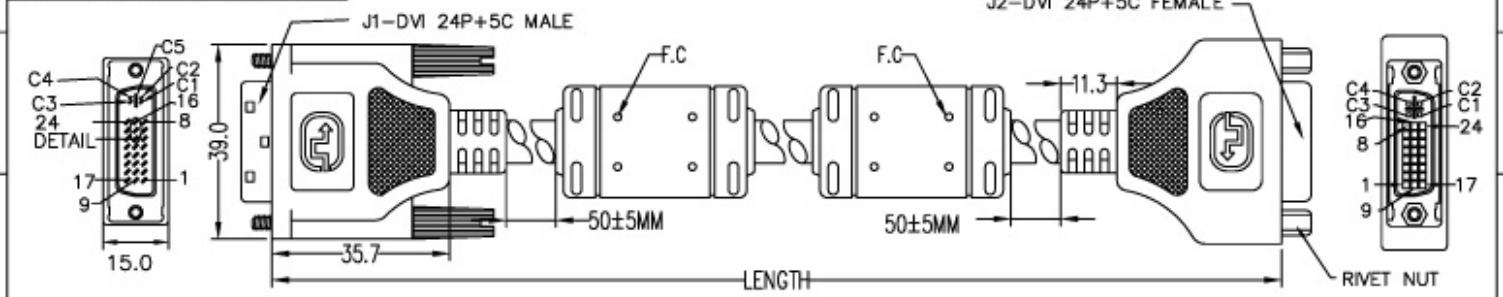


注解

- 線 UL20276(30# 3C COAX)+(28#\*1P+EAM)\*4+28AWG\*1P+28AWG\*6C AEB  
OD=8.5MM 外被顏色 米色3#
- 連接器 J1-DVI 24+5C MALE SOLDER MD TYPE W/TS  
J2-DVI 24+5C FEMALE(RIVET NUT) MD TYPE  
J1,J2-(PIN針鍍金) 內部加箔隔離  
W/ "RoHS" LOGO ON THE PIN1~8 SIDE
- 螺絲 4\*33.0MM(#4-40 UNC) 顏色:米色3#
- 膠芯顏色:黑色 外模成型PVC顏色:米色3#
- 鐵粉芯(BRH15.5\*28.5\*10.5)
- 包裝 W/空白袋(右下角印"MADE IN CHINA")

G.W. NO.	LENGTH
HCD16720000000	2M±0.05M

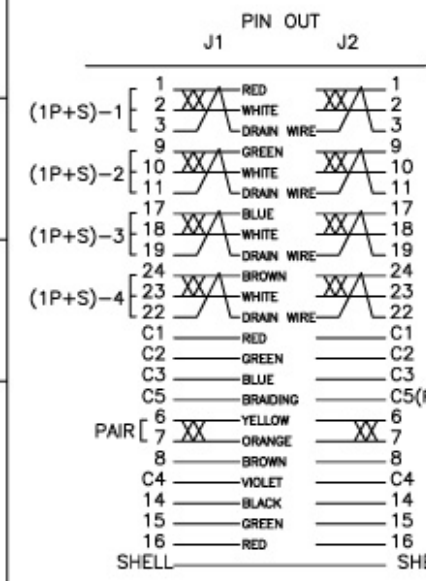

本圖繪之產品符合RoHs  
環境管理物質的要求

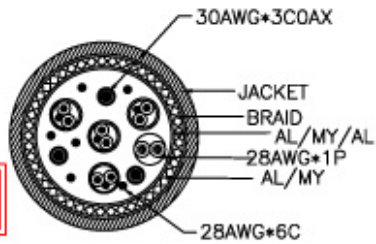

SCALE: 4:1

1-0	AUG-16-2006	2214-060800006	
REV	DESCRIPTION	DATE	EON NO.
DWG NAME: DVI 24+5C M/F CABLE			
G. W. NO:	SEE THE TABLE	CUS. ID:	
CUS. NO:		DWG. NO:	DVI-126
SHEET: 1/1	TOLERANCE: . X _____ . XX _____	UNIT: mm	
	SCALE: 1:1	DRAW. BY:	
		CHECKED:	
		APPROVE:	