


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS				DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
1429	Α	Released	JWM	5/19/04	но	6/14/04	JC	6/14/04	

Α

1 OF 1

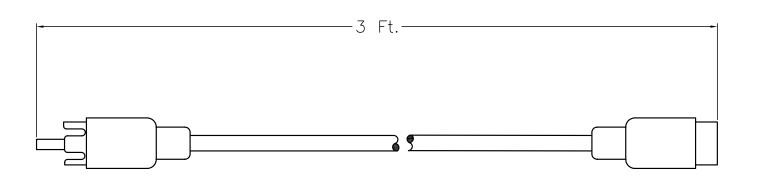

NOTES:

- Shielded Cable (0.12mm/10)

- Gauge: 26 AWG - Jacket: PVC, Gray

- Sprial Shield: 30/0.10 Bare Copper

- Dielectric Strength: AC/DC 300V/1 Minute

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND
FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.
LIABILITY WHATSUEVER IN CONNECTION THEREWITH.

TOLERANCES:	DRAWN BY:	DATE:		ING TITLE:				
UNLESS OTHERWISE	Jeff McVicker	5/19/04		Audio Extensio	n Cables, RCA	Jack	to RCA F	الا
SPECIFIED,	CHECKED BY:	DATE:	SIZE	DWG. NO.		ELEC	TRONIC FILE	
DIMENSIONS ARE	Hisham Odish	6/14/04	Α	SPC	12028	9:	5C0296.dw	/g
PURPOSES ONLY.	APPROVED BY:	DATE:			_			
	JohnCole	6/14/04	SCALE: NTS		U.O.M.: INCHES [mm]		SHEET: 1 OF	