


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/11/10	D.GRIFFIN
B	ECN 5123: ADDED DESCRIPTIONS, CHANGED "J1" TO "P2" IN WIRE MAP	11/4/10	D.FRISIELLO

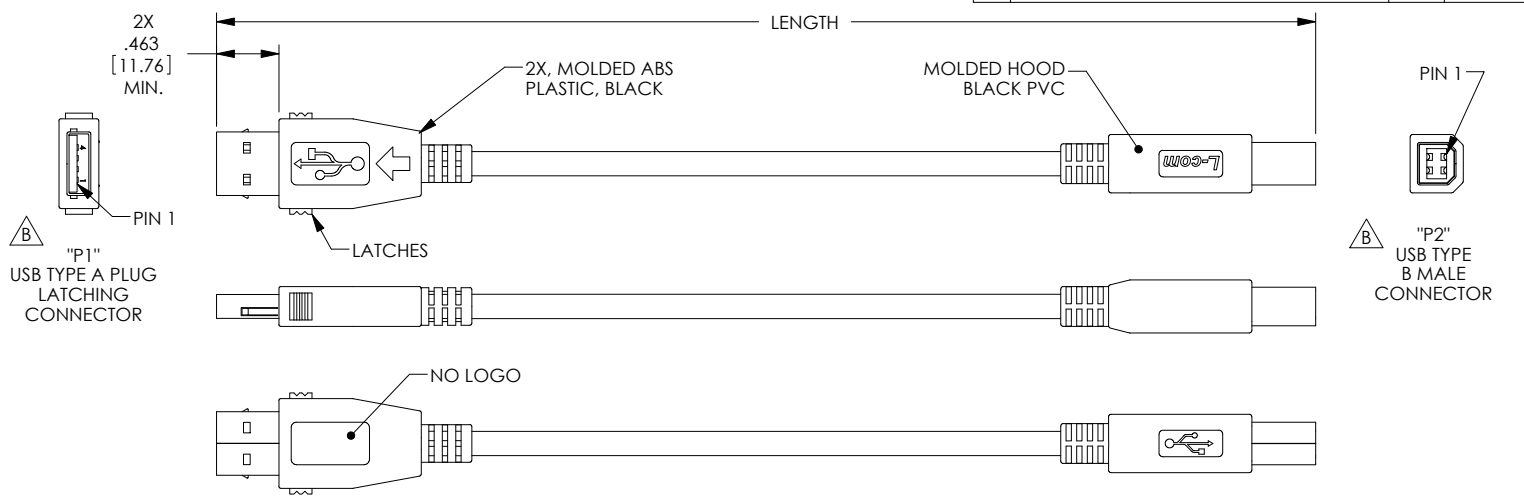


NOTES:

MATERIALS:
 CONNECTOR SHELL: STEEL OR COPPER ALLOY
 INSULATOR: THERMOPLASTIC, UL94V-0
 CONTACTS: COPPER ALLOY

FINISH:
 SHELL: NICKEL PLATE
 CONTACTS: 30µ IN MIN. GOLD PLATE, OVER NICKEL PLATE.

CABLE CHARACTERISTICS:
 UL TYPE CM, 1X TWISTED PAIR, 28AWG STRANDED TINNED COPPER, POLYETHYLENE INSULATION, 2 COND 24 AWG STRANDED TINNED COPPER, PVC INSULATION, OVERALL ALUMINUM/POLYESTER FOIL SHIELD, 100% COVERAGE, 25%OVERLAP WITH STRANDED TINNED COPPER DRAIN WIRE PLUS TINNED COPPER BRAID SHIELD. JACKET: PVC, BLACK

MISCELLANEOUS:
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
 CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 CONNECT DRAIN WIRE TO CONNECTOR SHELL.
 CABLE ASSEMBLY MUST MEET REQUIREMENTS OF USB 2.0.

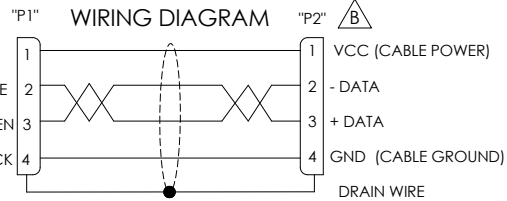

PART NO.	LENGTH METERS, [FT]
CAUALB-05M	0.5 [1.64]
CAUALB-1M	1.0 [3.28]
CAUALB-2M	2.0 [6.56]
CAUALB-3M	3.0 [9.84]
CAUALB-4M	4.0 [13.12]
CAUALB-5M	5.0 [16.40]

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +5% / -0%	DRAWN BY D.FRISIELLO	10/23/09		
ALL OTHER DIMENSIONAL TOLERANCES: $X = \pm .2$ $XX = \pm .02$ $XXX = \pm .005$	CHECKED BY M.MARTINEZ	10/23/09	PRODUCT DESCRIPTION CA, USB TYPE A-M LATCH/TYPE B-M	
PROJECTION	APPROVED BY S.SMITH	10/23/09		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR
SCALE: NONE CAD FILE: CAUALB.SLDRW SHEET 1 OF 1				