


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	11/5/01	T CLARK

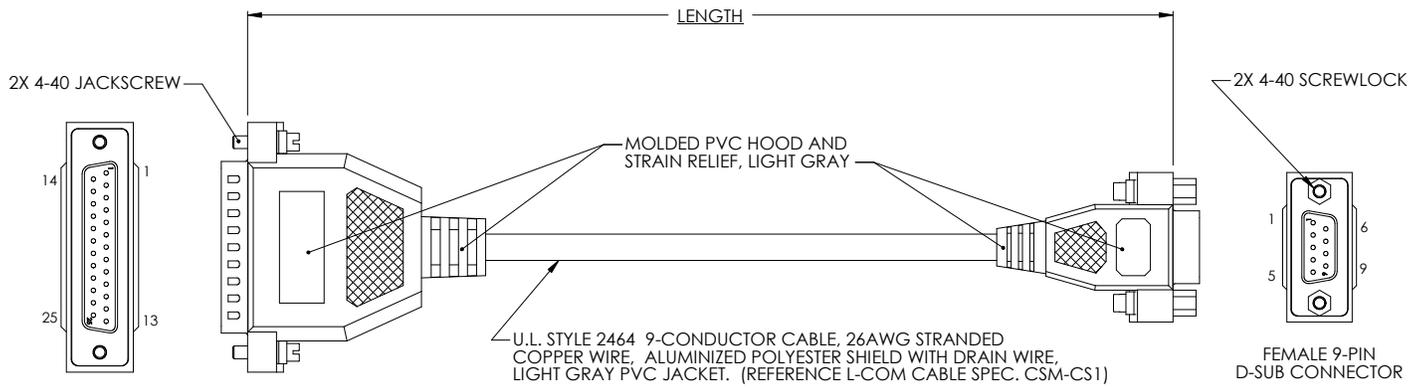


MALE 25-PIN D-SUB CONNECTOR

FEMALE 9-PIN D-SUB CONNECTOR

U.L. STYLE 2464 9-CONDUCTOR CABLE, 26AWG STRANDED COPPER WIRE, ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE, LIGHT GRAY PVC JACKET. (REFERENCE L-COM CABLE SPEC. CSM-CS1)

WIRE CHART	
DB25M	DB9F
PIN 8	PIN 1
PIN 3	PIN 2
PIN 2	PIN 3
PIN 20	PIN 4
PIN 7	PIN 5
PIN 6	PIN 6
PIN 4	PIN 7
PIN 5	PIN 8
PIN 22	PIN 9
SHELL	SHELL

MODEL NUMBER	LENGTH	
	INCHES)	(MM)
CMZ6-IBM	72.0	1829
CMZ10-IBM	120.0	3048

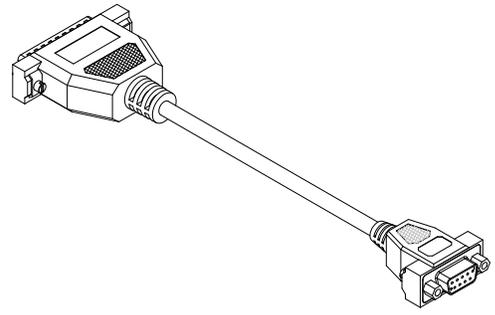

- NOTES:
- INTERNAL 360° FOIL SHIELDS IN CONNECTOR HOODS ARE CONNECTED TO THE CABLE DRAIN WIRE AND CONNECTOR FRAMES.
  - CONNECTOR PINS ARE GOLD PLATED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES  
 TOLERANCES ARE:  
 .XX ±.01  
 .XXX ±.005  
 CABLE LENGTH TOLERANCE  
 <300' ±5% >300' ±2%

APPROVALS	DATE
DRAWN BY T CLARK	11/2/2001
CHECKED BY D PARHAM	11/2/2001
APPROVED BY C MCCORMICK	11/5/2001

**L-com**  
CONNECTIVITY PRODUCTS

45 BEECHWOOD DRIVE  
NORTH ANDOVER, MA  
01845

PRODUCT DESCRIPTION  
**AT MODEM CABLE ASSEMBLY**

DRAWING TITLE  
**OUTLINE DRAWING**

SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>CMZ6-IBM-OD1</b>	REV. <b>A</b>
SCALE: NONE		CAD FILE: CMZ6-IBM-OD1.SLDDRW	SHEET 1 OF 1

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY