





ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 • Effective: 7/8/02 • DCP No: 1398

| DCP # | REV | DESCRIPTION | DRAWN | DATE | CHECKD | DATE | APPRVD | DATE |
|-------|-----|-------------|-------|----------|--------|----------|--------|----------|
| 1906 | A | RELEASED | EO | 04/17/06 | TL | 05/25/06 | HO | 05/25/06 |

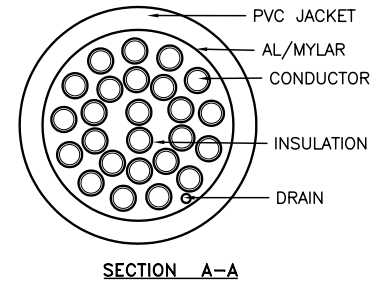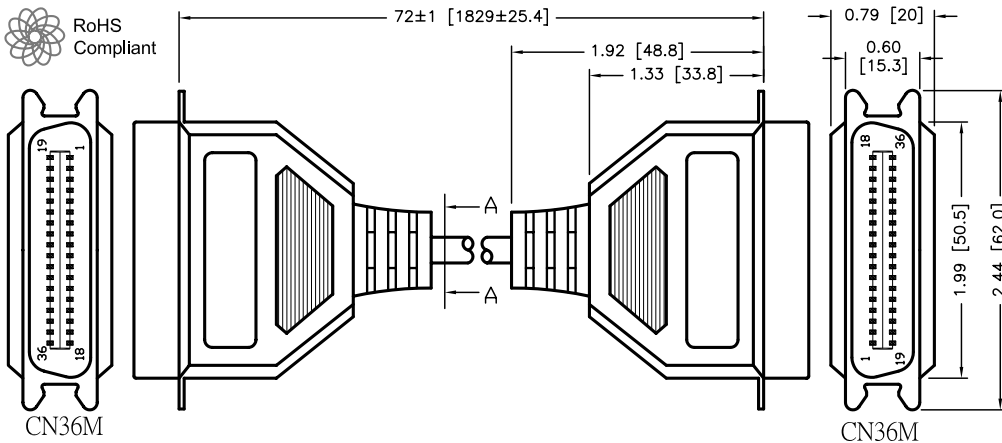

Specifications:

- Molded connector end requirements:
 - A) Inner mold using PE
 - B) Aluminum foil wrap to connector
 - C) PVC - 45P, Platinum gray
- Cable:
 - [28AWG (7/0.12)*25C+AL/MY+DW(7/0.16)]TIN
 - Insulation: PP, OD=ø0.78±0.03MM
 - Color: COLOR CODE
 - Jacket: PVC, OD = ø7.0±0.15mm
 - Color: Platinum gray
- Connectors: CN36P Male Nickel plating, Insulator Color: Blue

| SPC TYPE No. | LENGTH |
|--------------|-------------------|
| SPC19923 | 72±1 [1829±25.4] |
| SPC19922 | 120±2 [3048±50.8] |

| PIN OUTS | | | | | | | | |
|----------|------------|----------|----------|--------------|----------|----------|--------------|----------|
| C36 MALE | WIRE COLOR | C36 MALE | C36 MALE | WIRE COLOR | C36 MALE | C36 MALE | WIRE COLOR | C36 MALE |
| 1 | BLACK | 1 | 10 | GRAY | 10 | 22 | LIGHT-GREEN | 22 |
| 2 | BROWN | 2 | 11 | BLACK/WHITE | 11 | 23 | PINK | 23 |
| 3 | RED | 3 | 12 | BROWN/WHITE | 12 | 24 | PINK/BLACK | 24 |
| 4 | ORANGE | 4 | 13 | RED./WHITE | 13 | 25 | GRAY/BLACK | 25 |
| 5 | YELLOW | 5 | 14 | ORANGE/WHITE | 14 | 31 | ORANGE/BLACK | 31 |
| 6 | GREEN | 6 | 16 | YELLOW/BLACK | 16 | 32 | RED/BLACK | 32 |
| 7 | BLUE | 7 | 19 | GREEN/WHITE | 19 | 36 | GREEN/BLACK | 36 |
| 8 | PURPLE | 8 | 20 | BLUE/WHITE | 20 | Shell | | Shell |
| 9 | WHITE | 9 | 21 | PURPLE/WHITE | 21 | | | |

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE THE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

| | |
|--------------|----------|
| DRAWN BY: | DATE: |
| EKLAS ODISH | 04/17/06 |
| CHECKED BY: | DATE: |
| THOMAS LEE | 05/25/06 |
| APPROVED BY: | DATE: |
| HISHAM ODISH | 05/25/06 |

| | | | |
|--|----------|---------------------|---------------|
| DRAWING TITLE: | | | |
| Centronics Data Cable, Centronics 36 Pin M/M | | | |
| SIZE | DWG. NO. | ELECTRONIC FILE | REV |
| A | TA-744 | TA-744.DWG | A |
| SCALE: NTS | | U.O.M.: INCHES [mm] | SHEET: 1 OF 1 |