

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		D1		REVISED PER ECO-11-005033	22MAR11	RK	HMR

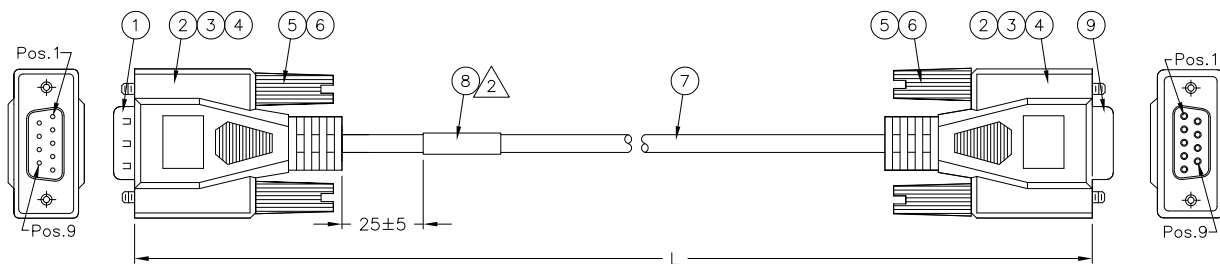

PIN ASSIGNMENT :

DB9 F.	1	2	3	4	5	6	7	8	9	Shell
										Drain
DB9 M.	1	2	3	4	5	6	7	8	9	Shell

621808-2	120.0 <sup>+5.00</sup> / <sub>-2.00</sub>	10	2 OHM MAX
621808-1	72.0 <sup>+6.00</sup> / <sub>-2.00</sub>	6	1 OHM MAX
PART NO.	"L" LENGTH	LABEL XX'	CONTINUITY RESISTANCE

NOTES:

- PACKAGED IN CTG STANDARD PRINTED ZIPLOCK POLYBAG.
- LABEL INFORMATION AS FOLLOWS:  

621808-XX
1938943000A
- TEST REQUIREMENT:  
 CONTINUITY RESISTANCE: SEE TABLE.  
 INSULATION RESISTANCE: 50 M ohm MIN.  
 HI-POT TEST: DC 300V/0.01 Sec MIN.  
 PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY ENVIRONMENTAL STANDARD 230-702.

1	PC	DB9 FEMALE, SOLDER TYPE, CONTACT: GOLD FLASH, SHELL: NICKEL PLATED, INSULATION COLOR: BLACK. RoHS.	9
1	PC	LABEL, SIZE: 25.0*35.0MM, WHITE: 25.0*13.0MM.	8
AR	MR	UL2464 9C*28AWG+AL/FOIL+DRAIN, COLOR: BEIGE.	7
2	PC	#4-40 THUMBSCREW.	6
AR	KG	MOLDED PVC, 30P, COLOR: BEIGE.(BG01).	5
AR	MR	HEAT SHRINK TUBING, 1.5MM, COLOR: BLACK.	4
AR	KG	OVER MOLD PVC, 40P, COLOR: BEIGE.(BG01).	3
AR	KG	INNER MOLD PE	2
1	PC	DB9 MALE, SOLDER TYPE, CONTACT: GOLD FLASH, SHELL: NICKEL PLATED, INSULATION COLOR: BLACK. RoHS.	1
QTY	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	11-19-96		
		CHK	BJUNDE		
		APVD	BJUNDE		
		NAME			
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	SINGOL HE		CABLE ASSY, DB9 FEMALE TO MALE, OVERMOLDED	
INCHES	0 PLC ± -	PRODUCT SPEC		-	
	1 PLC ± -	APPLICATION SPEC		-	
	2 PLC ± -	WEIGHT		-	
	3 PLC ± -	SIZE		A3	
	4 PLC ± -	CAGE CODE		00779	
	ANGLES ± -	DRAWING NO		C-621808	
MATERIAL	FINISH	RESTRICTED TO		-	
-	-	CUSTOMER DRAWING		SCALE 1:1 SHEET 1 of 1 REV D1	