


TABLE

ITEM NO	L
4070	2000mm±30mm
4070-3	3000mm±30MM

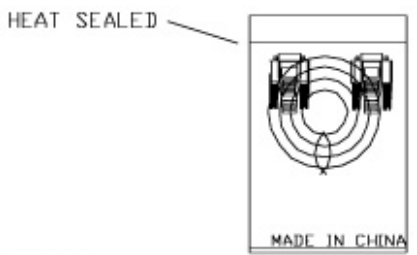

- 1.CABLE:NO UL.,28AWG(7/0.127),TINNED AND STRANDED COPPER WIRE
INSULATOR:PVC,ID:0.85mm ,CABLING:7C+DRAIN WIRE
SHIELD:AL/MY COVERAGE
JACKET:PVC,COMPLIANCE ROHS,COLOR:BEIGE,D.D:5mm
- 2.2PCS CONNECTOR:DB-SUB 9 WAYS FEMALE SOLDER TYPE CONNECTOR
INSULATOR:P.B.T.+GLASS FIBER,COLOR:BLUE
CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATED
SHELL:NICKEL PLATED.
CONNECTOR COMPLIANCE ROHS
- 3.HOOD:PVC MOLDED TYPE WITH FOIL SHIELDED ON INNER
ON INNER MOLD AND INJECTION OUTER MOLD WITH
THUMB SCREW#4-40 UNC
COLOR:BEIGE,COMPLIANCE ROHS
- 4 Fulfill ROHS Guideline
- 5 ELECTRONIC TEST
100% OPEN SHORT+MISS WIRE TEST

DRAWING

DB9PIN JACK(J1)	WIRE	DB9PIN JACK(J2)
2	—————	3
3	—————	2
4	—————	6
5	—————	5
6	—————	4
7	—————	8
8	—————	7
SHELL	DRAIN WIRE	SHELL

PART NO 4070-XX	SHEET NO 1	THIRD ANGLE PROJECTION
TITLE: DB9 PIN FEMALE TO DB9 PIN MALE BEIGE COLOR		SCALE N.T.S DRAWN BY & DATE
DWN NO 1219-05		SIZE A4 UNIT CHECKED BY & DATE
		<input checked="" type="checkbox"/> MM <input type="checkbox"/> INCH APPROVED BY & DATE