




ALL RIGHTS RESERVED. NO PORTION OF THIS INFORMATION, WHETHER IN WHOLE OR IN PART, CAN BE REPRODUCED, COPIED, TRANSMITTED, OR STORED IN A RETRIEVABLE MEDIUM, WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.
SPC-0205.DWG

REVISONS		DDO NO.	SPC-0205	DATE	7/14/02	BY	CDP	NO.	1298
DEF #	REV	DESCRIPTION	DRAWN	DATE	CHECKED	DATE	APPROV	DATE	
1834	A	Released	JIN	2/29/04	JIN	2/29/04	JIN	2/29/04	

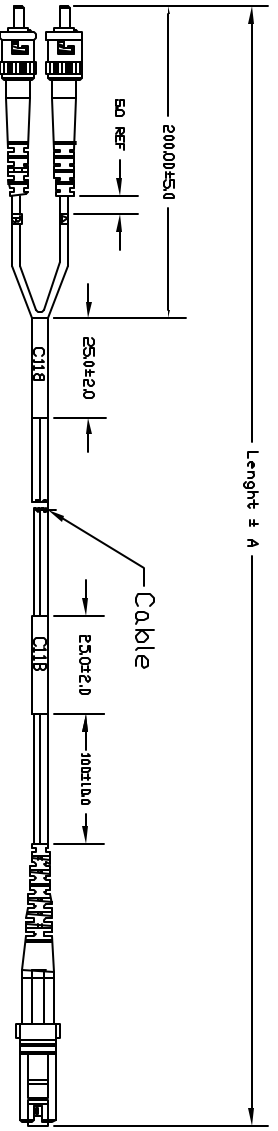

- Notes:
1. New product shall be reference to Ballcore GR-326 standard.
 2. Insertion loss: $\leq 0.2\text{dB}$ typical (1300nm).
 3. Cable Marking:
Baycon Plus Corning MMF-62.5/125 optical fiber cable
DFNR(L) E201648 7/2006 *****M

SPC Type No.	Length (Meters)
SPC19971	1
SPC20005	2
SPC19987	3

TOLERANCES:		DRAWING TITLE:	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	Fiber Optic, Multi-Mode, ST to MTRJ Connectors	TA-831
DRAWN BY: Jason Nash	CHECKED BY: Jason Nash	DATE: 2/29/04	SCALE: NTS
APPROVED BY: Jason Nash	DATE: 2/29/04	SIZE: DMC: NO.	U/DIM: INCHES [mm]
		TA-831	SHEET 1 OF 1

ALL DIMENSIONS AND TOLERANCES SHOWN ON THIS DRAWING ARE UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY. THE DIMENSIONS OF THIS DRAWING ARE NOT TO BE USED FOR THE PURPOSES OF MANUFACTURING OR ASSEMBLY. THE DIMENSIONS OF THIS DRAWING ARE NOT TO BE USED FOR THE PURPOSES OF MANUFACTURING OR ASSEMBLY. THE DIMENSIONS OF THIS DRAWING ARE NOT TO BE USED FOR THE PURPOSES OF MANUFACTURING OR ASSEMBLY.