




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS


DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1906	A	RELEASED	EO	04/17/06	TL	04/17/06	HO	04/17/06
2051	B	Bend Radius Added	JN	06/05/09	JN	06/05/09	JN	06/05/09

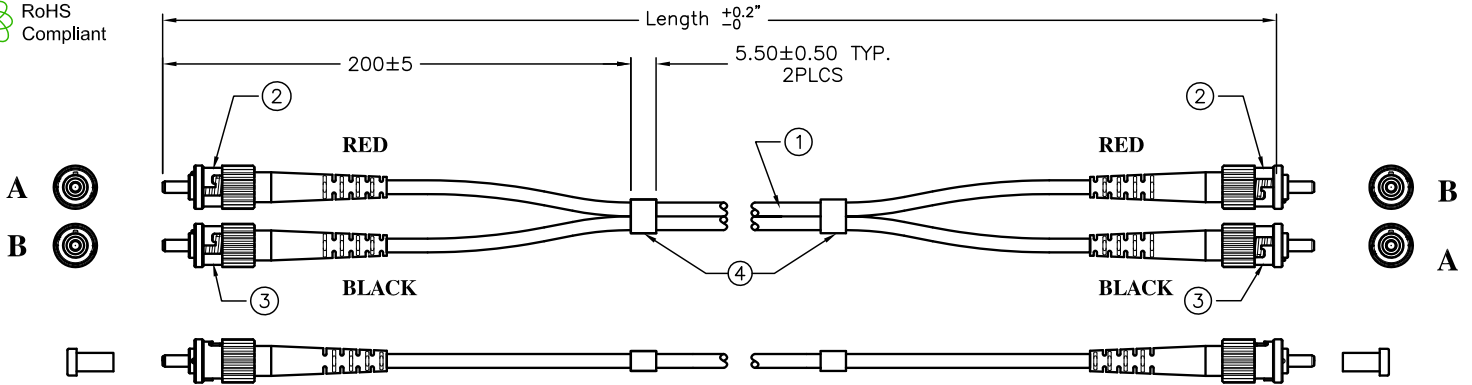

Notes:

1. Meets Bellcore GR-326 Standard.
2. Insertion loss: 0.3dB MAX.
3. Must have "PLUS CORNING FIBER" printed on cable.
4. Bend Radius 10x's Outer Dia Resting
4-5x's Pulling



SPC Type No.	LENGTH (Meters)
SPC19973	1
SPC19981	2
SPC19989	3
SPC19996	5
SPC20003	7

ITEM#	QTY	DESCRIPTION
①	A/R	CABLE, OPTICAL FIBER, MULTI-MODE, DUPLEX, 62.5/125um, OD3.0mm, ZIPCORD, TIGHT, ORANGE PVC JACKET.
②	2	CONNECTOR ACCESSORY, OPTICAL FIBER, ST, MULTI-MODE, CERRAMIC FERRULE, BOOT, RED, POLYVINYL CHLORIDE.
③	2	CONNECTOR ACCESSORY, OPTICAL FIBER, ST, MULTI-MODE, CERRAMIC FERRULE, BOOT, BLACK, POLYVINYL CHLORIDE.
④	A/R	HEAT SHRINK TUBING, BLACK.

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
EKLAS ODISH	04/17/06
CHECKED BY:	DATE:
THOMAS LEE	04/17/06
APPROVED BY:	DATE:
HISHAM ODISH	04/17/06

DRAWING TITLE: Multi Mode Fiber Optic Jumper Cable, Duplex, ST to ST			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-704	TA-704.DWG	B
SCALE: NTS	U.O.M.: meters	SHEET: 1 OF 1	