


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/17/06	MCCORMICK

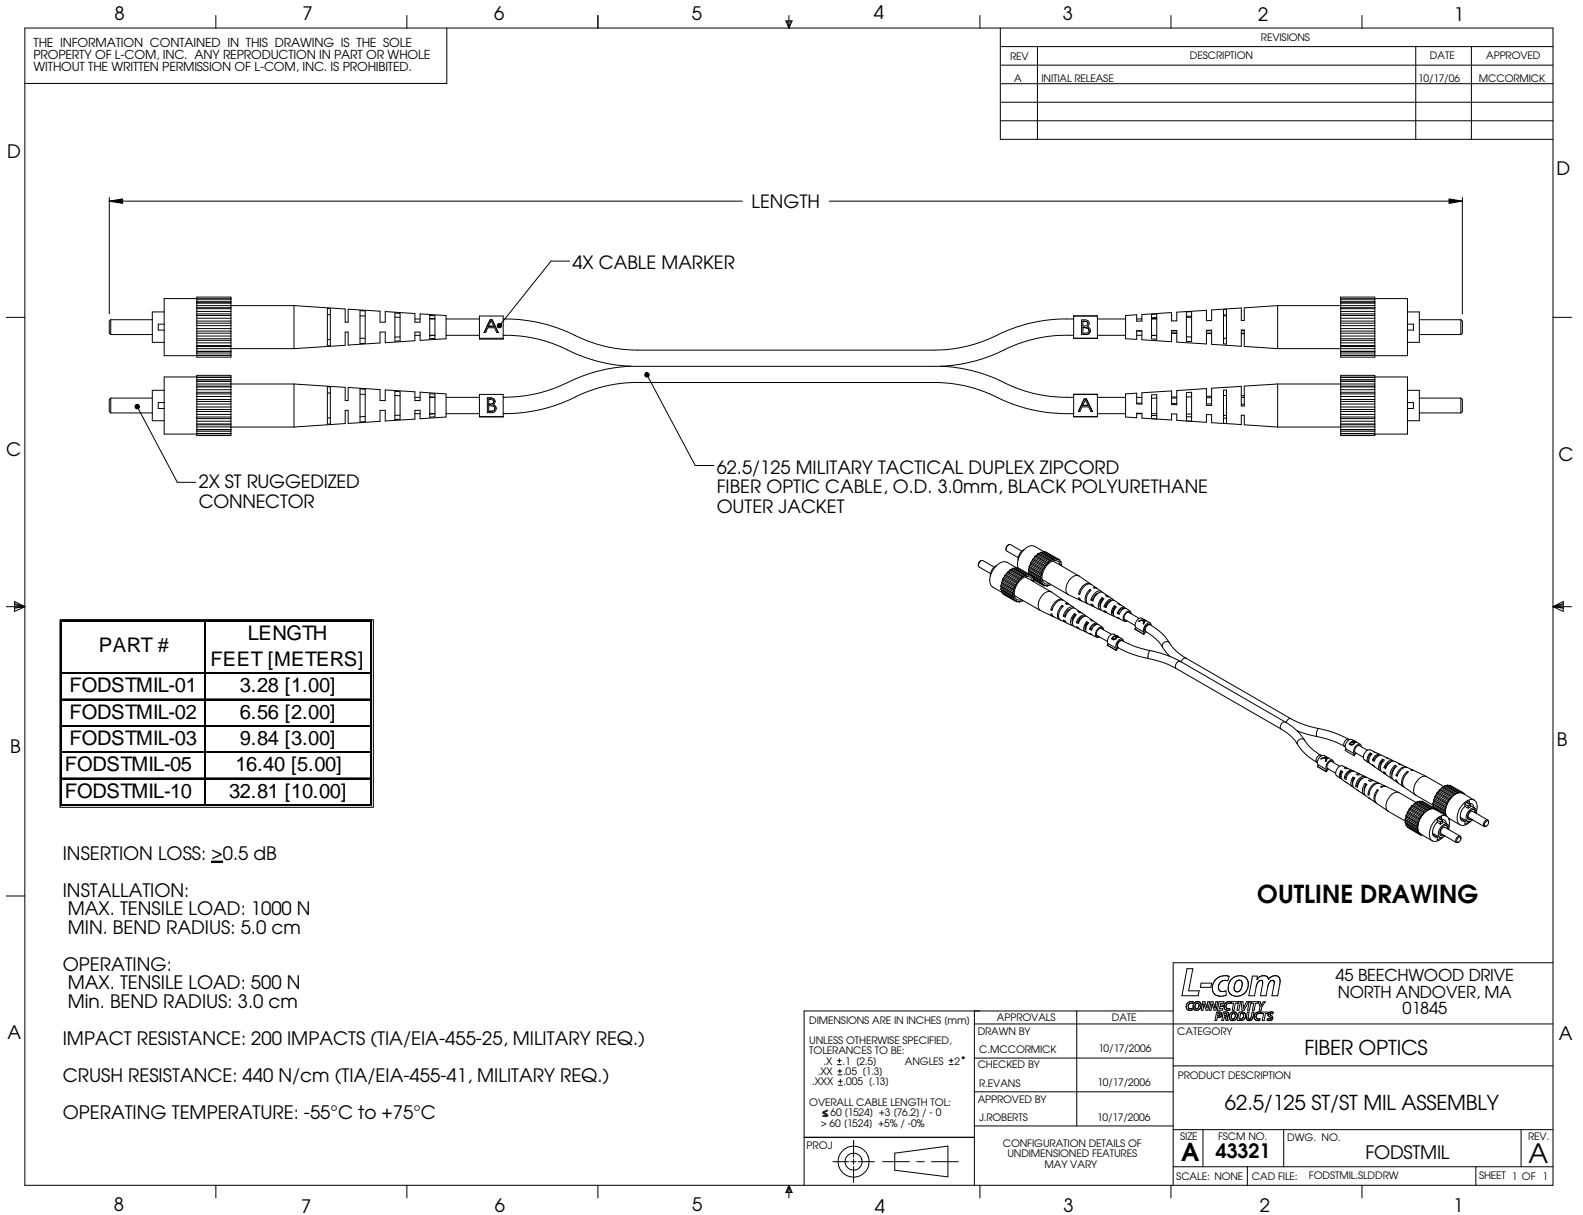

PART #	LENGTH FEET [METERS]
FODSTMIL-01	3.28 [1.00]
FODSTMIL-02	6.56 [2.00]
FODSTMIL-03	9.84 [3.00]
FODSTMIL-05	16.40 [5.00]
FODSTMIL-10	32.81 [10.00]

INSERTION LOSS: ≥ 0.5 dB

INSTALLATION:
 MAX. TENSILE LOAD: 1000 N
 MIN. BEND RADIUS: 5.0 cm

OPERATING:
 MAX. TENSILE LOAD: 500 N
 Min. BEND RADIUS: 3.0 cm

IMPACT RESISTANCE: 200 IMPACTS (TIA/EIA-455-25, MILITARY REQ.)


CRUSH RESISTANCE: 440 N/cm (TIA/EIA-455-41, MILITARY REQ.)

OPERATING TEMPERATURE: -55°C to +75°C

OUTLINE DRAWING

DIMENSIONS ARE IN INCHES (mm) UNLESS OTHERWISE SPECIFIED, TOLERANCES TO BE: .X ± 1 (2.5) ANGLES ± 2° .XX ± .05 (1.3) .XXX ± .005 (1.3) OVERALL CABLE LENGTH TOL: ≤ 60 (1524) +3 (76.2) / -0 > 60 (1524) +5% / -0%	APPROVALS	DATE
	DRAWN BY C.MCCORMICK	10/17/2006
	CHECKED BY REVANS	10/17/2006
	APPROVED BY J.ROBERTS	10/17/2006

L-com CONNECTIVITY PRODUCTS	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CATEGORY FIBER OPTICS
PRODUCT DESCRIPTION 62.5/125 ST/ST MIL ASSEMBLY	
SIZE A FSCM NO. 43321 DWG. NO. FODSTMIL	REV. A
SCALE: NONE	CAD FILE: FODSTMIL.SLDDRW



CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY