


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F006.DWG

REVISONS		DOC. NO. SPC-F006	Effective 7/8/02	DWG No. 1308				
DWG #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1258	A	RELEASED	HO	7/16/02	JVM	7/17/02	DJC	7/17/02

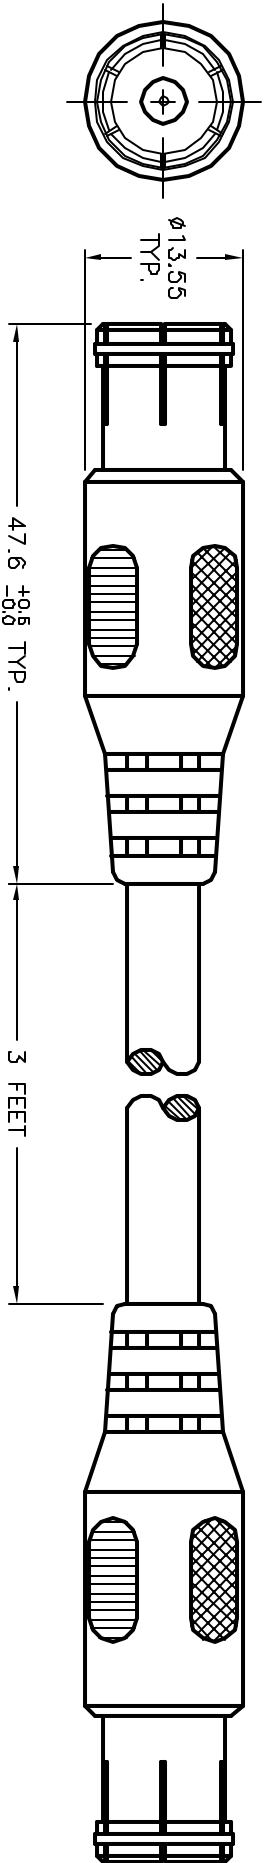

- Specification:
1. Push-On "F" Connector: Brass, Gold-Plated
  2. Cable: RG59/U, Black

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:  
Tolerances Unless  
Otherwise Specified  
.X ±0.2  
.XX ±0.12

DRAWN BY:	DATE:	DRAWING TITLE:		ELECTRONIC FILE	
HISHAM ODISH	7/16/02	COAXIAL CABLE ASSEMBLY		10M8343.DWG	
CHECKED BY:	DATE:	SIZE	DWG. NO.	REV	
JEFF MCVICKER	7/17/02	A	SPC21092	A	
APPROVED BY:	DATE:	SCALE:	NTS	SHEET:	1 OF 1
DANIEL CAREY	7/17/02	U.O.M.: MILLIMETERS			