


# Caliper


- With depth gauge.
- Caliper and slide made of hardened, corrosion-free steel.
- Measuring surface and nonius satin chrome finished.
- Raised sliding surfaces.

## Series 530


with upper locking screw

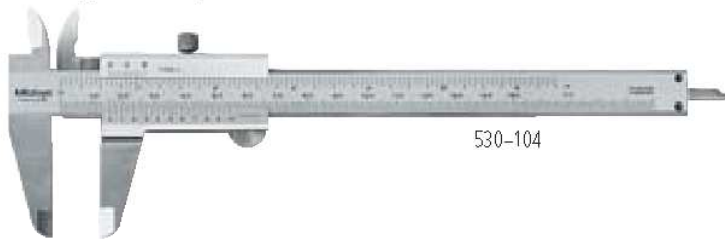

Measuring range mm	No.	Jaw length mm	Nonius		L mm	a mm	b mm	c mm	d mm	Mass g
			top	bottom						
0-150	<b>530-104</b>	40	1/128"	0,05 mm	231	40	21,0	16,5	16	143
0-200	<b>530-114</b>	50	1/128"	0,05 mm	288	50	24,5	20,0	16	180
0-300	<b>530-115</b>	64	1/128"	0,05 mm	403	64	27,5	22,0	20	355
0-150	<b>530-312</b>	40	1/1000"	0,02 mm	231	40	21,0	16,5	16	143
0-200	<b>530-118</b>	50	1/1000"	0,02 mm	288	50	24,5	20,0	16	180
0-300	<b>530-119</b>	64	1/1000"	0,02 mm	403	64	27,5	22,0	20	355
0-150	<b>530-102</b>	40	-	0,05 mm	231	40	21,0	16,5	16	144




Easy reading due to nonius scale inclined by 14 degrees

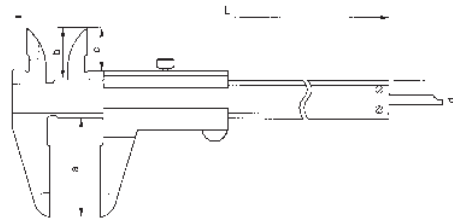


## Series 530


with lower locking screw

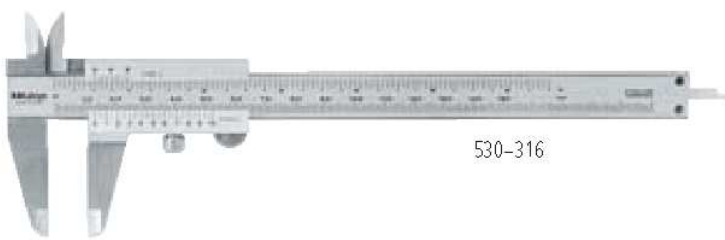

Measuring range mm	No.	Jaw length mm	Nonius		L mm	a mm	b mm	c mm	d mm	Mass g
			top	bottom						
0-150	<b>530-316</b>	40	1/128"	0,05 mm	231	40	21	16,5	16	145
0-150	<b>530-319</b>	40	-	0,05 mm	231	40	21	16,5	16	145



Easy reading due to nonius scale inclined by 14 degrees

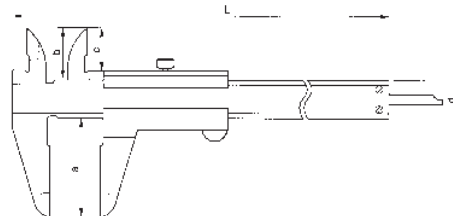


Functions	Series 530
Depth gauge	●

### Specifications

Accuracy: DIN 862  
Delivered in soft case

### Optional accessories

Extension for depth measurement see page 148



### Specifications

Accuracy: DIN 862  
Delivered in soft case

### Optional accessories

Extension for depth measurement see page 148

Metric ISO-Grew				
Mean net ext. Ø mm	Stp. Passo mm	Keep fond mk mm	Boh tap mm	Tap pitch mm
3	0,5	2,46	2,5	
4	0,7	3,34	3,5	
5	0,8	4,24	4,5	
6	1	5,12	5	
8	1,25	6,65	6,8	
10	1,5	8,38	8,5	
12	1,75	10,11	10,2	
16	2	13,95	14	
20	2,5	17,99	17,5	
Whitworth				
Ø in	Ø mm	Ø mm	Ø mm	
1/8	20	4,72	5,0	
3/16	48	5,17	5,5	
1/4	64	7,48	7,7	
5/16	80	9,90	10,25	
3/8	100	12,52	13,25	
1/2	127	16,3	17,25	
5/8	158	20,3	21,25	
3/4	192	24,5	25,25	
7/8	230	29,1	30,25	
1	254	33,7	34,25	
1 1/8	318	41,7	42,25	
1 1/4	354	47,1	47,25	
1 3/8	399	53,7	54,25	
1 1/2	444	60,3	60,25	
1 5/8	499	67,1	67,25	
1 3/4	554	73,7	73,25	
1 7/8	619	80,3	80,25	
2	684	87,1	87,25	
2 1/8	759	93,7	93,25	
2 1/4	834	100,3	100,25	
2 3/8	909	107,1	107,25	
2 1/2	984	113,7	113,25	
2 5/8	1059	120,3	120,25	
2 3/4	1134	127,1	127,25	
2 7/8	1209	133,7	133,25	
3	1284	140,3	140,25	
3 1/8	1359	147,1	147,25	
3 1/4	1434	153,7	153,25	
3 3/8	1509	160,3	160,25	
3 1/2	1584	167,1	167,25	
3 5/8	1659	173,7	173,25	
3 3/4	1734	180,3	180,25	
3 7/8	1809	187,1	187,25	
4	1884	193,7	193,25	
4 1/8	1959	200,3	200,25	
4 1/4	2034	207,1	207,25	
4 3/8	2109	213,7	213,25	
4 1/2	2184	220,3	220,25	
4 5/8	2259	227,1	227,25	
4 3/4	2334	233,7	233,25	
4 7/8	2409	240,3	240,25	
5	2484	247,1	247,25	

With Thread table  
**No. 101995 D**  
on the back side,  
530-316 only