


## ▼ WIDE-ARC PROTRACTOR

**DELA.1880.00**

- Rule length 400 mm.
- Hardened steel.
- Open protractor for angle readings 10 to 170°.
- Protractor Ø 200 mm.
- Degree graduations.
- Sliding rule with locking screw.

ΔΔ: 420 g.

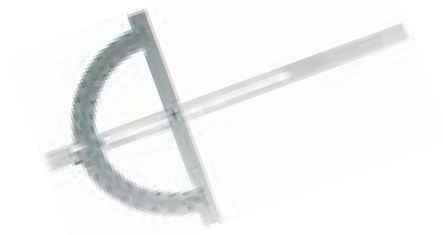

## ▼ BASIC BEVEL PROTRACTOR

**DELA.1897.02**

- Stainless steel, without acute angle attachment.
- Accurate to within 5 minutes of arc.
- Length 300 mm.
- Supplied in a case 370 x 145 x 35 mm.

ΔΔ: 400 g.



## ▼ PRECISION BEVEL PROTRACTOR

**813B.S**

- Hardened stainless steel
  - Anti-glare matt chrome finish
  - Measuring range 0 to 360°.
  - Minimum vernier reading 5 minutes of arc.
  - Dimensions 315 x 75 x 20 mm.
  - Vernier diameter 70 mm.
  - Body graduated in four 90° sectors
  - Rotating dial with vernier.
  - Dial locking screw.
- 315 mm and 200 mm rules with 45° and 60° bevelled ends.
- 90 mm offset rule for small angles.
  - Sliding rule locking screw.
  - x10 magnification.
  - Cast iron support base.
  - Complete with a fitted rigid case 335 x 125 x 47 mm.

ΔΔ: 1.445 kg.

**FEELER GAUGES**

## ▼ LONG METRIC FEELER GAUGES

- Rounded tips.

≡	Number of blades	Blade length mm	Blade width mm	Blade thickness in 1/100 mm	ΔΔ g
<b>804.L</b>	19	150	10	4-5-6-7-8-9-10-15-20-25	100
<b>804.SL</b>	19	250	10	30-35-40-50-60-70-80-90-100	210



## ▼ METRIC FEELER GAUGES

- Blade length 90 mm.

≡	Number of blades	Blade profile	Width x length of blades in mm	Blade thickness in 1/100 mm	ΔΔ g
<b>804</b>	19		10 x 90	4-5-6-7-8-9-10-15-20-25-30	60
<b>804.P</b>	19		10 x 90	35-40-50-60-70-80-90-100	60

