
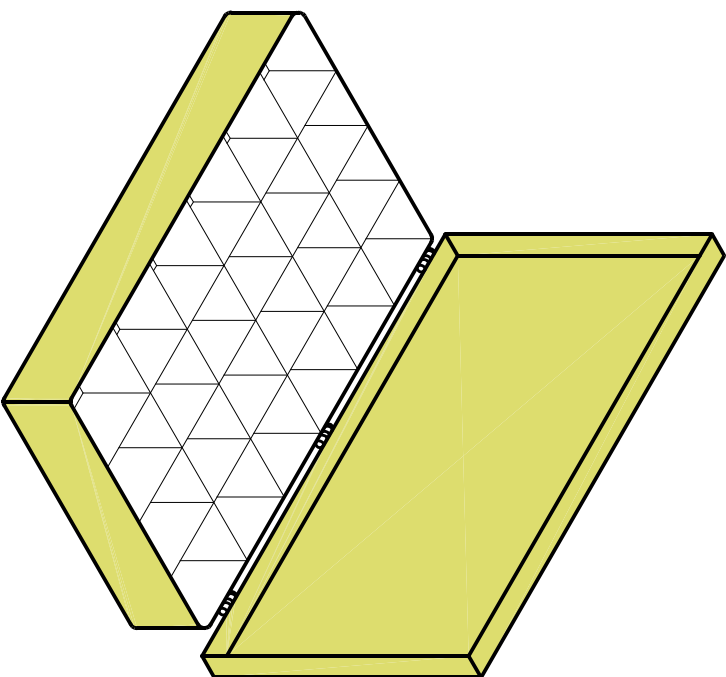


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVOLUTIONS		DOC. NO.	SPC-F005	* Effective:	12/21/98	* DCP No:	880	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
	A	RELEASED	CMD	6/15/88			D.D.	6/15/88
1090	B	REDRAWN & UPDATED	HYO	11/12/01	DJC	11/13/01	DJC	11/13/01

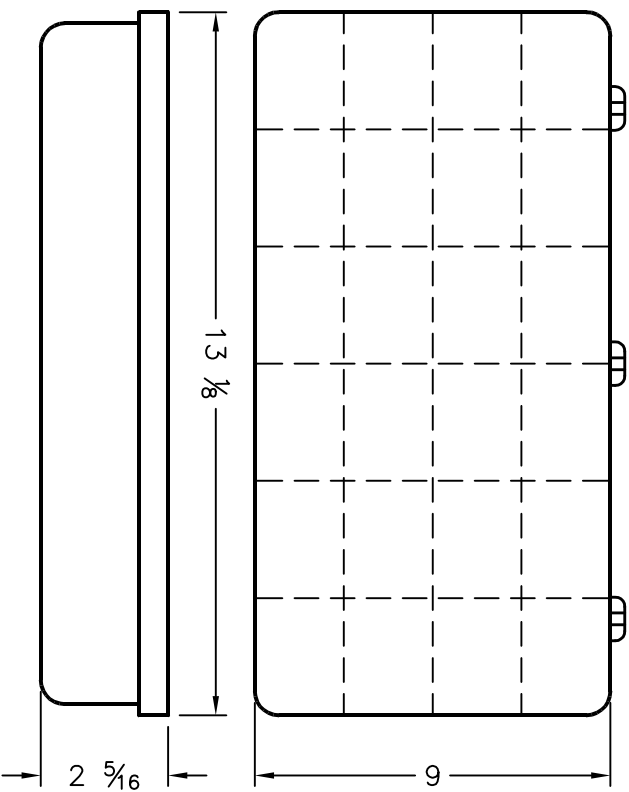

- Specifications:**
1. Material: Carbon filled hi-impact plastic
  2. Built in accordance with guidelines of DOD-HDT3K-263 to bleed off any static charges at a safe controlled rate when properly connected to a ground
  3. Meets ASTM Standard D257 for volume and surface resistivity
  4. Meets MIL B81705 for Static decay

DISCLAIMER:  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL. THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHENEVER IN CONNECTION THEREWITH.



**SPC TECHNOLOGY**

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.		DRAWING TITLE: <b>CONDUCTIVE PARTS BOX, 24 COMPARTMENTS</b>	
DRAWN BY: CMD	DATE: 6/15/88	SIZE A	DWG. NO. CB-8024
CHECKED BY:	DATE:	ELECTRONIC FILE 87N2416.DWG	
APPROVED BY:	DATE: 6/15/88	SCALE: NTS	U.O.M.: INCHES
D.D.		SHEET: 1	OF 1