■ Torqueleader TSC Calibrated and TSP Production Slipper Wrenches

A versatile new range of calibrated and production wrenches based on the proven Torqueleader 'slip free' principle.

TSC Models

Four models covering a torque range of 1 - 10 N.m and 10 - 90 lbf.in.

TSC Calibrated Slipping Wrenches incorporate a micrometer-style fine adjustment with a positive locking system providing fast, easy and accurate setting.

Available with either ISO or imperial scales.

TSP Models


Two models covering a torque range of 1 - 10 N.m and 10 - 90 lbf.in.

TSP Pre-Set Slipping Wrenches are easily set on a Torqueleader TCA Torque Analyser. Adjustment is made using the new 'Double Positive' torque adjustment locking system, ensuring temperproof setting reliability.

Automatic resetting

Automatic audible resetting when the wrench 'slips'. Completely eliminates the possibility of overtightening.

■ Non length dependent

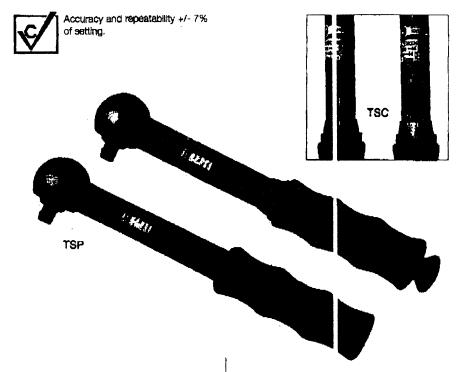

■ Accurate Repeatability

Accurate repeatability for equal tightness every time.

Fine ratchet head

Robust 1/4" square fine ratchet head with fully enclosed multi-lobe carn mechanism.

Rubber grips

Stainless steel heads with direction arrow, aircreft spec. aluminium handles and comfortable nitrile rubber grips with dust caps,

Low mair tenance

No special maintenar ce required.

Versatile

Designed to operate 1 any environment, from the toughest enginee ng production line to the most delicate electric 1 and electronic assembly areas.

Options

Available for anti-ctoc wise use on special request.

■ TSC Wrenches

MODEL	ORDERING CODE	-JRANGE -	INCREMENTS	mm	lua l	om &	D _{ox}	SQUARE DRIVE
TEC 5	056020	1 2 2 2		195	7.68	236	8.3	1/4" Ratchet
TSC 10	058040	N		195	7.68	235	8.9	1/4" Ratuhet
TSC 45	08080	10 – 45 lbf.in	0.5 lbf.Jn	195	7,65	235	8.3	1/4° Ratchet
TSC 90	056060	20 – 90 (brilin	1.0 lbf.ln	195	7.68	236 ·	6.3	1/4" Ratchet

TSP Wrenches

MODEL	ORDERING	-GRANGE C			O		A^A		SQUARE DRIVE
	CODE	Factor	itof.in		mm	ina	gm	æ	
TOP 6/45	056090		10-48		185	7.26	190	6.7	1/4" Ratchet
TSP 10/90	055100	art v	20 - 90		185	7.28	190	6,7	1/4* Ratchel

20