




Wiha. Premium Tools
for Professionals.


Wiha SoftFinish®. The Specialist for Dry & General Applications.

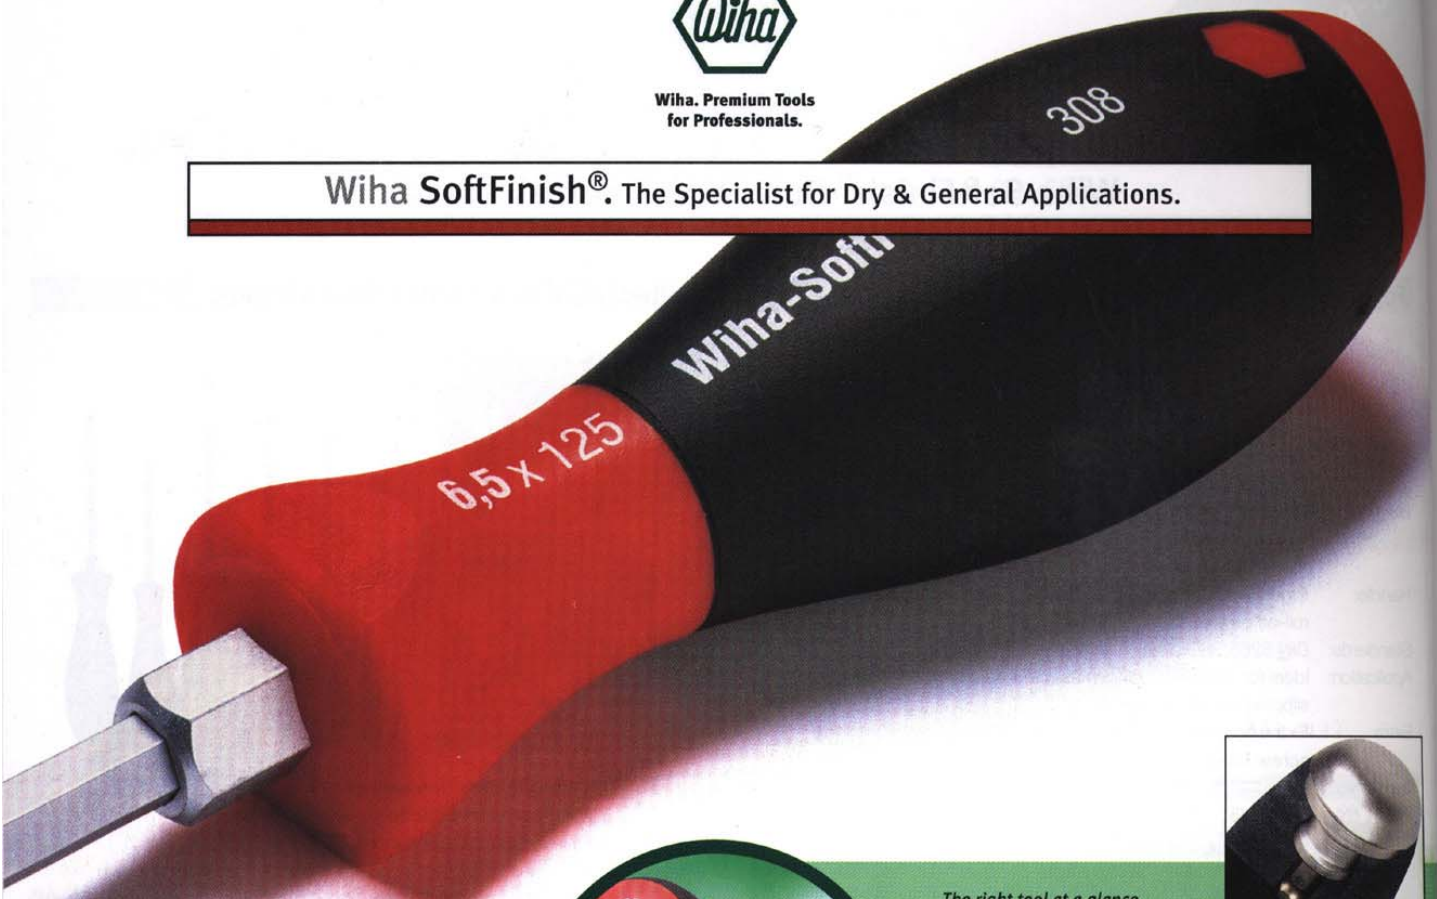

The right tool at a glance, thanks to the printed screw symbol on the handle end.

Due to the solid steel cap and hex blade extending through the handle, there is no loss of impact energy when a precise hammer blow is applied.

Blade with hex bolster for wrenches to use on particularly tight screws.




SoftFinish® Advantages:

- Multi-component SoftFinish® handle provides maximum user comfort
- Ergonomically perfect handle design
- Available in versions with round blade, hex blade or hex blade with solid steel cap
- Blade made of high quality chrome-vanadium-molybdenum steel, through-hardened and chrome plated
- Wiha ChromTop-finish on tip for a perfect fit every time
- Printed screw symbol on handle end for fast identification

The Wiha SoftFinish® zone features a solid moulded core with soft outer grip. This requires less force, yet achieves 40% more torque than conventional handles. The handle is shaped to fit comfortably in the hand, providing maximum torque forces in dry and general working conditions.

If a stuck screw has to be loosened, a precise hammer blow can be applied to the solid steel cap. Due to the hex blade extending through the handle to the steel cap, there is no loss of impact energy.

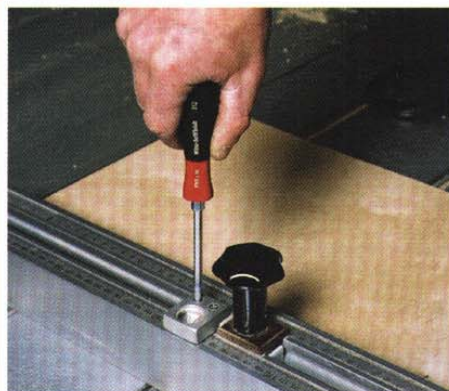



Wiha. Premium Tools
for Professionals.

Wiha SoftFinish®. The Specialist for Dry & General Applications.

For Hex Nuts.



341 Nut Driver.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Deep drawn socket.

Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Standards: DIN 3125.

Application: Especially for dry and general applications.

Order-No.	Ø:	—	—	—	—
01018	8	4	125	236	30 10
01020	1	5	125	236	30 10
01021	8	5.5	125	236	30 10
01022	5	6	125	236	30 10
01023	2	7	125	243	36 10
01024	9	8	125	243	36 10
01025	6	9	125	243	36 10
01026	3	10	125	243	36 10
01027	0	11	125	249	41 5
01028	7	12	125	249	41 5
01029	4	13	125	249	41 5
01030	0	14	125	249	41 5
01031	7	15	125	249	41 5
01032	4	16	125	249	41 5
01033	1	17	125	249	41 5

For Hex and Triangular Nuts.



343 Stubby Nut Driver.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Deep drawn socket.

Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Application: For working in confined spaces.

Order-No.	Ø:	—	—	—	—
01076	8	5.5	65	176	30 10
01077	5	6	65	176	30 10
01078	2	7	65	183	36 10
01079	9	8	65	183	36 10
01081	2	10	65	183	36 10



372 Nut Driver.

Shaft: **Flexible shaft for hard to reach areas.**
Deep drawn socket, nickel-plated.

Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Application: E.g. for tightening hose clamps.

Order-No.	Ø:	—	—	—	—
01435	3	5	150	261	30 10
01436	0	5.5	150	261	30 10
01437	7	6	150	261	30 10
01438	4	7	150	268	36 10
01439	1	8	150	268	36 10
01440	7	10	175	293	41 10
01443	8	13	175	293	41 5



347 Nut Driver.

Round blade, hex bolster for additional torque.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Deep drawn socket.

Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Standards: DIN 3125.

Application: Especially for dry and general applications.

Order-No.	Ø:	—	—	—	—
01092	8	7	125	238	10 36 10
01093	5	8	125	238	10 36 10
01094	2	9	125	238	10 36 10
01095	9	10	125	238	10 36 10
01096	6	11	125	246	13 41 5
01097	3	12	125	246	13 41 5
01098	0	13	125	246	13 41 5

347 Inch Nut Driver.

Hex bolster. Inch Sizes.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Deep drawn socket.

Order-No.	Ø:	—	—	—	—
02836	7	3/16"	125	231	10 30 10
02837	4	1/4"	125	238	10 36 10
02838	1	5/16"	125	238	10 36 10
02839	8	3/8"	125	238	10 36 10
02840	4	7/16"	125	246	13 41 10
02841	1	1/2"	125	246	13 41 10



344 Triangular Nut Driver.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Standards: DIN 22416.

Application: For triangular screws DIN 22424 and triangular nuts DIN 22425.

Order-No.	Ø:	—	—	—	—
26212	9	M4	125	236	30 10
26213	6	M5	125	236	30 10
26216	7	M6	125	236	30 10
26214	3	M8	125	243	36 10
26217	4	M10	125	243	36 10
26218	1	M12	125	249	41 10