


# Pressure Switch

## Vacuum - High Current



### Features:

- Controllable hysteresis (deadband).
  - Field adjustable vacuum set point, from -3 inches H<sub>2</sub>O to -12 psi. (-2 inches H<sub>2</sub>O available as fixed as point).
  - Snap action basic switch, up to 25A\*, 125/250 V ac.
  - 0.250 inches diameter; 1/8 inches NPT; or 1/4 inches quick connect fitting port.
  - Custom design and engineering available.
  - Small size, lightweight, low relative cost.
  - Dependable long life (10+ million cycles).
- \*Not available on all ranges.

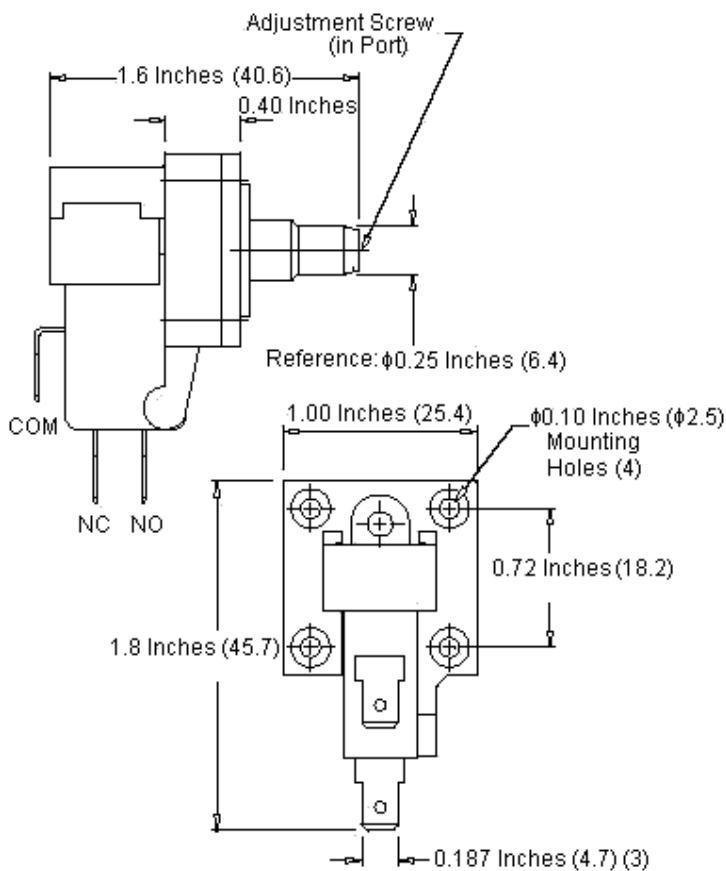

Dimensions: Inches (Millimetres)

### Description:

The versatile high-current PSF109S vacuum switch offers a controllable hysteresis (deadband); a wide-range field adjustable set point; snap action; and choice of standard vacuum port design options. For custom applications, our in-house design and engineering team provide rapid prototyping and manufacturing turnaround.

<http://www.farnell.com>  
<http://www.newark.com>  
<http://www.cpc.co.uk>



# Pressure Switch

## Vacuum - High Current



### Specifications:

#### Mechanical:

Standard tolerance :  $\pm 20\%$  (tighter tolerances available).  
 Switch type : SPDT normally open or normally closed.  
 Switching medium : Air, compatible fluids.  
 Mechanical life : More than 10 million cycles.  
 Operating temperature :  $+40^{\circ}\text{F}$  to  $+150^{\circ}\text{F}$  (standard),  $-46^{\circ}\text{F}$  to  $+205^{\circ}\text{F}$  (contact us).

#### Physical:

Case material : Polycarbonate (optional: Lexan 141, Supec<sup>®</sup> Ultem<sup>®</sup>, Noryl<sup>®</sup>).  
 Vacuum port options : 0.250 inches diameter, 1/8 inches NPT, quick connect fitting port.  
 Diaphragm material : Polyurethane (Teflon<sup>®</sup> optional).  
 Contact points : Silver (gold available on special order).  
 Electrical connectors : Terminals- 0.187 inches x 0.020 inches tab-type for use with quick disconnects (ref. AMP #2-520182-2 or equivalent) 0.250 inches available - contact us.  
 Mounting : #2 screws through eyelets; mounting bracket available.  
 Weight : Less than 20grams.

#### Electrical:

Current rating : Varies by option - see adjustable vacuum set point options next page.  
 Operating voltage : 125/250V ac - see adjustable vacuum set point options.

### Specification Table

Description	-In. Hg	-In.H <sub>2</sub> O	-mbar	-psi	Port Style (Inches)	Electrical 125/250V ac	Part Number
Pressure Switch, 0.1 - 0.03psi	0.2205 to 0.5878	3 to 8	8 to 20	0.1 to 0.3	1/8 NPT	3A	PSF109S-3-8
Pressure Switch, 0.03 - 2.9psi	0.6613 to 5.878	9 to 80	21 to 199	0.3 to 2.9	0.250 diameter	10A	PSF109S-9-80
Pressure Switch, 2.9 - 11.9psi	5.951 to 24.25	81 to 300	200 to 822	2.9 to 11.9		15A	PSF109S-81-330

**Disclaimer** This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2009.

<http://www.farnell.com>  
<http://www.newark.com>  
<http://www.cpc.co.uk>

