MICRO SWITCH
FREEPORT, ILLINOIS, U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91149

SWITCH- ENCLOSED

CATALOG LISTING
BZLN-RH5

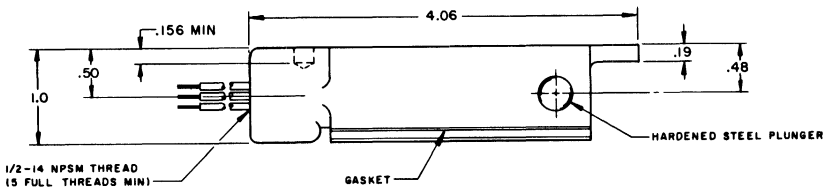

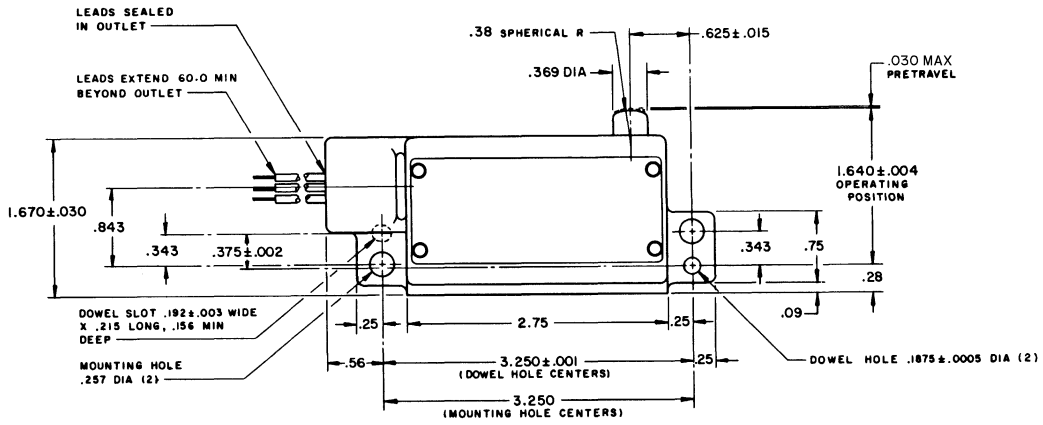

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	
OPERATING FORCE	5 LB MAX
RELEASE FORCE	1 LB MIN
DIFFERENTIAL TRAVEL	.004 MAX
OVERTRAVEL	.203 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

-L96- 15 A-125, 250, OR 480 VAC
1/2 A-125 VDC; 1/4 A-250 VDC
1/8 HP-125 VAC; 1/4 HP-250 VAC

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .720 LB PLUS LEADS

WIRING CONNECTIONS—
COMMON - BLACK LEAD
NORMALLY OPEN - BLUE LEAD
NORMALLY CLOSED - RED LEAD

BZLN-RH5 | REPLACES | RELEASE NO. M | DRAWING NUMBER 15 | ISSUE 17 | CHECK

REVISIONS

A	C019597	M B F 9 NOV 64
B	C030714	J W 27 APR 82
C	C055988	M A M 31 OCT 84
D	C0-81715	A F 26 SEP 95

DRAWN M B F 5 NOV 64 CHECK | 13 NOV 64 CHECK

FORMTEK

Downloaded from Elcodis.com electronic components distributor