


**MICRO SWITCH**  
 FEDERAL REGISTERED TRADEMARK  
 FED. MFR. CODE 91929

**SWITCH - ENCLOSED**

CATALOG LISTING  
**BZV6-2RN4**

M

**BZV6-2RN4**  
 DRAWING NUMBER SR 9893  
 ISSUE 8  
 REVISIONS:  
 A 17653  
 B 30 JAN 64  
 C 0050398  
 D B W  
 12 APR 64  
 C 0050398  
 J A P  
 2 MAR 84  
 D 0055989  
 C 00  
 8 NOV 84  
 E 154958-D  
 23 SEP 80  
 F 0072661  
 D A W  
 10 SEP 98  
 G 17779-1  
 H MAY  
 17 MAR 94  
 K L B 05 OCT 01  
 GCH 200274  
 02 00 00 00

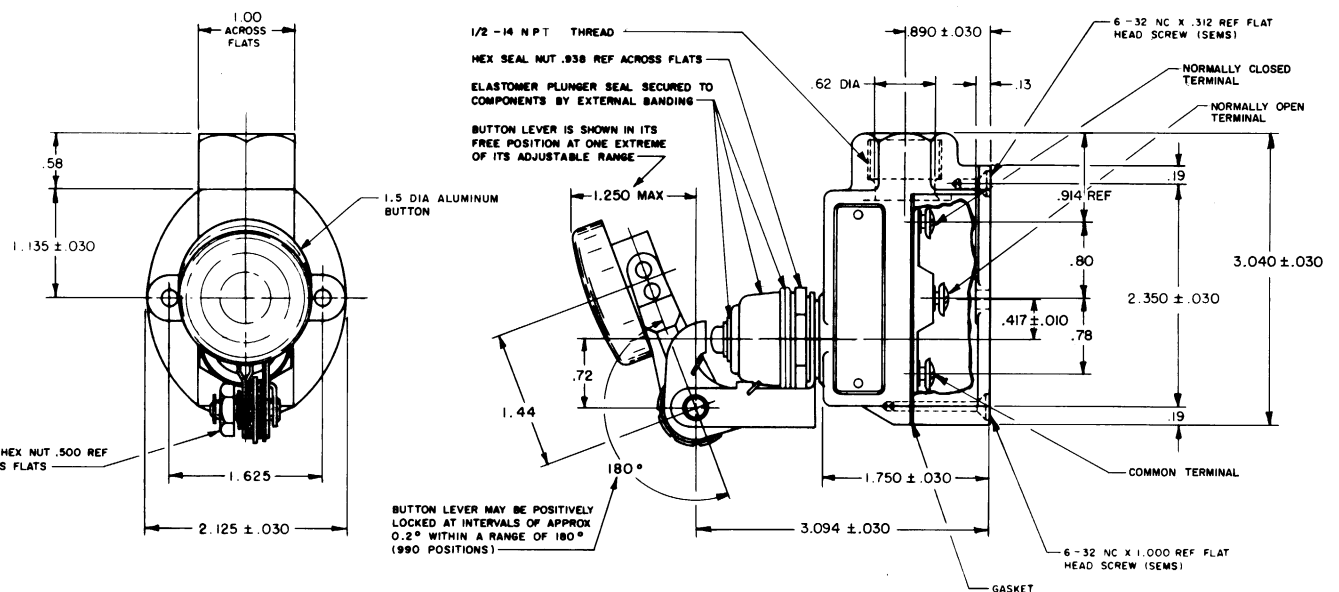

NOTE -  
 1 - 6-32 NC X .219 REF TERMINAL SCREW AND CUPWASHER (3)  
 2 - BUTTON LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 10-20 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 6 OZ MIN	15A-125, 250 OR 480 VAC; 2A-600 VAC -L74- 1/8HP-125 VAC; 1/4HP-250 VAC 1/2A-125 VDC; 1/4A-250 VDC	UNLESS OTHERWISE SPECIFIED
PRETRAVEL ----- .188 MAX		DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL ----- .006 MAX		TOLERANCES ARE:
OVERTRAVEL ----- .219 MIN		ONE PLACE ( .0 ) ± .010 TWO PLACE ( .00 ) ± .008 THREE PLACE ( .000 ) ± .005 ANGLES ±
SWITCH - BASIC REPLACEMENT --- BZ - 2RN702		WEIGHT .76 LB