MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FED. MFR. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
DTE6-2RQ9

DRAWING NUMBER M DTE6-2RQ9
ISSUE A B 11
RELEASE NO. SR 11036
14FEB06
REPLACES
BP
CHECK
29 MAY 63
ENG
CHECK
DRAWN
29 MAY 63
MBF
PD-80378-003

REVISIONS

A	SR 11036	MBF 29 MAY 63	
B	CO 20728	MBF 18 NOV 65	
C	CO26581	OMW 6 NOV 69	
D	CO 53191-D	KJS 1 MAR 84	
E	C055989	CJH NOV 84	
F	C054958	TSK 26 FEB 88	
G	C072661	DRW 8 SEP 92	
H	CO 77486C	SAD 20 JAN 94	
J	0016894	KRB 10 NOV 05	
K	0018962	VKR 14FEB06	

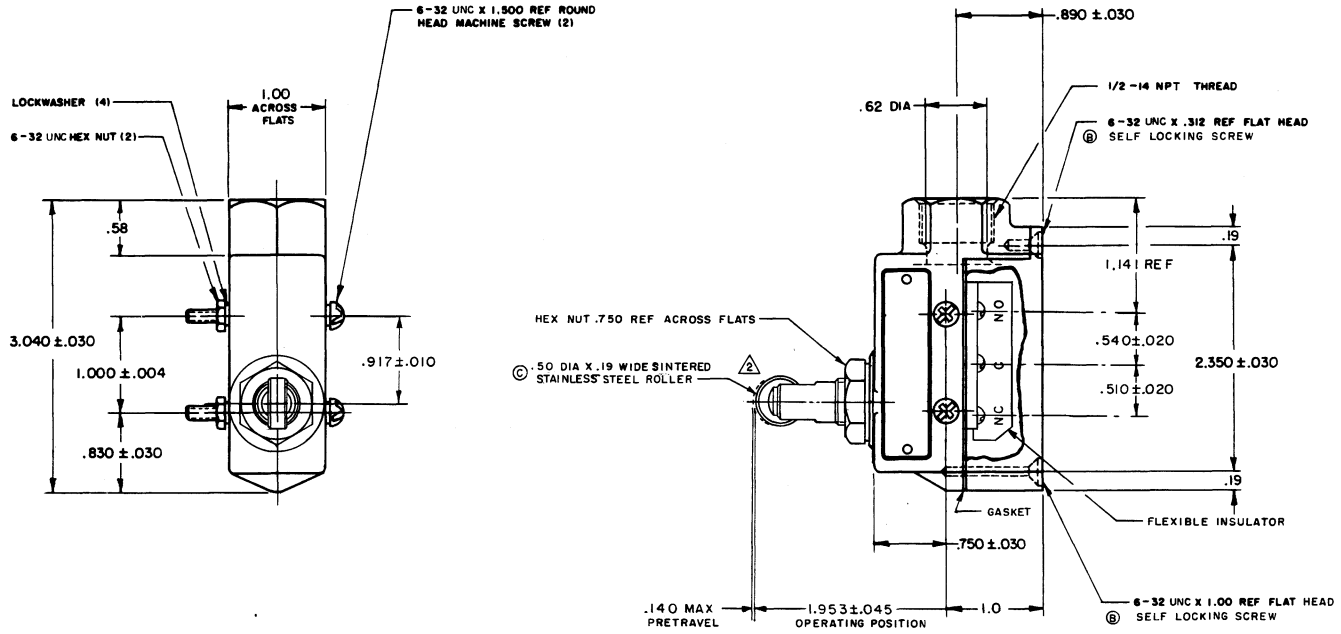

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	
OPERATING FORCE — — — 1 1/2 - 3 LB	CONTACT ARRANGEMENT D P D T	SCALE FULL
RELEASE FORCE — — — — 8 OZ MIN	-L59- 10 A-125 OR 250 VAC; 0.3 A-125 VDC; 0.15 A-250 VDC	DO NOT SCALE PRINT
Ⓑ DIFFERENTIAL TRAVEL — — — .060 MAX		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
OVERTRAVEL — — — — — .125 MIN		TOLERANCES ARE: ONE PLACE (.0) ±.030; TWO PLACE (.00) ±.015; THREE PLACE (.000) ±.005; ANGLES ±1°
SWITCH-BASIC REPLACEMENT- DT-2R3-A7		WEIGHT .56 LB

Ⓒ NOTE —
Ⓑ 1 — 4-40 UNC X.125 **REF TERMINAL SCREW AND** LOCKWASHER (6)
2 ROLLER MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
3 - SEAL RATING: NEMA 1
IP40

Downloaded from Elcodis.com electronic components distributor