



Positive opening operation according to DIN EN 60947-5-1 IEC 947-5-1

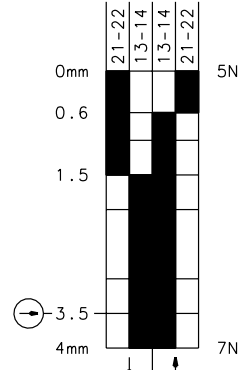

Switching diagram

Switching symbol

Tolerance: operating point $\pm 0.25\text{mm}$; actuating force $\pm 10\%$

Schutzvermerk nach DIN 34 beachten
Copyright reserved

23.10.2000

Mechanical features

Enclosure: PBT, glass fibre reinforced
Cover: PA6.6, black
Actuator: Roller (Thermoplast)

Ambient air temperature: -30°C up to $+80^{\circ}\text{C}$
Contact type: 1 NC-contact, 1 NO-contact (Zb)
Galvanic isolation of contacts: Switching circuits with different electrical potential

Mechanical life: 3×10^6 switch operations
Switch frequency: max. 100/min
Mounting: 2xM4 or 2xM5 fixed positioning for safety applications
Connection type: 4 screw connections (M3.5)
Conductor cross-section: single core 0.5-1.5mm² / litz wire with connector sleeve 0.5-1.5mm²
Cable entry size: 1 x Pg9
Weight: approx. 0,05kg

Electrical features

Max. voltage: 250 V AC
Max. enduring current: 1 th 10A
Max. inrush current: according to IEC 947-5-1
Utilization categorie: AC 15,A300 240V/3A, 120V/6A / DC 13,Q300 250V/0.27A, 125V/0.55A
Standards: according to EN 60947-1; EN 60947-5-1
Protection class (IP-Code): IP65 according to EN 60529; DIN VDE 0470 T1
CSA/UL: 10A 300V AC, A300
Short-circuit protection: Fuse 6A gL/gG, IEC/EN 60947-5-1, appendix K

Approach possibilities
Actuator not re-arrangeble

Remarks

The moving parts should be oiled periodically.
The planned protection class (IP-Code) is valid only at closed cover and when using an at least equivalent cable gland.