


# ABB component drives

## ACS55, 0.18 to 2.2 kW / 0.25 to 3 hp

### Technical catalogue

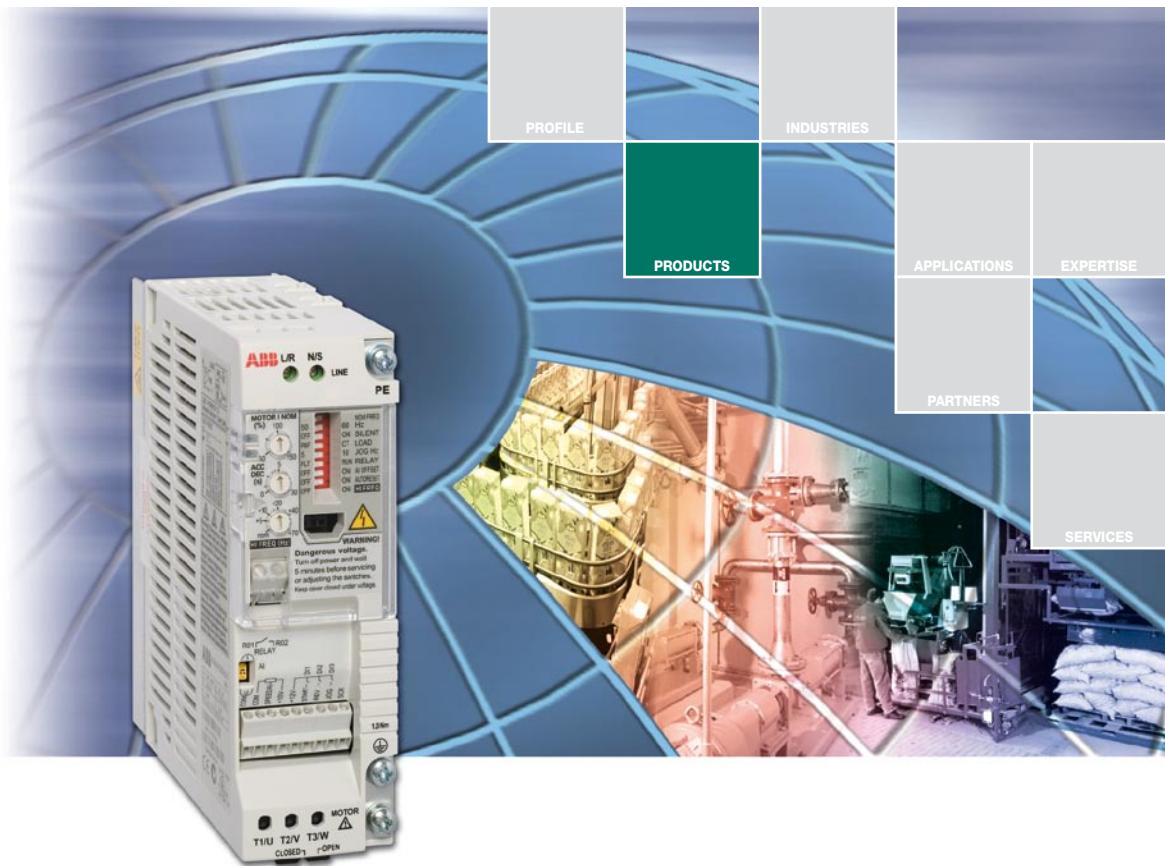

**ABB**



# ABB component drives

## ABB component drives

ABB component drives meet the requirements of OEMs, installation companies and panel builders. These drives are components that are bought together with other components from a logistical distributor. The drives are stocked, and the number of options and, variants is optimized for logistical distribution.

## Highlights

- Descriptive interface
- Compact and slim
- Fast and safe drive configuration with DriveConfig kit
- Ideal for DIN-rail mounting
- Suitable for domestic environment as standard
- Silent motor

## Applications

- Fans
- Pumps
- Gate control
- Material handling
- Conveyors

Features	Benefits	Notes
Descriptive interface	Faster set-up Easier configuration Easier drive for new users	Basic parameter settings are done with DIP switches and potentiometers
Compact and slim	Less space required for installation	0.18 to 0.37 kW 45 mm width 0.75 kW 67.5 mm width 1.5 to 2.2 kW 70 mm width
DriveConfig kit	Fast and safe configuration of unpowered drives	New drive configuration tool for volume manufacturing
Removable mounting clip	Flexible and easy mounting	Removable clip allows DIN-rail and wall mounting from back and side of the unit
EMC	Low EMC emissions	1 <sup>st</sup> environment EMC filters as standard
Automatic switching frequency	Provides lowest possible noise without decreased derating of the drive	Increases switching frequency automatically, when drive temperature is decreased

# Ratings, types and voltages



$P_N$ kW	$P_N$ hp	Output current nominal A	max A	Input current A	Type code	Frame size	H1 mm	H2 mm	W mm	D mm	Weight kg
-------------	-------------	--------------------------------	----------	-----------------------	-----------	---------------	----------	----------	---------	---------	--------------

**Inbuilt EMC filter, 1-phase supply voltage 200/240 V, +10/-15%, 3-phase output 200/240 V**

0.18	0.25	1.4	2.1	4.4	ACS55-01E-01A4-2	A	170	146.5	45	128	0.65
0.37	0.5	2.2	3.3	6.9	ACS55-01E-02A2-2	A	170	146.5	45	128	0.7
0.75	1.0	4.3	6.5	10.8	ACS55-01E-04A3-2	B	170	146.5	67.5	128	0.7
1.5	2	7.6	11.4	18.2	ACS55-01E-07A6-2	D	226	203	70	159	1.1
2.2	3	9.8	14.7	22	ACS55-01E-09A8-2	D	226	203	70	159	1.1

$P_N$ kW	$P_N$ hp	Output current nominal A	max A	Input current A	Type code	Frame size	H1 mm	H2 mm	W mm	D mm	Weight kg
-------------	-------------	--------------------------------	----------	-----------------------	-----------	---------------	----------	----------	---------	---------	--------------

**No EMC filter, 1-phase supply voltage 200/240 V, +10/-15%, 3-phase output 200/240 V**

0.18	0.25	1.4	2.1	4.4	ACS55-01N-01A4-2	A	170	146.5	45	128	0.65
0.37	0.5	2.2	3.3	6.9	ACS55-01N-02A2-2	A	170	146.5	45	128	0.7
0.75	1.0	4.3	6.5	10.8	ACS55-01N-04A3-2	B	170	146.5	67.5	128	0.7
1.5	2	7.6	11.4	18.2	ACS55-01N-07A6-2	C	194	171	70	159	1.1
2.2	3	9.8	14.7	22	ACS55-01N-09A8-2	C	194	171	70	159	1.1

$P_N$ kW	$P_N$ hp	Output current nominal A	max A	Input current A	Type code	Frame size	H1 mm	H2 mm	W mm	D mm	Weight kg
-------------	-------------	--------------------------------	----------	-----------------------	-----------	---------------	----------	----------	---------	---------	--------------


**Inbuilt EMC filter, 1-phase supply voltage 110/120 V, +10/-15%, 3-phase output 200/240 V**


0.18	0.25	1.4	2.1	6.4	ACS55-01E-01A4-1	A	170	146.5	45	128	0.65
0.37	0.5	2.2	3.3	9.5	ACS55-01E-02A2-1	A	170	146.5	45	128	0.7

$P_N$ kW	$P_N$ hp	Output current nominal A	max A	Input current A	Type code	Frame size	H1 mm	H2 mm	W mm	D mm	Weight kg
-------------	-------------	--------------------------------	----------	-----------------------	-----------	---------------	----------	----------	---------	---------	--------------

**No EMC filter, 1-phase supply voltage 110/120 V, +10/-15%, 3-phase output 200/240 V**

0.18	0.25	1.4	2.1	6.4	ACS55-01N-01A4-1	A	170	146.5	45	128	0.55
0.37	0.5	2.2	3.3	9.5	ACS55-01N-01A4-1	A	170	146.5	45	128	0.6

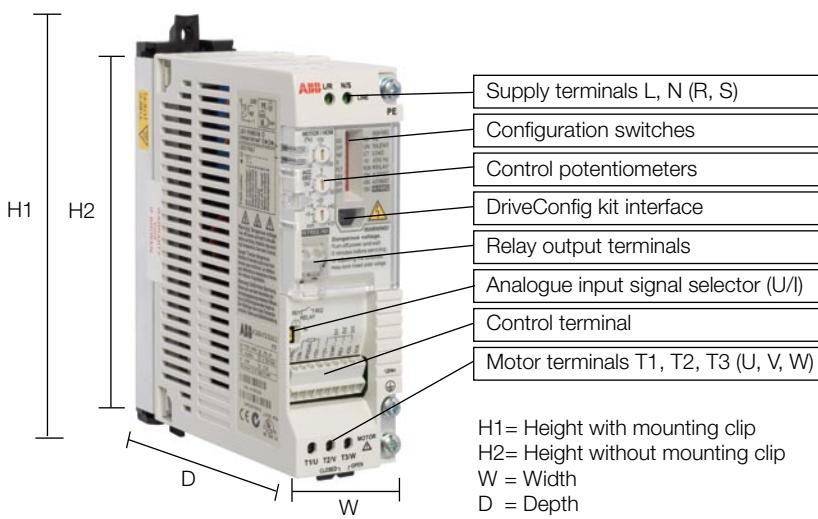



# Options

## DriveConfig kit

The DriveConfig kit is a PC tool for volume configuration and control of ACS55 drives. The kit enables parameter setting and software updating without the need for a power connection. The drives can even remain in their delivery boxes during configuration. The DriveConfig kit features on-line drive control and monitoring of up to four signals simultaneously. Together with ACS55 drives, the DriveConfig kit brings additional value to processes by saving time and ensuring safety.

### DriveConfig kit includes:

- Hardware and cables
- PC software
- User's manual in English (hardcopy and PDF)
- Battery charger
- Serial port / USB adapter

### DriveConfig kit requirements:


- PC with Microsoft Windows 2000/XP operating system
- Free serial or USB port from the PC

## Potentiometer


The ACS50-POT potentiometer is an option for ACS55 drives. Two switches are included in addition to the potentiometer for drive control; start / stop and forward / reverse. The ACS50-POT potentiometer does not require any external power source.



# Technical specification



Mains connection		Control connections	
Power range	0.18 to 2.2 kW		
Voltage	1-phase, 110 to 120 V and 200 to 240 V, +10/-15%		
Frequency	48 to 63 Hz		
Motor connection		Control connections	
Voltage	3-phase, from 0 to $U_{\text{SUPPLY}}$ (for 110/120 V from 0 to 230 V)	One analog input	0 (2) to 10 V, 200 kΩ single-ended
Frequency	0 to 120/130 Hz	Current signal	0 (4) to 20 mA, 100 Ω single-ended
Overload capacity	150% (60 s)	Potentiometer reference value	10 V ±2% max. 10 mA, 1 kΩ ≤ R ≤ 10 kΩ
Switching frequency		Response time	≤ 60 ms
Standard	5 kHz, adjustable up to 16 kHz with automatic switching frequency reduction	Resolution	0.1%
Acceleration time	0.1 to 30 s	Accuracy	±1%
Deceleration time	0.1 to 30 s	Three digital inputs	12 V DC with internal or 12 to 24 V DC external supply, PNP
		Input impedance	1.5 Ω
		Response time	≤ 9 ms
		One relay output	
		Switching voltage	12 to 250 V AC or max 30 V DC
		Maximum continuous current	2 A
Environmental limits		Product compliance	
Ambient temperature		Low Voltage Directive 73/23/EEC with supplements EMC Directive 89/336/EEC with supplements Quality assurance system ISO 9001 and Environmental system ISO 14001 CE, UL, cUL, C-Tick and GOST R approvals	
0 to 40 °C	with nominal current and 5 kHz switching frequency		
up to 50 °C	with derating		
-20 °C	with restrictions		
Altitude		EN 61800-3/A11 (2000), product standard	
Output current	Nominal current : 0 to 1000 m reduced by 1% per 100 m over 1000 m to 2000 m	EN 61800-3 (2004), product standard	
Relative humidity	lower than 95% (without condensation)	EN 55011, product family standard for industrial, scientific and medical (ISM) equipment	
Degree of protection	IP20		
Contamination levels	No conductive dust allowed, corrosive liquids or gases (IEC 60721-3-3)		

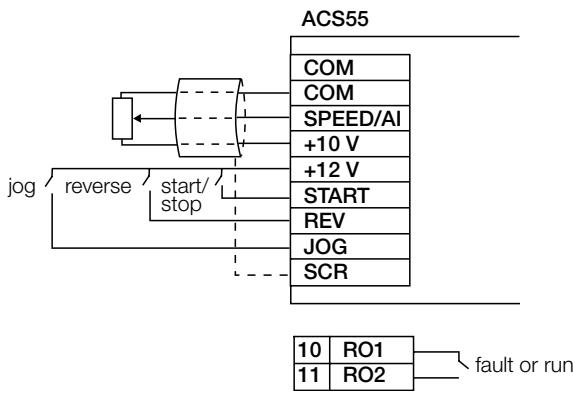

## Product compliance

Low Voltage Directive 73/23/EEC with supplements  
EMC Directive 89/336/EEC with supplements  
Quality assurance system ISO 9001 and Environmental system ISO 14001  
CE, UL, cUL, C-Tick and GOST R approvals

## EMC standards in general

EN 61800-3/A11 (2000), product standard	EN 61800-3 (2004), product standard	EN 55011, product family standard for industrial, scientific and medical (ISM) equipment
1 <sup>st</sup> environment, unrestricted distribution	Category C1	Group 1 Class B
1 <sup>st</sup> environment, restricted distribution	Category C2	Group 1 Class A
2 <sup>nd</sup> environment, unrestricted distribution	Category C3	Group 2 Class A
2 <sup>nd</sup> environment, restricted distribution	Category C4	Not applicable



**ABB Oy**

Drives

P. O. Box 184

FI - 00381 Helsinki

Finland

Telephone +358 10 22 11

Fax +358 10 222 3764

Internet <http://www.abb.com/drives>



441

024

Printed matter

HANSAPRINT/xxxxxx/2007