




| REVISIONS |                                 |          |      |
|-----------|---------------------------------|----------|------|
| REV       | DESCRIPTION                     | DATE     | NAME |
| A         | Initial Release.                | 05-07-09 | AMH  |
| B         | Updated temp spec and labelling | 08-17-09 | AMH  |

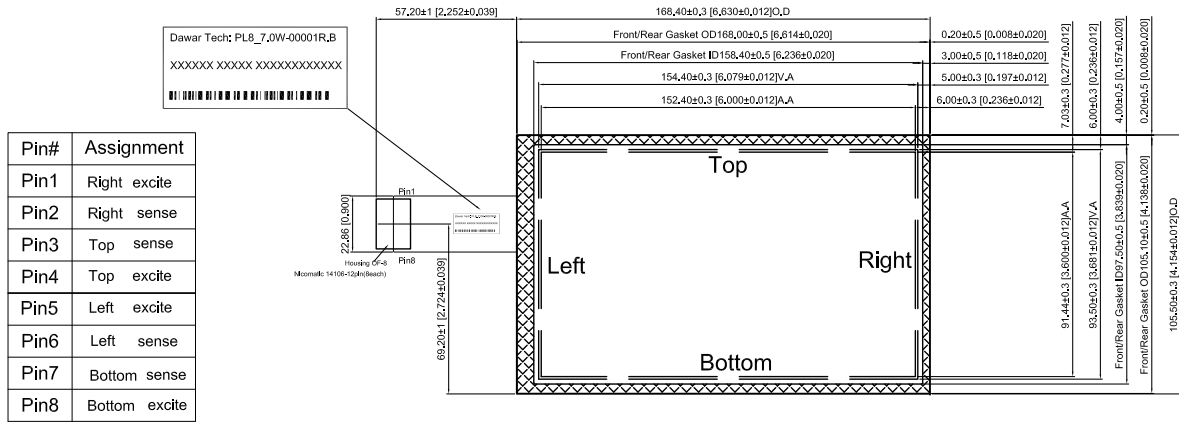

- NOTES:
1. Operation Temperature: -20°C ~ +60°C  
Storage Temperature: -20°C ~ +70°C
  2. Life Time: > 5,000,000 times.
  3. Linearity: ≤ 1.5%.
  4. ITO Film: Anti-glare & Hardening Coating Anti-Newton Ring  
Sheet Resistance: 400±100 Ohm/square;  
ITO Film: Clear- Anti-Newton Ring  
Sheet Resistance: 400±100 Ohm/square
  5. Tall Type : Gold plated FPC
  6. All Tolerance Without Marked: ±0.3
  7. All Materials and Components must be RoHS compliant
  8. No Material is allowed to be larger than the glass size

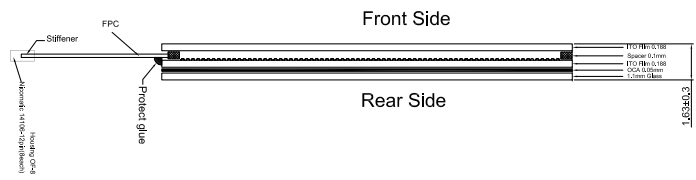

|   |   |                        |                                    |                         |
|---|---|------------------------|------------------------------------|-------------------------|
|  <p>1010 North Lincoln Avenue • Pittsburgh, PA 15233-2302<br/>1.800.366.1904 • 412.322.9900 • Fax: 412.322.9958<br/>e-mail: sales@dawar.com • www.dawar.com</p> <p>THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.</p> | CUSTOMER NAME<br><b>Standard product offering</b>         | UNIT<br><b>mm</b>      | DAWAR PIN<br><b>PL8 7.0W-00001</b> | REV<br><b>B</b>         |
|   | CUSTOMER PIN<br>  | REV<br>                | DRAWN BY<br><b>Jason Liao</b>      | DATE<br><b>08-17-09</b> |
|   | DESCRIPTION<br><b>7.0"W 8-Wire Resistive Touch Screen</b> | SHEET<br><b>1 OF 1</b> | MANUFACTURING NO.                  | REV                     |