



Unit with relay option shown.

FEATURES

- 4 digit local display
- Easy menu-driven programming
- Powered by the 4 mA to 20 mA loop
- No extra wiring needed, inserts between the Hirschmann connector and transmitter body
- Selectable digital filtering
- CE Compliant

APPLICATIONS

- Hydraulic and pneumatic systems
- Pumps and compressors
- Test equipment and systems
- Industrial machinery and machine tools
- HVAC systems
- Power generation
- Water and wastewater
- Stamping and forming presses

ORDERING INFORMATION

1. Order Series 1800-0
2. Indicate display range on order eg. 0-1000 for 4 mA to 20 mA

SERIES 1800

HIGH ACCURACY 4 mA to 20 mA LOOP-POWERED INDICATORS (for series 300, 600, 615, 616 and 800 transmitters)


The Model 1800 Attachable Loop-Powered Digital Indicator can be fitted to NOSHOK pressure and temperature transmitters utilizing a 4 mA to 20 mA output signal and the Hirschmann (DIN EN 175301-803 Form A) connector. It is simply inserted between the transmitter body and the connector. The indicator is programmable to display a range of -1999 to 9999, and it may be tilted for better viewing. Also, there is user selectable digital filtering to improve readability in rapidly varying pressure and temperature applications. All parameters are stored in non-volatile memory so that reprogramming is not necessary in the event of a power failure.

NOSHOK will calibrate the indicator to your transmitter at no additional cost. Simply tell us how you want it set up and it is done.

SPECIFICATIONS

Display	0.4" Liquid Crystal Display
Digits	4, from -1999 to 9999
Accuracy	±0.2 % Full Scale, ±1 digit
Update rate	5 times/second
Filtering	Digital, field selectable .2, .5, 1 or 1.5 seconds, display only
Range	The 4 mA to 20 mA signal from the transmitter can be assigned any display value within the display range. Both scaling points are individually adjustable using the push buttons inside the case
Power Supply	Loop-powered - no additional power supply required. Maximum current rating is 40 mA and voltage drop of 3 Vdc, unregulated
Temperature ranges	Ambient 32 °F to 122 °F (0 °C to 50 °C) Effect is ±0.006 % Full Scale/°F Storage -22 °F to 176 °F (-30 °C to 80 °C)
Electrical	Requires NOSHOK transmitter with 4 mA to 20 mA (2-wire) output and Hirschmann (DIN 43650A) connector
Environmental Protection	IP65, NEMA 4X according to EN 60529/IEC 529
Electromagnetic rating	CE compliant to EMC norm EN 61326:1997/A1:1998 RFI, EMI and ESD protection
Case material	ABS plastic with polycarbonate window
Weight	Approximately 3 oz.
Relay Option	Type: n-switching


Outline Dimensions

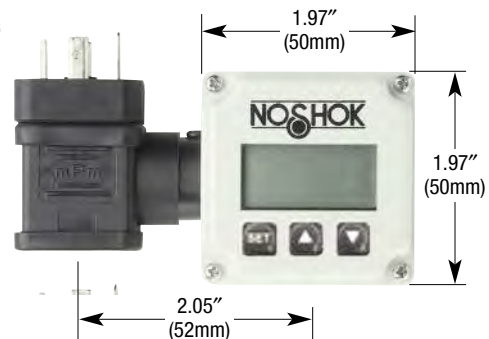



To install, remove the DIN 43650A plug and insert indicator on top of transducer and reinstall the plug. This indicator can be used with NOSHOK and some competitive transmitters with 2-wire 4 mA to 20 mA output, Hirschmann connector with the same pin configuration. (Pin 1 + supply, Pin 2 + output)

To program, first remove the cover from the indicator housing and identify the buttons A, B, and C. These buttons are used to program the indicator to match the pressure range of the transmitter.

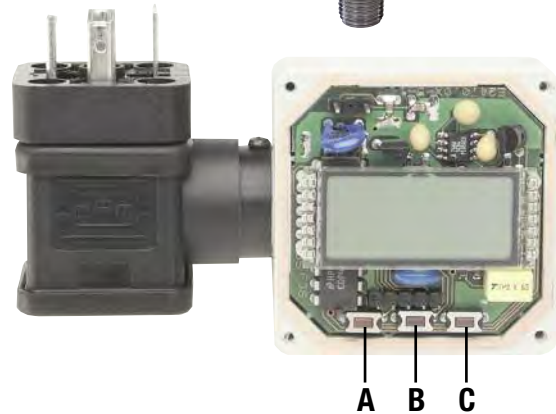

- A → down
- B → program steps
- C → up

1. → Set the decimal point
1 x B:

d	P		
---	---	--	--

→ C/A up or down
2. Set the lower end of the range
2 x B:

A	n	4
---	---	---

→ C/A up or down
3. Set the upper end of the range
3 x B:

A	n	2	0
---	---	---	---

C/A up or down

4. To enable error codes
3 x B:

L	1	
---	---	--

1 x C:

		1
--	--	---

 on
→ 1 x A:

		0
--	--	---

 off
C/A up or down
Errors are shown as F1 for an underrange condition, and F2 for an overrange condition

5. Set digital filtering value
5 x B:

F	I	L	T
---	---	---	---

1 x C:

		0
--	--	---

 0.2 seconds
2 x C:

		1
--	--	---

 0.5 seconds
3 x C:

		2
--	--	---

 1.0 seconds
→ 4 x C:

		3
--	--	---

 1.5 seconds
C/A up or down
6. Return to measurement mode
2 x A