

## DATA SHEET

Form 441-010201

### Description

The voltage output analog module provides a single channel of optically-isolated digital-to-voltage conversion. The "T" module is transformer isolated which eliminates any ground loop problems. The modules are available in uni-polar and bi-polar versions. Modules plug into a Standard analog I/O rack and are secured by a captive screw.

Part Numbers	Description
DA4	0 To +5VDC Output
DA4T	0 To +5VDC Output Isolated
DA5	0 To +10VDC Output
DA6	-5 To +5VDC Output
DA7	-10 To +10VDC Output



### Output Ranges by Module

	DA4	DA4T	DA5	DA6	DA7
Output Voltage	0 to 5 VDC	0 to 5 VDC	0 to 10 VDC	- 5 to + 5 VDC	- 10 to + 10 VDC
Accuracy	± 5 mV	± 5 mV	± 10 mV	± 10 mV	± 20 mV
Power Requirements	20 mA at +15 VDC 10 mA at -15 VDC	35 mA at +15 VDC 35 mA at -15 VDC	20 mA at +15 VDC 10 mA at -15 VDC	20 mA at +15 VDC 10 mA at -15 VDC	20 mA at +15 VDC 10 mA at -15 VDC

Form 441-010201


### Specifications GENERAL

#### Voltage Output Specifications

Output Current DA4, DA5, DA6, DA7 DA4T	70 mA 25 mA
Output Response Time	Full-scale step change in 3 ms
Resolution	12 bits
Isolation Output Input-to-Analog Supply	4,000 Vrms (Transient) 4,000 Vrms
Temperature Storage	0°C to 70°C - 25°C to 85°C

### Connections

VOLTAGE OUTPUT CONNECTION DIAGRAM

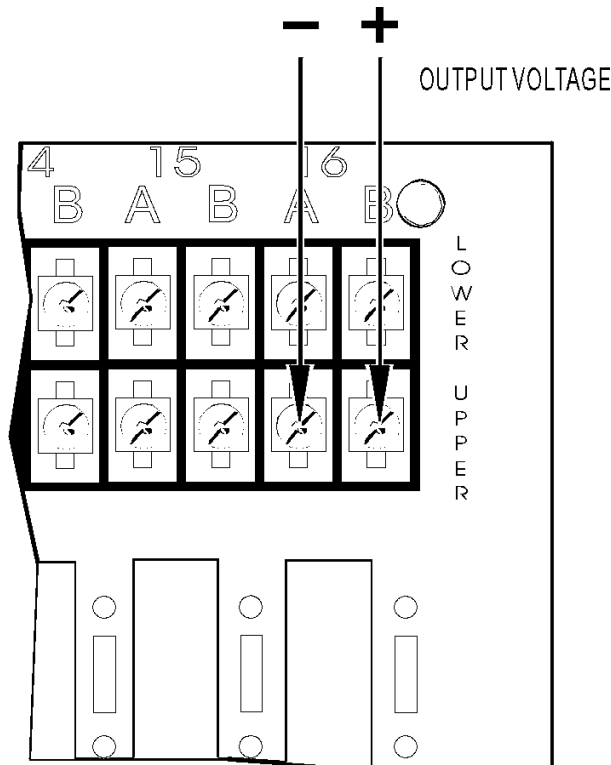

## Products

Opto 22 produces a broad array of reliable, flexible hardware and software products for industrial automation, remote monitoring, enterprise data acquisition, and machine-to-machine (M2M) applications.

### SNAP Ethernet Systems

Based on the Internet Protocol (IP), SNAP Ethernet systems offer flexibility in their network connectivity and in the software applications they work with. The physical network may be a wired Ethernet network, a cellular wireless network, or a modem. A wide variety of software applications can exchange data with SNAP Ethernet systems, including:

- Opto 22's own ioProject™ suite of control and HMI software
- Manufacturing resource planning (MRP), enterprise management, and other enterprise systems
- Human-machine interfaces (HMIs)
- Databases
- Email systems
- OPC client software
- Custom applications
- Modbus/TCP software and hardware.



SNAP Ethernet system hardware consists of controllers and I/O units. Controllers provide central control and data distribution. I/O units provide local connection to sensors and equipment.

### SNAP OEM Systems

Opto 22 SNAP OEM I/O systems are highly configurable, programmable processors intended for OEMs, IT professionals, and others who need to use custom software with Opto 22 SNAP I/O modules.

Linux® applications running on these systems can read and write to analog, simple digital, and serial I/O points on SNAP I/O modules using easily implemented file-based operations. Applications can be developed using several common development tools and environments, including C or C++, Java, and shell scripts.



### M2M Systems

Machine-to-machine (M2M) systems connect your business computer systems to the machines, devices, and environments you want to monitor, control, or collect data from. M2M systems often use wireless cellular communications to link remote facilities to central systems over the Internet, or to provide monitoring and control capability via a cellular phone.

Opto 22's Nvio™ systems include everything you need for M2M—interface and communications hardware, data service plan, and Web portal—in one easy-to-use package. Visit [nvio.opto22.com](http://nvio.opto22.com) for more information.

### Opto 22 Software

Opto 22's ioProject and FactoryFloor® software suites provide full-featured and cost-effective control, HMI, and OPC software to power your Opto 22 hardware. These software applications help you develop control automation solutions, build easy-to-use operator interfaces, and expand your manufacturing systems' connectivity.



### Quality

In delivering hardware and software solutions for worldwide device management and control, Opto 22 retains the highest commitment to quality. We do no statistical testing; each product is made in the U.S.A. and is tested twice before leaving our 160,000 square-foot manufacturing facility in Temecula, California. That's why we can guarantee solid-state relays and optically-isolated I/O modules *for life*.

### Product Support

Opto 22's Product Support Group offers comprehensive technical support for Opto 22 products. The staff of support engineers represents years of training and experience, and can assist with a variety of project implementation questions. Product support is available in English and Spanish from Monday through Friday, 7 a.m. to 5 p.m. PST.

### Opto 22 Web Sites

- [www.opto22.com](http://www.opto22.com)
- [nvio.opto22.com](http://nvio.opto22.com)
- [www.internetio.com](http://www.internetio.com) (live Internet I/O demo)

### Other Resources

- OptoInfo CDs
- Custom integration and development
- Hands-on customer training classes.



### About Opto 22

Opto 22 manufactures and develops hardware and software products for industrial automation, remote monitoring, enterprise data acquisition, and machine-to-machine (M2M) applications. Using standard, commercially available Internet, networking, and computer technologies, Opto 22's input/output and control systems allow customers to monitor, control, and acquire data from all of the mechanical, electrical, and electronic assets that are key to their business operations. Opto 22's products and services support automation end users, OEMs, and information technology and operations personnel.

Founded in 1974 and with over 85 million Opto 22-connected devices deployed worldwide, the company has an established reputation for quality and reliability.