


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F004 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
430	A	RELEASED	JWM	5/15/02	HO	5/17/02	DJC	5/17/02

**FEATURES:**

- One 0-30V Adjustable Output
- One 5V, 500mA Snap-On Output
- One 12V, 500mA Snap-On Output
- Current Limiting LED Indicator
- Adjustable Current Control
- Galvanized Steel Case
- Polycarbonate Front Panel

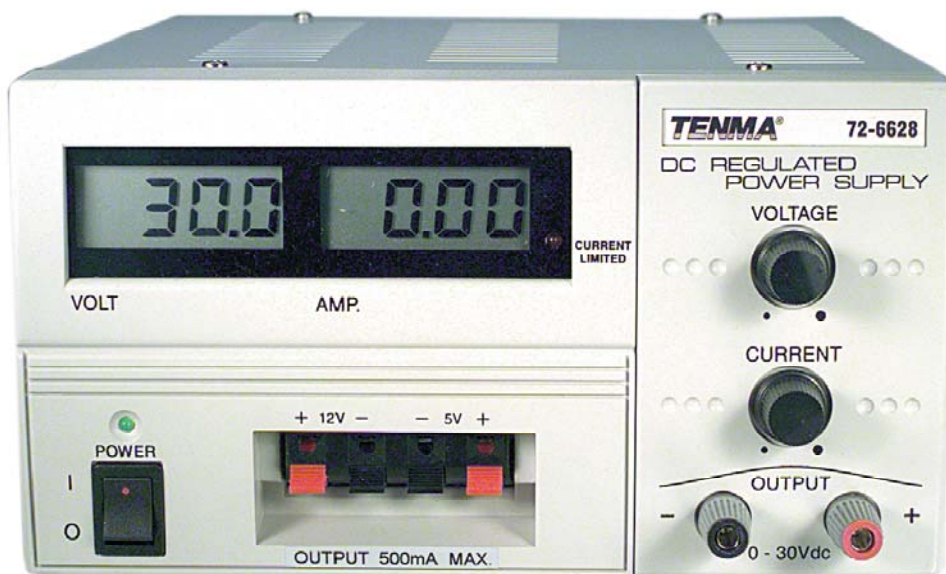

**Specifications**

- Output Voltage: 0 ~ 30VDC
- Output Current: 0 ~ 3A
- Fixed Output: 5VDC/0.5A and 12VDC/0.5A  
(Continuous 1A Maximum)
- Ripple and Noise: 5mVrms
- Line Regulation: 10mV
- Load Regulation: 20mV
- Input Voltage: 120VAC/60Hz
- Volt Meter Type: Digital LCD, 3 digits
- Amp Meter Type: Digital LCD, 3 digits
- Meter Accuracy: ±1% + 2 digits
- Output Terminals: One variable main output screw on type  
Two snap on fixed voltage
- Cooling System: Natural convection
- Overload and Short Circuit Protection
- CE EN61558, EN55014
- Size: 205mm x 115mm x 280mm
- Weight: 5Kg

SPC-F004.DWG

**DISCLAIMER:**  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	5/15/02
CHECKED BY:	DATE:
Hisham Odish	5/17/02
APPROVED BY:	DATE:
Daniel Carey	5/17/02

DRAWING TITLE: <b>Triple Output power Supply</b>			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
<b>A</b>	<b>72-6628</b>	<b>50N1382.dwg</b>	<b>A</b>
SCALE: NTS	U.O.M.: Millimeters	SHEET: 1 OF 1	