




REVISIONS

DCG. NO. SPC-F004 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1699		Released	JWM	7/24/08	JN	03/04/08	JN	03/04/08

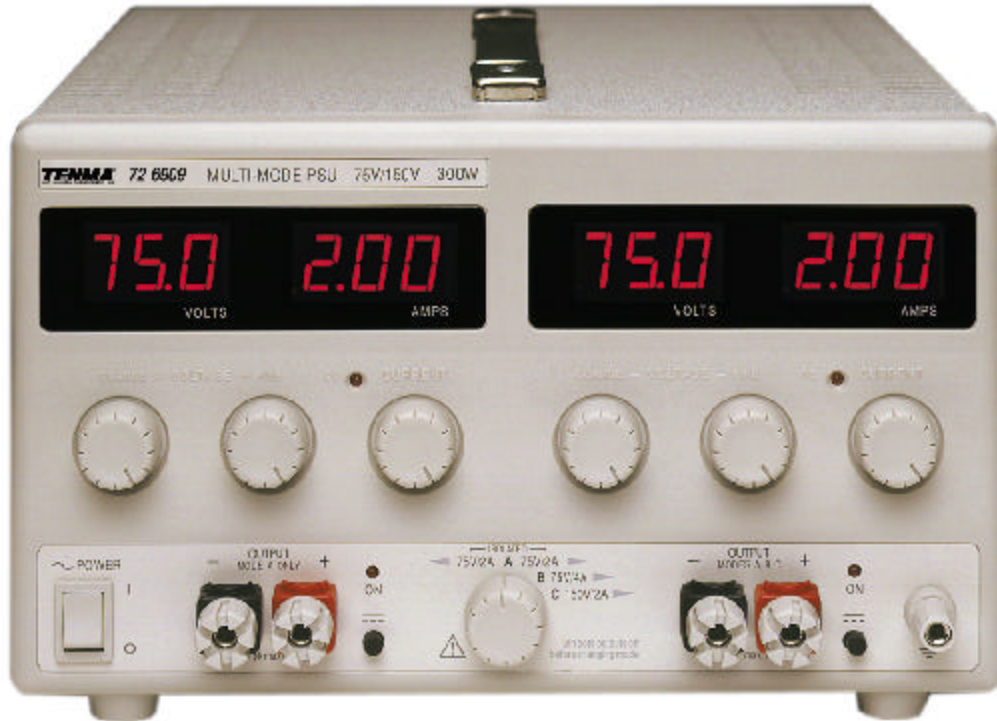

72-6909 is a dual output 300 watt PSU with Multi-Mode capability. This enables it to operate as a dual power supply with two independent and isolated outputs, or as a single power supply of double the power. As a dual, each output provides 0 to 75V at 0 to 2A (mode A). As a single the output can be selected as either 0 to 75V at 0 to 4A (mode B) or 0 to 150V at 0 to 2A (mode C). In single modes, the unused half of the unit becomes completely inoperative and its displays are blanked.

SPC-F004.DWG

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:			
	Jeff McVicker	7/24/08	DC Power Supply, Dual Output			
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	Jason Nash	03/04/08	A	72-6909	01H9897.dwg	
	APPROVED BY:	DATE:	SCALE:	U.O.M.:	SHEET:	
	Jason Nash	03/04/08	NTS	Millimeters	1 OF 2	

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

MAIN OUTPUTS

- Operating Mode: Constant voltage or constant current with automatic crossover and indication.
- Voltage Setting: By coarse and fine controls.
- Current Setting: By single logarithmic control.
- Load regulation: <0.01 % of max. O/P for a 90 % load change.
- Line regulation: <0.01 % of max. O/P for a 10 % line voltage change.
- Output impedance: Typically <5m. in constant voltage mode. Typically >50k. in constant current mode.
- Ripple & Noise
(20MHz bandwidth): Typically <2mV rms, <10mV pk-pk, (CV mode).
- Transient Response: <200µs to within 50mV of set level for 90 % load change.
- Temp. Coefficient: Typically <100ppm/°C.
- Output Protection: Outputs will withstand forward voltages up to or 85V/170V
Over-voltage trip operates above these levels. Reverse protection by diode clamp for currents up to 3A.
- Status Indication: Output ON lamps. Constant current mode lamps.
- Output Switch: Electronic. Preset voltage/current displayed with output off.
- Output Terminals: 4mm terminals on 19mm (0.75") pitch.

METERS (main outputs)

- Meter Types: Separate 3 digit meter for current with 14mm (0.56") LED displays. Reading rate 4/sec.
- Meter Resolutions: 100mV, 10mA.
- Meter Accuracies: Voltage 0.3 % ±1 digit. Current 0.6 % ±1 digit.

LOGIC OUTPUT(EXT345T)

- Voltage: 5V or 3.3V, selectable by front panel switch.
- Voltage accuracy: ±2 %
- Current limit: 5A minimum.
- Load regulation: <0.5 % for a 90 % load change.
- Line regulation: <0.1 % for 10 % line voltage change.
- Ripple & Noise
(20MHz bandwidth): Typically <2mV rms, <10mV pk-pk, (CV mode).
- Output Protection: Output will withstand forward voltage above the rate output.
Diode clamp reverse protection for current to 3A.
- Output Terminals: 4mm "binding post" terminals suitable for plugs or wires.
with fully "touch proof" construction.
- Status Indication: Current limit lamp.

POWER

- AC Input: 110V to 240V ±10 %, 50/60Hz.

SIZE AND WEIGHT

- Size: 140x160x320mm (single);
260x160x320mm (dual/triple).
- Weight: 4.4kg

ENVIRONMENTAL

- Operating Range: +5°C to +40°C, 20 % to 80 % RH.
- Storage Range: -40°C to + 70°C.
- Environmental: Indoor use at altitudes to 2000m, Pollution Degree 2.
- Safety: Complies with EN61010-1.
- EMC: Complies with EN61326.

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. SPC-F004.DWG	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	A	72-6909	01H9897.dwg	
DWG. NO. SPC-F004 * Effective: 7/8/02 * DCP No: 1398	SCALE: NTS	U.O.M.: Millimeters	SHEET: 2	OF 2