

### Description


- For 5mm x 20mm fuses
- With snap on covers
  - BK/HTC-140M (Natural Cover)
  - BK/HTC-150M (Transparent Cover)
- Tight cluster mounting
- Clips made of tin-lead plated spring-bronze
- Available only in bulk
- High temperature thermoplastic meets:
  - UL 94-VO
  - Glow wire test: 960°C per IEC 695-2-1

### Environmental Data


- Maximum suitable temperature: 110°C

### Ordering

- Specify product code and packaging code

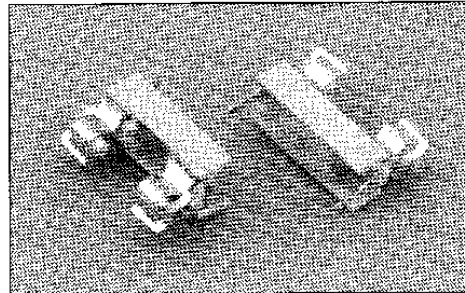


### Mounting Holes

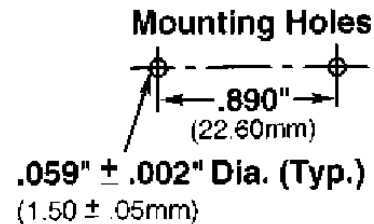

SPECIFICATIONS		
Product Code	Voltage Rating AC	Current Rating AC
HTC-15M	250V	6.3A

### Dimensions BK/HTC-15M


Drawing Not to Scale

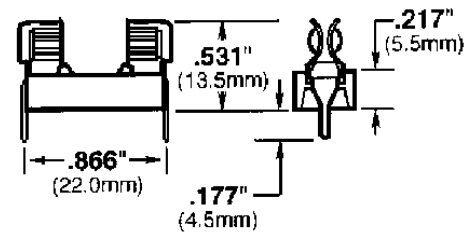

### Dimensions

#### BK/HTC-140M

Drawing Not to Scale

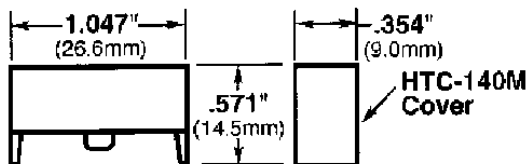

Component	Material
Clip	Spring-Bronze, Bright Tin-Lead Plate
Body	Thermoplastic

PACKAGING CODE	
Packaging Code	Description
BK	100 pieces of fuseblocks packed into a cardboard shelf package