

6.3x32mm / No. 313

Replaces No. 343

GLASS BODY Slo-Blo® Type Fuse



A standard for cost-effective reliability and performance in circuit protection, the 3AG fuse satisfies a broad range of application requirements.

ELECTRICAL CHARACTERISTICS:

% of Ampere Rating	Opening Time
110%	4 hours, Minimum
135%	1 hour, Maximum
200%	5 seconds, Minimum

AGENCY APPROVALS: Listed by Underwriters Laboratories and Certified by CSA through 8 amperes. 313 000 Series approved by MITI from 1 through 5 amperes.

AGENCY FILE NUMBERS: UL E10480, CSA LR 29862. made by Littelfuse

PATENTED

ORDERING INFORMATION:

Cartridge Catalog Number	Ampere Rating	Voltage Rating	Nominal Resistance Cold Ohms	Nominal Melting I ² t A ² Sec.	Amp Code	Breaking Capacity
313.062	1/16	250	91.0	0.0210	0062	35A / 250 V AC
313.100	1/10	250	33.3	0.0850	0100	
313.125	1/8	250	22.3	0.152	0125	
313.150	15/100	250	15.3	0.270	0150	
313.175	.175	250	8.60	0.177	0175	
313.187	3/16	250	7.95	0.230	0187	
313.200	2/10	250	6.54	0.270	0200	
313.250	1/4	250	4.27	0.385	0250	
313.300	3/10	250	3.11	0.730	0300	
313.375	3/8	250	2.08	1.23	0375	
313.400	4/10	250	1.86	1.35	0400	
313.500*	1/2	250	1.25	2.55	0500	
313.600	6/10	250	0.914	4.00	0600	10,000 A / 125 V AC
313.700	7/10	250	0.695	5.90	0700	
313.750	3/4	250	0.617	7.16	0750	
313.800	8/10	250	0.550	8.00	0800	
313.001*	1	250	0.375	14.0	1100	
313.01.2	1 ¹ / ₁₀	250	0.276	21.5	1120	
313.1.25	1 ¹ / ₄	250	0.258	24.0	1125	
313.01.5	1 ¹ / ₂	250	0.190	38.0	1150	
313.01.6	1 ¹ / ₁₀	250	0.170	49.6	1160	
313.01.8	1 ¹ / ₁₀	250	0.140	58.0	1180	
313.002*	2	250	0.116	77.0	1200	100A / 250 V AC
313.2.25	2 ¹ / ₄	250	0.0960	121.0	1225	
313.02.5	2 ¹ / ₂	250	0.0805	130.0	1250	
313.02.8	2 ¹ / ₁₀	250	0.0670	170.0	1280	
313.003	3	250	0.0588	200.0	1300	
313.03.2	3 ¹ / ₁₀	250	0.0525	209.0	1320	
313.004	4	250	0.0308	76.1	1400	
313.005	5	250	0.0212	140.0	1500	
313.6.25	6 ¹ / ₄	250	0.0152	242.0	1625	
313.6.30	6.30	250	0.0152	242.0	1630	
313.007	7	250	0.0127	347.0	1700	200A / 250 V AC
313.008	8	250	0.0110	445.0	1800	


packaging: 000 bulk (100 pcs.)

Specifications are subject to change without notice


Further application infos see Fuseology: <http://www.wickmann.com/download/fuseology.pdf>



313 000 Series



Average Time Current Curves

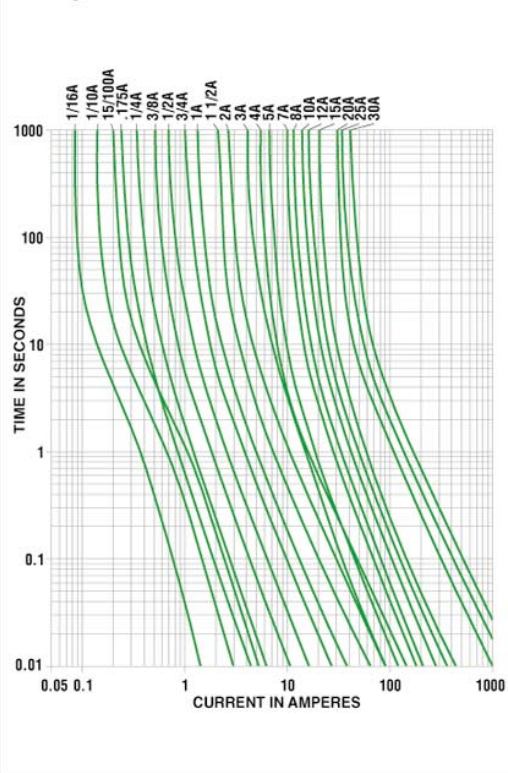

Order Information	Qty.	Order-Number	Series	Amp Code	Packaging
				313	