

# Axial Lead and Cartridge Fuses

Designed to IEC Standard

## 5 x 20 mm Time Lag Fuse (Slo-Blo® Fuse) 219A Series



- Designed to International (IEC) Standards for use globally.
- Meets the IEC 60127-2, Sheet 6 specification for Time Lag Fuses.
- Available in Cartridge and Axial Lead Format.
- Available in ratings of 1.0 to 6.3 amperes.
- Enhanced Breaking Capacity, High I<sup>2</sup>t

### ELECTRICAL CHARACTERISTICS:

% of Ampere Rating	Opening Time
150%	60 minutes, <b>Minimum</b>
210%	2 minutes, <b>Maximum</b>
275%	0.6 sec., <b>Min.</b> ; 10 sec. <b>Max</b>
400%	.15 sec., <b>Min.</b> ; 3 sec. <b>Max</b>
1000%	0.02 sec., <b>Min.</b> ; 0.3 sec. <b>Max.</b>



**AGENCY APPROVALS:** Sheet 6 IEC 60127: SEMKO, BSI, VDE, METI, CCC, K Mark approved. Recognized under the components program of Underwriters Laboratories and recognized by CSA.

**INTERRUPTING RATINGS:** 150 amperes @ 250VAC, unity power factor

**PACKAGING:** For Axial Leads add packaging suffix XE.

### ORDERING INFORMATION:

Catalog Number	Ampere Rating	Nominal Voltage Rating	Nominal Resistance Cold Ohms	Nominal Melting I <sup>2</sup> t A <sup>2</sup> Sec
0219.125A	.125	250	4.41	0.150
0219.160A	.160	250	2.44	0.225
0219.200A	.200	250	1.60	0.350
0219.250A	.250	250	1.05	0.555
0219.315A	.315	250	0.848	1.14
0219.400A	.400	250	0.535	1.35
0219.500A	.500	250	0.370	2.90
0219.630A	.630	250	0.275	4.80
0219.800A	.800	250	0.163	1.99
0219 001.A	1	250	0.117	19.2
0219 1.25A	1.25	250	0.082	27.2
0219 01.6A	1.6	250	0.055	44.2
0219 002.A	2	250	0.046	92.7
0219 02.5A	2.5	250	0.031	138.0
0219 3.15A	3.15	250	0.023	202.1
0219 004.A	4	250	0.016	330.0
0219 005.A	5	250	0.012	544.0
0219 06.3A	6.3	250	0.011	1093.0

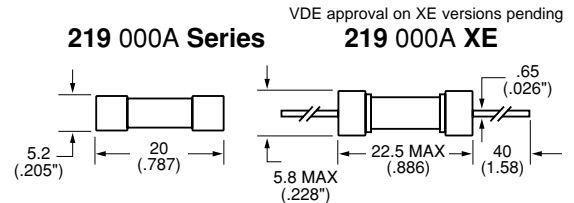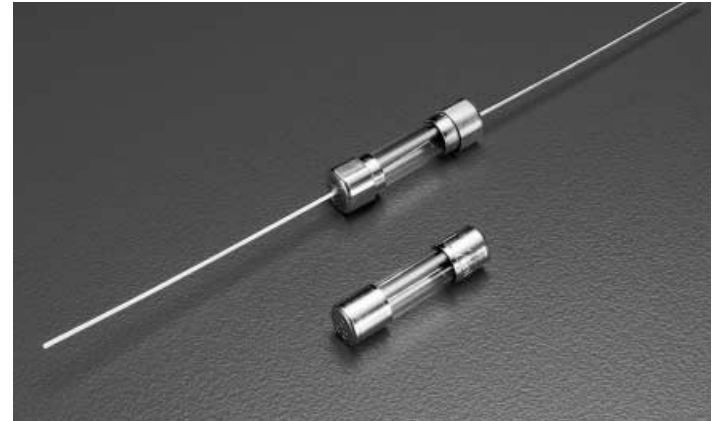

### Average Time Current Curves

