



Catalog Numbers, Ratings – aM (Optional Blown-Fuse Indicator)

SIZE (mm x mm)	RATED In CURRENT (A)	RATED VOLTAGE	CATALOG NUMBER		INTERRUPTING RATING (A)	STANDARD PACK/CTN.
			w/o Indicator	w/Indicator		
15519-G 8 x 31	1	400V	15511-G	-	20,000	10/100
	2		15513-G	-		
	4		15519-G	-		
	6		15523-G	-		
	8		15527-G	-		
	10		15531-G	-		
16535-G 10 X 38	0.16	500V	16503-G	-	120,000	10/100
	0.25		16507-G	-		
	0.5		16509-G	-		
	1		16511-G	16711-G		
	2		16513-G	16713-G		
	4		16519-G	16719-G		
	6		16523-G	16723-G		
	8		16527-G	16727-G		
	10		16531-G	16731-G		
	12	16533-G	16733-G			
	16	16535-G	16735-G			
	20	16537-G	16737-G			
	25	16539-G	16739-G			
	32	16543-G	16739-G			
	17535-G 14 X 51	0.25	690V	17507-G	-	
0.5		17509-G		-		
1		17511-G		17711-G		
2		17513-G		17713-G		
4		17519-G		17719-G		
6		17523-G		17723-G		
8		17527-G		17727-G		
10		17531-G		17731-G		
12		17533-G		17733-G		
16		17535-G		17735-G		
20		17537-G	17737-G			
25		17539-G	17739-G			
32		500V	17543-G	17743-G	120,000	
40		17547-G	17747-G			
45		17549-G	17749-G			
50	400V	17551-G	17751-G			
18555-G 22 x 58	4	690V	18519-G	18719-G	80,000	10/50
	6		18523-G	18723-G		
	8		18527-G	18727-G		
	10		18531-G	18731-G		
	12		18533-G	18733-G		
	16		18535-G	18735-G		
	20		18537-G	18737-G		
	25		18539-G	18739-G		
	32		18543-G	18743-G		
	40		18547-G	18747-G		
	50	18551-G	18751-G			
	63	18555-G	18755-G			
	80	18559-G	18759-G			
	100	500V	18563-G	18763-G	120,000	
	125	400V	18565-G	18765-G		

Blown-Fuse Indicator

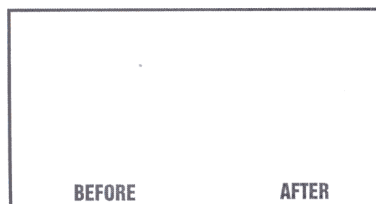

Dimensions



FUSE SIZE	A	B	C
8 x 31	8.5	31.5	6.3
10 x 38	10.3	38	10.5
14 x 51	14.3	51	13.8
22 x 58	22.2	58	16.2