

DK/EK-Series




The DK/EK-Series toggle switches are quick-make and quick-break type switches, suitable for high amperage AC/DC motor control. These heavy-duty switches are supplied with plated brass toggles and bushings in a phenolic base.

Specifications

- Certifications*: UL, CSA
- Dielectric Strength: 1,000 V (minimum)
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Phenolic
- Actuator Material: Brass/Nickel Plate
- Bezel Material: Brass/Nickel Plate

* Due to ongoing technological advances, consult factory for certification specifics.

Dimensional Specifications: in. [mm]

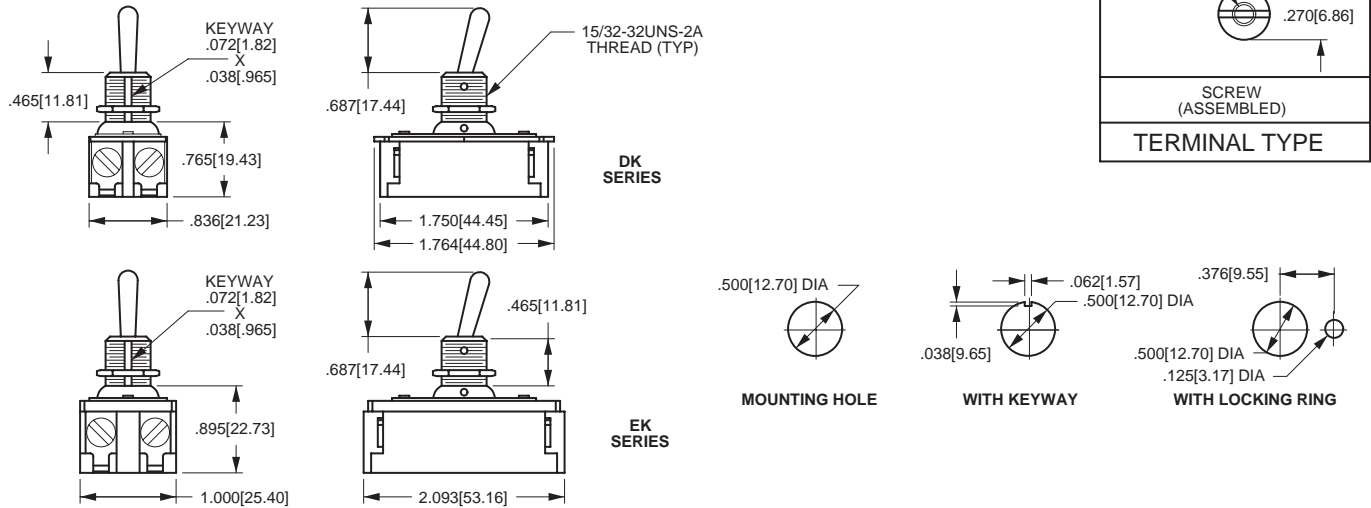

DK 28 4 - 73

SERIES/CIRCUIT

RATING

TERMINATION

TOGGLE STYLE

DA ON-OFF SINGLE POLE
DK ON-OFF DOUBLE POLE

28 8A 250V
16A 125V
1HP 125-250V

4 SCREW TERMINAL

TOGGLE BUSHING SUFFIX
LENGTH LENGTH NO.

BALL	.500	.343	32
BAT	.687	.343	72
	.687	.465	73

EK 20 4 - 73

SERIES/CIRCUIT

RATING

TERMINATION

TOGGLE STYLE

EA ON-OFF SINGLE POLE
EK ON-OFF DOUBLE POLE

20 10A 250V
20A 125V
1 1/2HP 125-250V

4 SCREW TERMINAL

TOGGLE BUSHING SUFFIX
LENGTH LENGTH NO.

BALL	.500	.343	32
BAT	.687	.343	72
	.687	.465	73

NOTES:
Shading indicates standard configurations.