

Taiwan Semiconductor Co., Ltd. Product Discontinuing Notification

1. PDN No.:	<i>QPDN08007</i>
2. To:	<i>Sales</i>
3. Issued by:	Ray Wu
4. Issue date:	2008/03/01
5. Affected product/ product family:	6. Recommended replacement:
Package: SMA Product : SML47xx	Package : SMA Product : 1SMA47xx
7. Reason for discontinuing:	
In order to improve production efficiency, the low demand product of SML47xx series product was decided discontinuous. The operation resource will transfer to other products.	
8. Last time buy/ order entry:	May 01 2008
9. Last shipment date:	Aug 01 2008
10. Please let us know if you have any question/ comment:	
11. Customer feedback required latest: (should we receive no feedback, the change will be deemed as accepted!)	2008/09/01
12. Approved by:	L.C.Kao

(QWS58287)

(your answer pls send to below mentioned address)

>>> >> fill in the sales location address like: Name , Taiwan Semiconductor, street, zip code, city, country, Tel.:, Fax.:, e-mail


1SMA4737 - 1SMA200Z

1.25 Watts Surface Mount Silicon Zener Diode
SMA/DO-214AC



Features

- ✧ For surface mounted applications in order to optimize board space
- ✧ Low profile package
- ✧ Built-in strain relief
- ✧ Glass passivated junction
- ✧ Low inductance
- ✧ Typical I_R less than 5.0uA above 7.5V
- ✧ High temperature soldering guaranteed: 260°C / 10 seconds at terminals
- ✧ Plastic package has Underwriters Laboratory Flammability Classification 94V-0

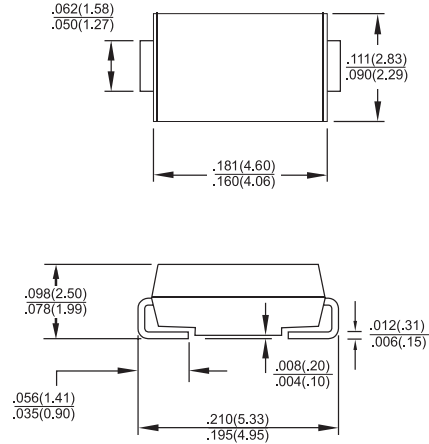

Dimensions in inches and (millimeters)

Mechanical Data

- ✧ Case: Molded plastic over passivated junction
- ✧ Terminals: Pure tin plated lead free, solderable per MIL-STD-750, Method 2025
- ✧ Polarity: Color Band denotes positive end (cathode)
- ✧ Standard packaging: 12mm tape (EIA-481)
- ✧ Weight: 0.002 ounces, 0.064 gram

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Type Number	Symbol	Value	Units
Power Dissipation, $R_{thJA} < 30 \text{ K/W}$, $T_{amb} = 60^\circ\text{C}$	P_D	3.0	Watts
Power Dissipation, $R_{thJA} < 100 \text{ K/W}$, $T_{amb} = 25^\circ\text{C}$	P_D	1.25	Watts
Non Repetitive Peak Surge Power Dissipation(Note 1)	P_{ZSM}	60	Watts
Non Repetitive Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	10.0	Amps
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to + 150	°C

Notes: 1. Non Repetitive Peak surge P_D Test Conditions: $t_p = 100\mu\text{s}$ sq. pulse, $T_j = 25^\circ\text{C}$ prior to surge.

ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted) VF=1.2V max, IF=200mA for all types.

Device (Note 1)	Device Marking Code	Nominal Zener Voltage V _Z @ I _{ZT} Voltage (Notes 2 & 3)	Test Current I _{ZT} mA	Maximum Zener Impedance (Note 4)			Leakage Current		Surge Current @ T _A = 25°C I _r - mA (Note 5)
				Z _{ZT} @ I _{ZT} Ohms	Z _{ZK} @ I _{ZK}		I _R @ V _R		
					Ohms	mA	uA Max	Volts	
1SMA4737	737A	7.5	100	3	700	0.25	5.0	5.0	607
1SMA4738	738A	8.2	100	3.5	700	0.25	5.0	6.0	555
1SMA4739	739A	9.1	50	4	700	0.25	5.0	7.0	500
1SMA4740	740A	10	50	4	700	0.25	5.0	7.5	455
1SMA4741	741A	11	23	8	700	0.25	5.0	8.4	414
1SMA4742	742A	12	21	9	700	0.25	5.0	9.1	380
1SMA4743	743A	13	19	10	700	0.25	5.0	9.9	344
1SMA4744	744A	15	17	14	700	0.25	5.0	11.4	304
1SMA4745	745A	16	15.5	16	700	0.25	5.0	12.2	285
1SMA4746	746A	18	14.0	20	750	0.25	5.0	13.7	250
1SMA4747	747A	20	12.5	22	750	0.25	5.0	15.2	225
1SMA4748	748A	22	11.5	23	750	0.25	5.0	16.7	205
1SMA4749	749A	24	10.5	25	750	0.25	5.0	18.2	190
1SMA4750	750A	27	9.5	35	750	0.25	5.0	20.6	170
1SMA4751	751A	30	8.5	40	1000	0.25	5.0	22.8	150
1SMA4752	752A	33	7.5	45	1000	0.25	5.0	25.1	135
1SMA4753	753A	36	7.0	50	1000	0.25	5.0	27.4	125
1SMA4754	754A	39	6.5	60	1000	0.25	5.0	29.7	115
1SMA4755	755A	43	6.0	70	1500	0.25	5.0	32.7	110
1SMA4756	756A	47	5.5	80	1500	0.25	5.0	35.8	95
1SMA4757	757A	51	5.0	95	1500	0.25	5.0	38.8	90
1SMA4758	758A	56	4.5	110	2000	0.25	5.0	42.6	80
1SMA4759	759A	62	4.0	125	2000	0.25	5.0	47.1	70
1SMA4760	760A	68	3.7	150	2000	0.25	5.0	51.7	65
1SMA4761	761A	75	3.3	175	2000	0.25	5.0	56.0	60
1SMA4762	762A	82	3.0	200	3000	0.25	5.0	62.2	55
1SMA4763	763A	91	2.8	250	3000	0.25	5.0	69.2	50
1SMA4764	764A	100	2.5	350	3000	0.25	5.0	76.0	45
1SMA110Z	110A	110	2.3	450	4000	0.25	5.0	83.6	-
1SMA120Z	120A	120	2.0	550	4500	0.25	5.0	91.2	-
1SMA130Z	130A	130	1.9	700	5000	0.25	5.0	98.8	-
1SMA150Z	150A	150	1.7	1000	6000	0.25	5.0	114.0	-
1SMA160Z	160A	160	1.6	1100	6500	0.25	5.0	121.6	-
1SMA180Z	180A	180	1.4	1200	7000	0.25	5.0	136.8	-
1SMA200Z	200A	200	1.2	1500	8000	0.25	5.0	152.0	-

Notes: 1: Tolerance and Type Number Designation. The type numbers listed have a standard tolerance on the nominal zener voltage of ±5%.

2. Specials Available Include:

- A. Nominal zener voltages between the voltages shown and tighter voltage tolerances.
- B. Matched sets.

3. Zener Voltage (V_Z) Measurement. Guarantees the zener voltage when measured at 90 seconds while maintaining the lead temperature (T_L) at 30°C± 1°C, from the diode body.

4. Zener Impedance (Z_Z) Derivation. The zener impedance is derived from the 60 cycle ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK}.

5. Surge Current (I_r) Non-Repetitive. The rating listed in the electrical characteristics table is maximum peak, non-repetitive reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current, I_{ZT}, per JEDEC registration; however, actual device capability is as described in Figure 10.

RATINGS AND CHARACTERISTIC CURVES (1SMA4737 THRU 1SMA200Z)

FIG.1- POWER TEMPERATURE DERATING CURVE

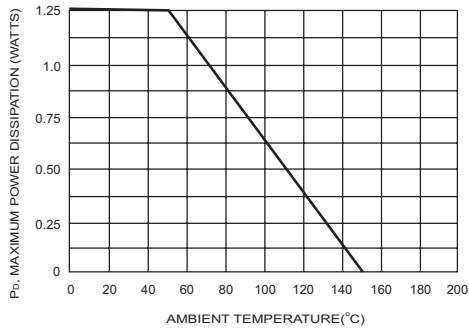


FIG.2- TYPICAL FORWARD CHARACTERISTICS

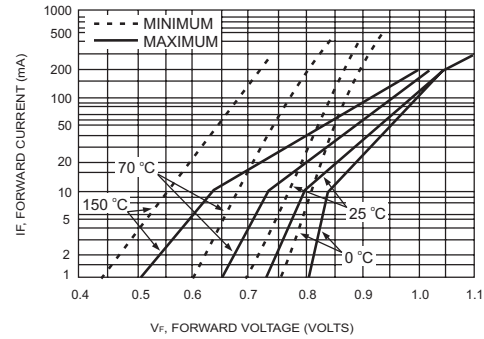


FIG.3- EFFECT OF ZENER CURRENT ON ZENER IMPEDANCE

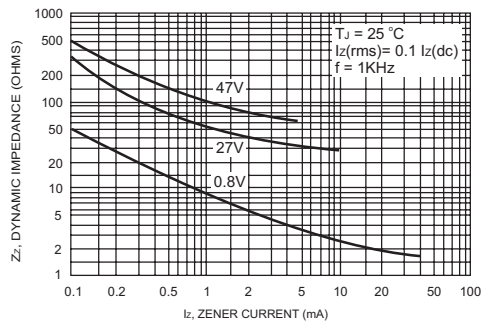


FIG.5- TYPICAL LEAKAGE CURRENT


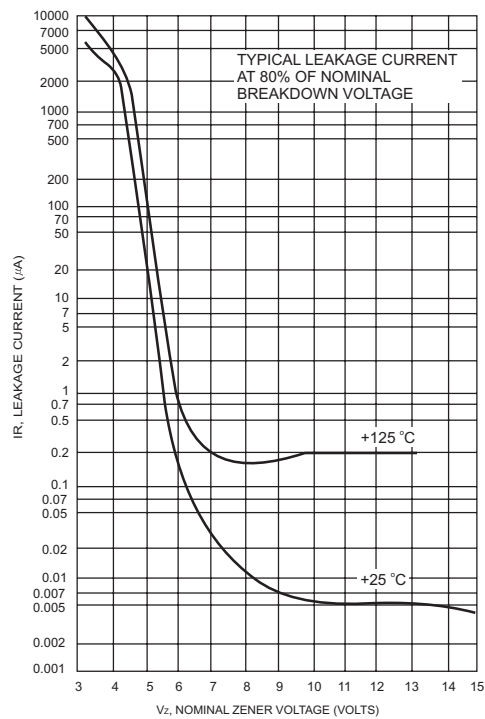


FIG.4- EFFECT OF ZENER VOLTAGE ON ZENER IMPEDANCE

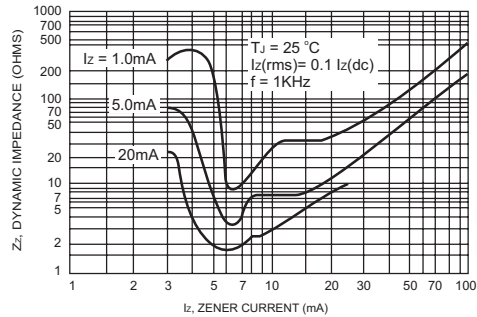

RATINGS AND CHARACTERISTIC CURVES (1SMA4737 THRU 1SMA200Z)

FIG.6- TYPICAL CAPACITANCE versus V_z

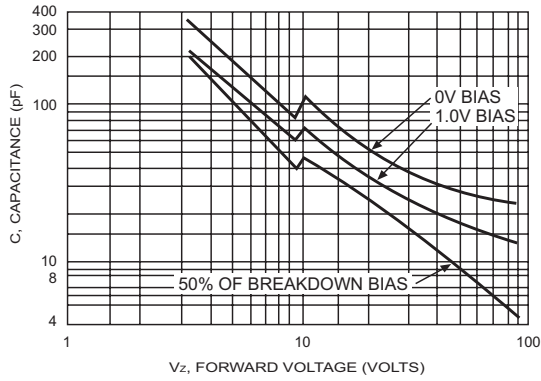


FIG.7- TEMPERATURE COEFFICIENTS

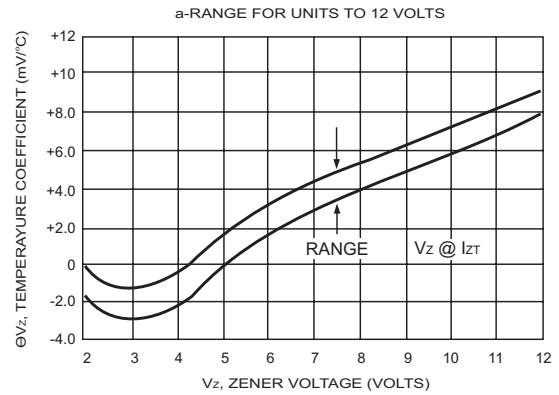


FIG.8- TEMPERATURE COEFFICIENTS

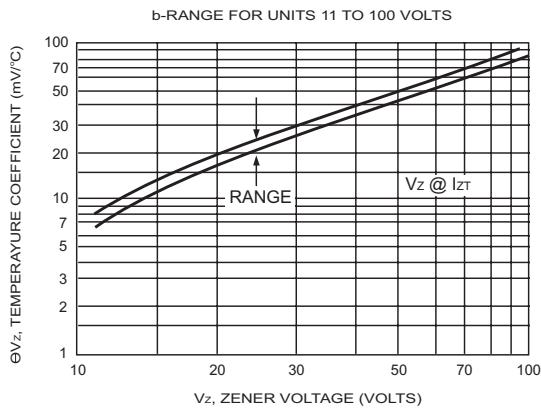


FIG.9- EFFECT OF ZENER CURRENT

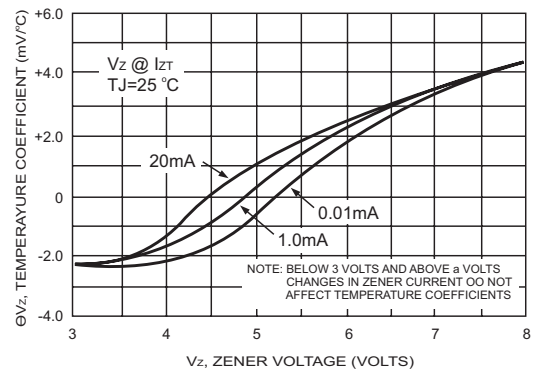


FIG.10- MAXIMUM SURGE POWER

