

N-Channel 80-V and 90-V (D-S) MOSFETS

PRODUCT SUMMARY				
Part Number	$V_{(BR)DSS}$ Min (V)	$r_{DS(on)}$ Max (Ω)	$V_{GS(th)}$ (V)	I_D (A)
2N6661	90	4 @ $V_{GS} = 10$ V	0.8 to 2	0.9
VN88AFD	80	4 @ $V_{GS} = 10$ V	0.8 to 2.5	1.29

FEATURES

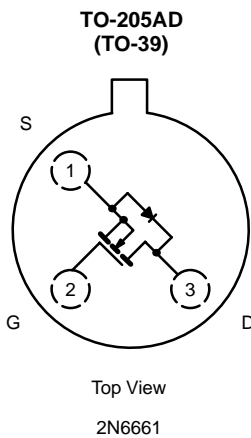
- Low On-Resistance: 3.6 Ω
- Low Threshold: 1.6 V
- Low Input Capacitance: 35 pF
- Fast Switching Speed: 6 ns
- Low Input and Output Leakage

BENEFITS

- Low Offset Voltage
- Low-Voltage Operation
- Easily Driven Without Buffer
- High-Speed Circuits
- Low Error Voltage

APPLICATIONS

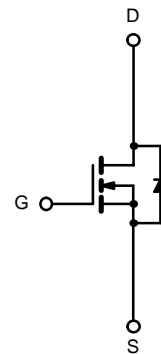
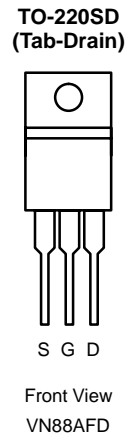
- Direct Logic-Level Interface: TTL/CMOS
- Drivers: Relays, Solenoids, Lamps, Hammers, Displays, Memories, Transistors, etc.
- Battery Operated Systems
- Solid-State Relays



Device Marking
Side View

2N6661
"S" flxxyy

"S" = Siliconix Logo
f = Factory Code
ll = Lot Traceability
xyyy = Date Code



Device Marking
Front View

VN88AFD
"S" xxyy

"S" = Siliconix Logo
xyyy = Date Code

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter	Symbol	2N6661	VN88AFD	Unit
Drain-Source Voltage	V_{DS}	90	80	V
Gate-Source Voltage	V_{GS}	± 20	± 30	
Continuous Drain Current ($T_J = 150^\circ\text{C}$)	I_D	$T_C = 25^\circ\text{C}$	0.9	A
		$T_C = 100^\circ\text{C}$	0.7	
Pulsed Drain Current ^a	I_{DM}	± 3	± 3	
Power Dissipation	P_D	$T_C = 25^\circ\text{C}$	6.25	W
		$T_C = 100^\circ\text{C}$	2.5	
Thermal Resistance, Junction-to-Ambient ^b	R_{thJA}	170		$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	R_{thJC}		8.3	
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 150		$^\circ\text{C}$

Notes

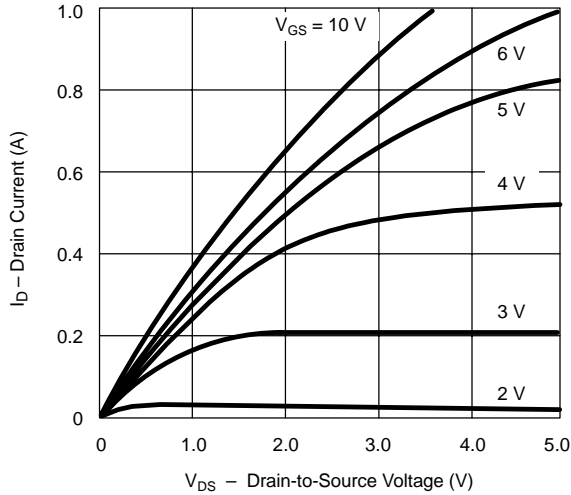
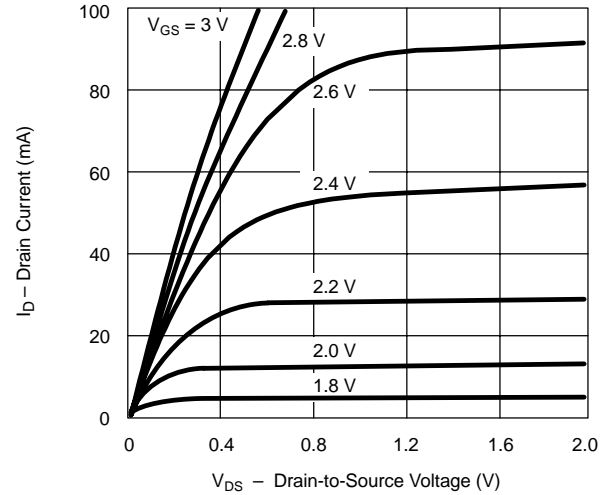
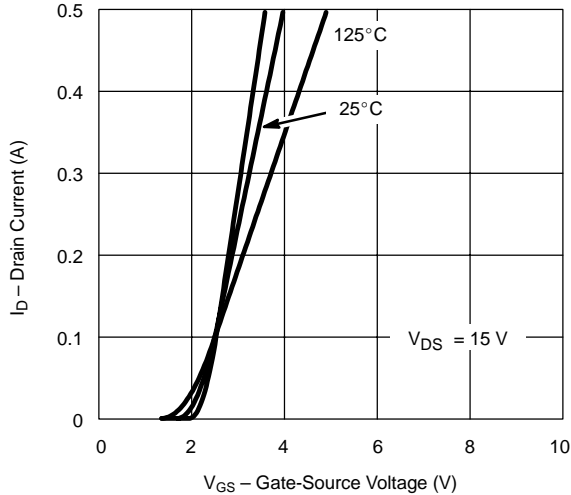
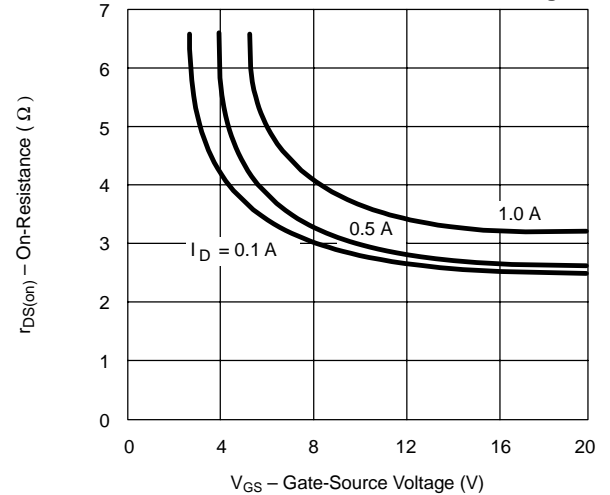
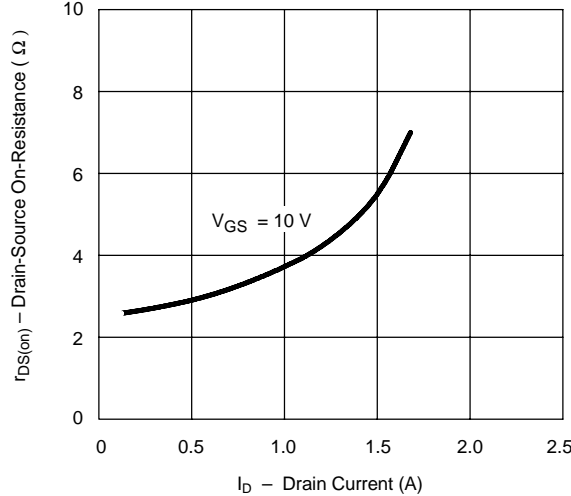
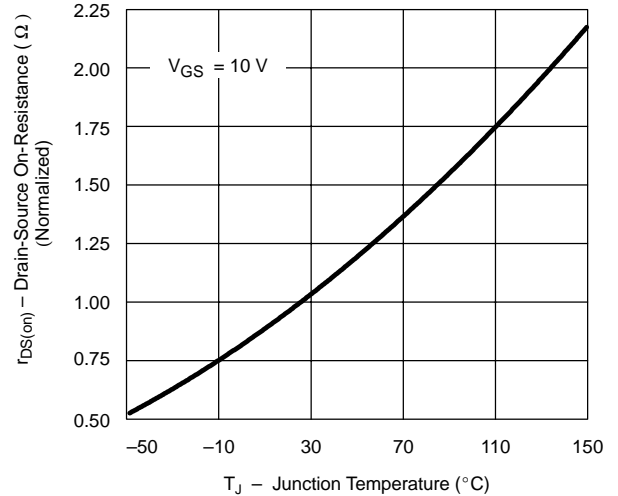
- Pulse width limited by maximum junction temperature.
- This parameter not registered with JEDEC.

SPECIFICATIONS (T _A = 25 °C UNLESS OTHERWISE NOTED)								
Parameter	Symbol	Test Conditions	Typ ^a	Limits				Unit
				2N6661		VN88AFD		
				Min	Max	Min	Max	
Static								
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = 10 μA	125	90		80		V
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 1 mA	1.6	0.8	2	0.8	2.5	
		T _J = -55 °C	1.8					
		T _J = 125 °C	1.3					
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±15 V			±100		±100	nA
		T _J = 125 °C			±500		±500	
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 90 V, V _{GS} = 0 V			10			μA
		V _{DS} = 80 V, V _{GS} = 0 V					10	
		V _{DS} = 0.8 × V _{(BR)DSS} , V _{GS} = 0 V					1	
		T _J = 125 °C			500		500	
On-State Drain Current ^b	I _{D(on)}	V _{DS} = 15 V, V _{GS} = 10 V	1.8	1.5				A
		V _{DS} = 10 V, V _{GS} = 10 V	1.8			1.5		
Drain-Source On-Resistance ^b	r _{DS(on)}	V _{GS} = 5 V, I _D = 0.3 A	3.8		5.3		5.6	Ω
		V _{GS} = 10 V, I _D = 1 A	3.6		4		4	
		T _J = 125 °C ^d	6.7		9		8	
Forward Transconductance ^b	g _{fs}	V _{DS} = 10 V, I _D = 0.5 A	350	170		170		mS
Diode Forward Voltage	V _{SD}	I _S = 0.86 A, V _{GS} = 0 V	0.9					V
Dynamic								
Input Capacitance	C _{iss}	V _{DS} = 24 V, V _{GS} = 0 V f = 1 MHz	35		50		50	pF
Output Capacitance	C _{oss}		15		40		40	
Reverse Transfer Capacitance	C _{rss}		2		10		10	
Drain-Source Capacitance	C _{ds}		30		40			
Switching^c								
Turn-On Time	t _{ON}	V _{DD} = 25 V, R _L = 23 Ω I _D ≅ 1 A, V _{GEN} = 10 V R _G = 25 Ω	6		10		15	ns
Turn-Off Time	t _{OFF}		8		10		15	

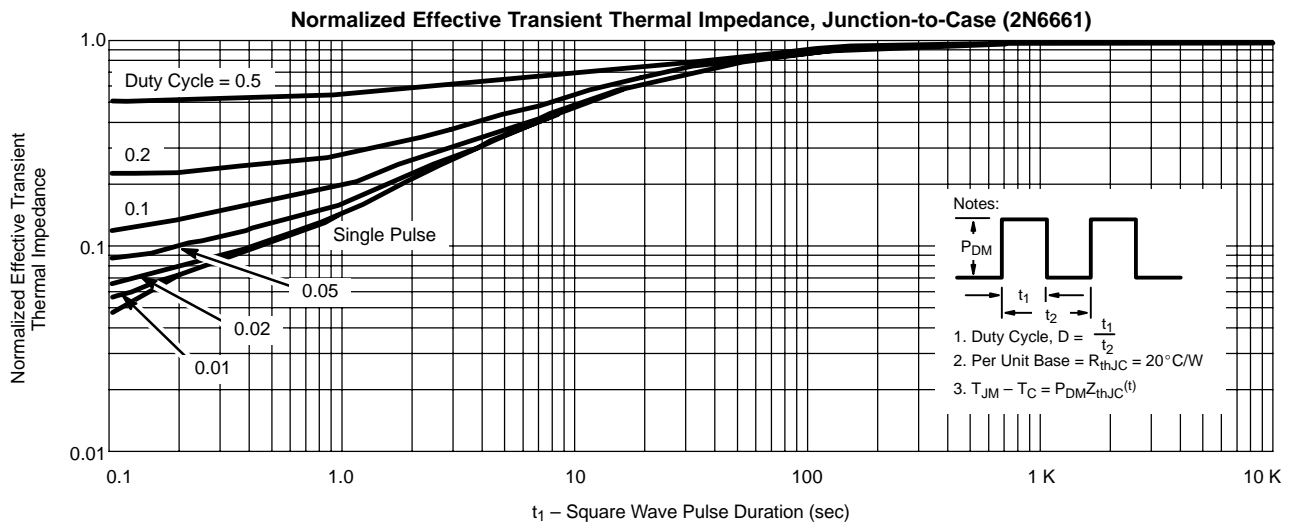
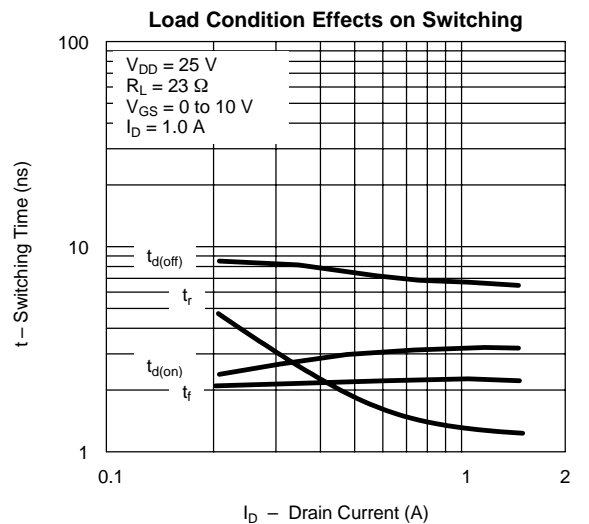
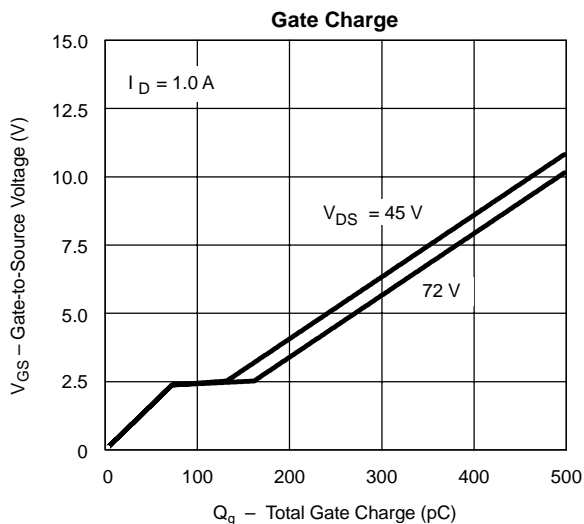
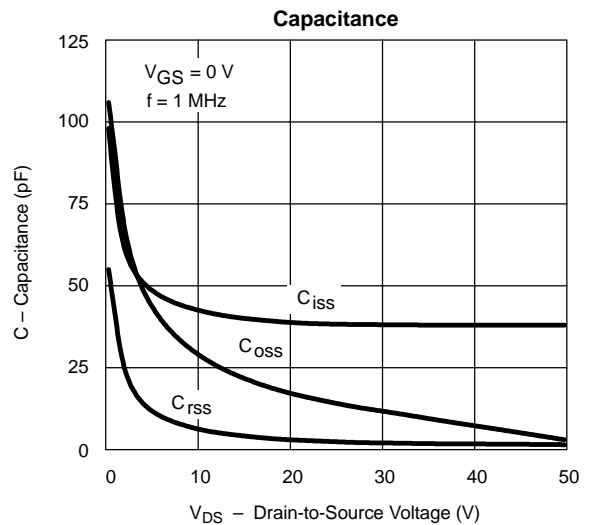
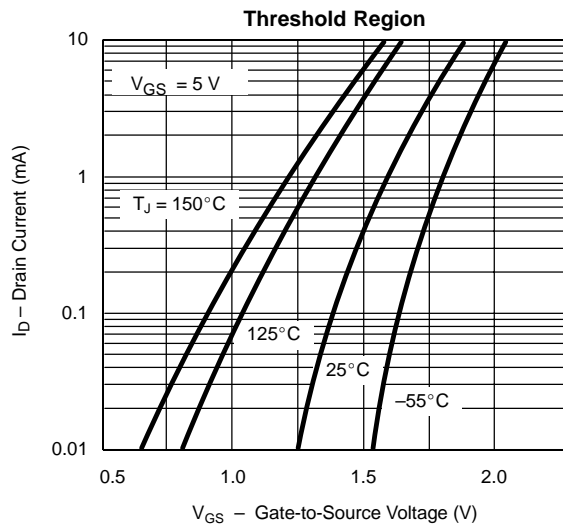
Notes

- For DESIGN AID ONLY, not subject to production testing.
- Pulse test: PW ≤ 300 μs duty cycle ≤ 2%.
- Switching time is essentially independent of operating temperature.
- This parameter not registered with JEDEC.

VNDQ09

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)
Ohmic Region Characteristics

Output Characteristics for Low Gate Drive

Transfer Characteristics

On-Resistance vs. Gate-to-Source Voltage

On-Resistance vs. Drain Current

Normalized On-Resistance vs. Junction Temperature


TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)





Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.