


PNP SILICON PLANAR SWITCHING TRANSISTORS

2N2906 2N2907

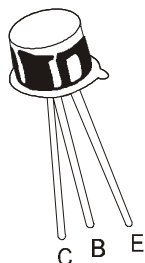

**TO-18
Metal Can Package**

Switching and Linear Application

ABSOLUTE MAXIMUM RATINGS

| DESCRIPTION | SYMBOL | VALUE | UNIT |
|---|----------------|--------------|-------------|
| Collector Emitter Voltage | V_{CEO} | 40 | V |
| Collector Base Voltage | V_{CBO} | 60 | V |
| Emitter Base Voltage | V_{EBO} | 5 | V |
| Collector Current Continuous | I_C | 600 | mA |
| Power Dissipation @ $T_a=25^\circ\text{C}$ Derate Above 25°C | P_D | 400 2.28 | mW mW/°C |
| Power Dissipation @ $T_c=25^\circ\text{C}$ Derate Above 25°C | P_D | 1.8 10.3 | W mW/°C |
| Operating and Storage Junction Temperature Range | T_j, T_{stg} | - 65 to +200 | °C |

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless specified otherwise)

| DESCRIPTION | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|---------------------------|------------|--|-----|-----|-----|---------------|
| Collector Emitter Voltage | $*V_{CEO}$ | $I_C=10\text{mA}, I_B=0$ | 40 | | | V |
| Collector Base Voltage | V_{CBO} | $I_C=10\mu\text{A}, I_E=0$ | 60 | | | V |
| Emitter Base Voltage | V_{EBO} | $I_E=10\mu\text{A}, I_C=0$ | 5 | | | V |
| Collector Cut Off Current | I_{CEX} | $V_{CE}=30\text{V}, V_{BE}=0.5\text{V}$ | | | 50 | nA |
| Collector Cut Off Current | I_{CBO} | $V_{CB}=50\text{V}, I_E=0$ | | | 20 | nA |
| | | $V_{CB}=50\text{V}, I_E=0,$ $T_a=150^\circ\text{C}$ | | | 20 | μA |
| Base Current | I_B | $V_{CE}=30\text{V}, V_{BE}=0.5\text{V}$ | | | 50 | nA |


2N2906

2N2907

| DC Current Gain | h_{FE} | $I_C=0.1\text{mA}, V_{CE}=10\text{V}$ | >20 | >35 |
|-----------------|----------|--|----------|-----------|
| | | $I_C=1\text{mA}, V_{CE}=10\text{V}$ | >25 | >50 |
| | | $I_C=10\text{mA}, V_{CE}=10\text{V}$ | >35 | >75 |
| | | $*I_C=150\text{mA}, V_{CE}=10\text{V}$ | 40 - 120 | 100 - 300 |
| | | $*I_C=500\text{mA}, V_{CE}=10\text{V}$ | >20 | >30 |

***Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$**

2N2906_2907Rev010303E

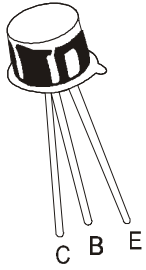

TO-18
Metal Can Package

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless specified otherwise)

SMALL SIGNAL CHARACTERISTICS

| DESCRIPTION | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|--------------------------------------|----------------|--|-----|-----|-----|------|
| Collector Emitter Saturation Voltage | $*V_{CE(sat)}$ | $I_C=150\text{mA}, I_B=15\text{mA}$ | | | 0.4 | V |
| | | $I_C=500\text{mA}, I_B=50\text{mA}$ | | | 1.6 | V |
| Base Emitter Saturation Voltage | $*V_{BE(sat)}$ | $I_C=150\text{mA}, I_B=15\text{mA}$ | | | 1.3 | V |
| | | $I_C=500\text{mA}, I_B=50\text{mA}$ | | | 2.6 | V |
| Transition Frequency | $**f_T$ | $I_C=50\text{mA}, V_{CE}=20\text{V},$ $f=100\text{MHz}$ | 200 | | | MHz |
| Output Capacitance | C_{obo} | $V_{CB}=10\text{V}, I_E=0,$ $f=100\text{KHz}$ | | | 8.0 | pF |
| | C_{ibo} | $V_{BE}=2\text{V}, I_C=0,$ $f=100\text{KHz}$ | | | 30 | pF |

SWITCHING TIME

| DESCRIPTION | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|---------------|-----------|---|-----|-----|-----|------|
| Delay Time | t_d | $I_C=150\text{mA}, I_{B1}=15\text{mA},$ $V_{CC}=30\text{V}$ | | | 10 | ns |
| Rise Time | t_r | | | | 40 | ns |
| Turn On Time | t_{on} | | | | 45 | ns |
| Storage Time | t_s | $I_C=150\text{mA}, I_{B1}=$ $I_{B2}=15\text{mA}, V_{CC}=6\text{V}$ | | | 80 | ns |
| Fall Time | t_f | | | | 30 | ns |
| Turn Off Time | t_{off} | | | | 100 | ns |



*Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$

** f_T is defined as the frequency at which $|h_{fe}|$ extrapolates to unity

2N2906_2907Rev010303E


**TO-18
Metal Can Package**

TO-18 Metal Can Package

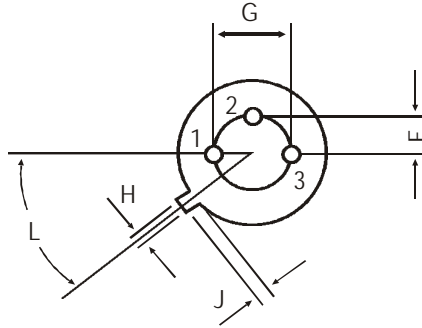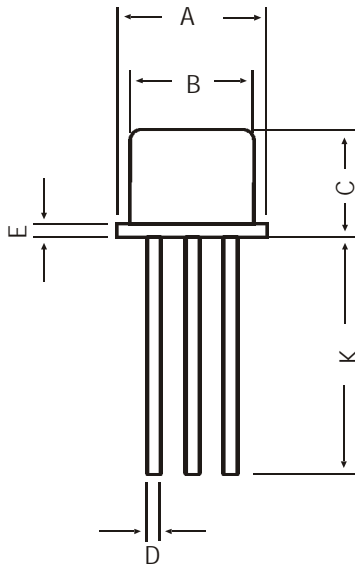

All dimensions in mm.

| DIM | MIN | MAX |
|-----|--------|------|
| A | 5.24 | 5.84 |
| B | 4.52 | 4.97 |
| C | 4.31 | 5.33 |
| D | 0.40 | 0.53 |
| E | — | 0.76 |
| F | — | 1.27 |
| G | — | 2.97 |
| H | 0.91 | 1.17 |
| J | 0.71 | 1.21 |
| K | 12.70 | — |
| L | 45 DEG | |

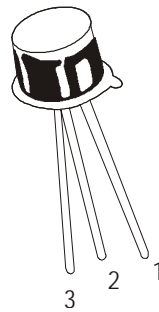

PIN CONFIGURATION

- 1. EMITTER
- 2. BASE
- 3. COLLECTOR

Packing Detail

| PACKAGE | STANDARD PACK | | INNER CARTON BOX | | OUTER CARTON BOX | | |
|---------|---------------|----------------|------------------|-----|-------------------|-----|--------|
| | Details | Net Weight/Qty | Size | Qty | Size | Qty | Gr Wt |
| TO-18 | 1K/polybag | 350 gm/1K pcs | 3" x 7.5" x 7.5" | 5K | 17" x 15" x 13.5" | 80K | 34 kgs |

2N2906_2907Rev010303E

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Discrete Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.
Telephone + 91-11-2579 6150, 5141 1112 Fax + 91-11-2579 5290, 5141 1119
email@cdil.com www.cdilsemi.com