




Features:

- Collector-Emitter Sustaining Voltage
 $V_{CEC(SUS)} = 30V$ (Minimum)
- Collector-Emitter Saturation Voltage
 $V_{CE(sat)} = 2.0V$ (Maximum) at $I_C = 5.0 A$
- Reverse-Base SOA - 300V to 400V at 7A

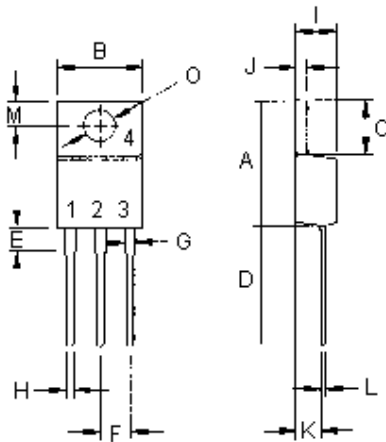


Pin 1. Base
2. Collector
3. Emitter
4. Collector (Case)

Dimensions	Minimum	Maximum
A	14.68	15.31
B	9.78	10.42
C	5.01	8.52
D	13.06	14.62
E	3.57	4.07
F	2.42	3.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.97
L	0.33	0.55
M	2.48	2.98
O	3.7	3.90

Dimensions : Millimetres

NPN
TIP150

7 Ampere
Darlington
Power Transistors
300-400 Volts
80 Watts




TO-220

Maximum Ratings

Characteristic	Symbol	TIP150	Unit
Collector-Emitter Voltage	V_{CEO}	300	V
Collector-Base Voltage	V_{CBO}		
Emitter-Base Voltage	V_{EBO}		
Collector Current-Continuous -Peak	I_C I_{CM}	7.0 10	A
Base Current	I_B	1.5	
Total Power Dissipation at $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	80 0.64	W $\text{W}/^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +150	$^\circ\text{C}$

Thermal Characteristics

Characteristic	Symbol	Maximum	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.56	$^\circ\text{C}/\text{W}$

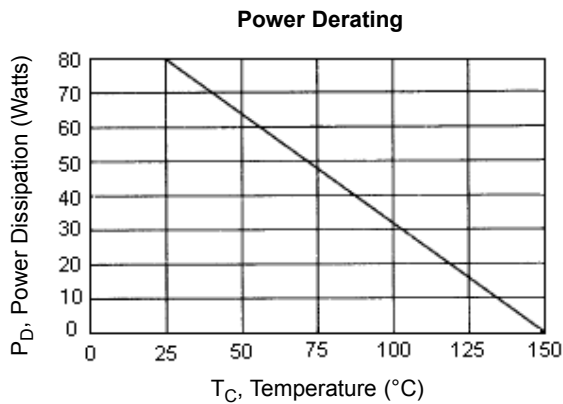


Electrical characteristics ($T_c = 25^\circ\text{C}$ unless otherwise noted)


Characteristic	Symbol	Minimum	Maximum	Unit	
OFF Characteristics					
Collector - Emitter Breakdown Voltage (1) ($I_c = 10\text{mA}$, $I_B = 0$)	TIP150	300	-	V	
Collector - Base Breakdown Voltage (1) ($I_c = 1.0\text{mA}$, $I_B = 0$)	TIP150		-		
Collector Cutoff Current ($V_{CE} = 300\text{V}$, $I_B = 0$)	TIP150	I_{CEO}	-	250	μA
Emitter Cutoff Current ($V_{EB} = 8.0\text{V}$, $I_c = 0$)		I_{EBO}	-	15	mA
ON Characteristics (1)					
DC Current Gain ($I_c = 2.5\text{A}$, $V_{CE} = 5.0\text{V}$) ($I_c = 5.0\text{A}$, $V_{CE} = 5.0\text{V}$) ($I_c = 7.0\text{A}$, $V_{CE} = 5.0\text{V}$)		h_{FE}	150 50 15	-	-
Collector-Emitter Saturation Voltage ($I_c = 1.0\text{A}$, $I_B = 10\text{mA}$) ($I_c = 2.0\text{A}$, $I_B = 100\text{mA}$) ($I_c = 5.0\text{A}$, $I_B = 250\text{mA}$)		$V_{CE(sat)}$	-	1.5 1.5 2.0	V
Base-Emitter Saturation Voltage ($I_c = 2.0\text{A}$, $I_B = 100\text{mA}$) ($I_c = 5.0\text{A}$, $I_B = 250\text{mA}$)		$V_{BE(sat)}$	-	2.2 2.3	
Diode Forward Voltage ($I_F = 7.0\text{A}$)		V_F	-	3.5	
Dynamic Characteristics					
Small-Signal Current Gain ($I_c = 0.5\text{A}$, $V_{CE} = 5.0\text{V}$, $f = 1.0\text{KHz}$)		h_{fe}	200	-	-
Output Capacitance ($V_{CB} = 10\text{V}$, $I_E = 0$, $f = 1.0\text{MHz}$)		C_{ob}	-	150	PF
Switching Characteristics					
Delay Time	$V_{CC} = 250\text{V}$, $I_c = 5.0\text{A}$ $I_{B1} = -I_{B2} = 250\text{mA}$, $t_p = 20\mu\text{s}$, Duty Cycle $\leq 2.0\%$	t_d	30 (typical)	-	ns
Rise Time		t_r	180 (typical)	-	
Storage Time		t_s	3.5 (typical)	-	us
Fall Time		t_f	1.6 (typical)	-	

(1) Pulse Test : Pluse Width = $30\mu\text{s}$, Duty Cycle $\leq 2.0\%$.


DC Current Gain

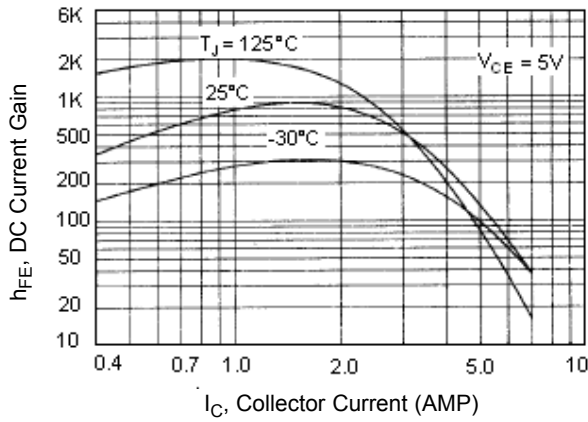


Base-Emitter Voltage

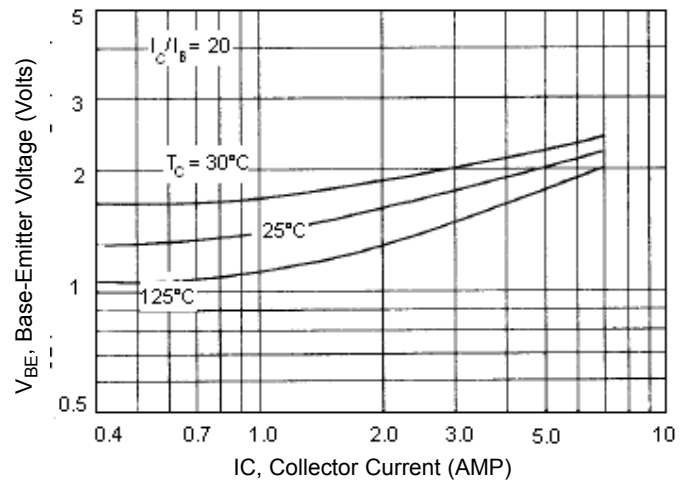


Collector-Emitter Saturation Voltage

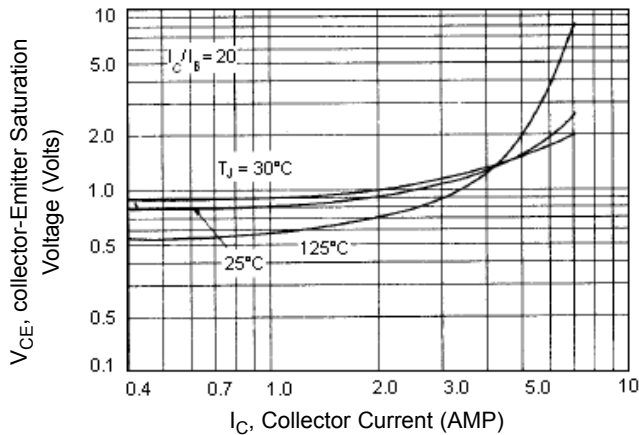

Reverse Biase Safe Operating Area

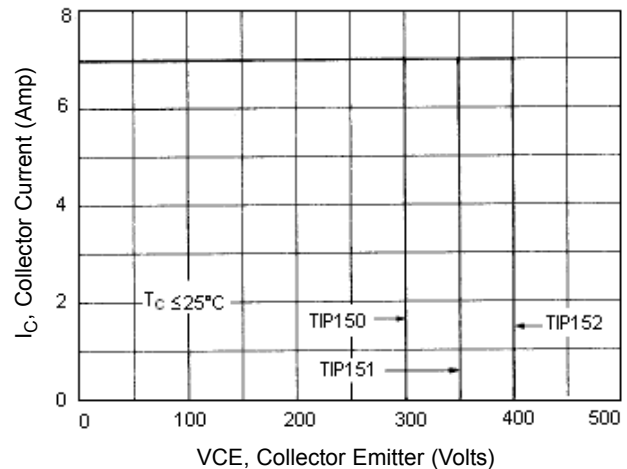

Active Region Sage Operating Area

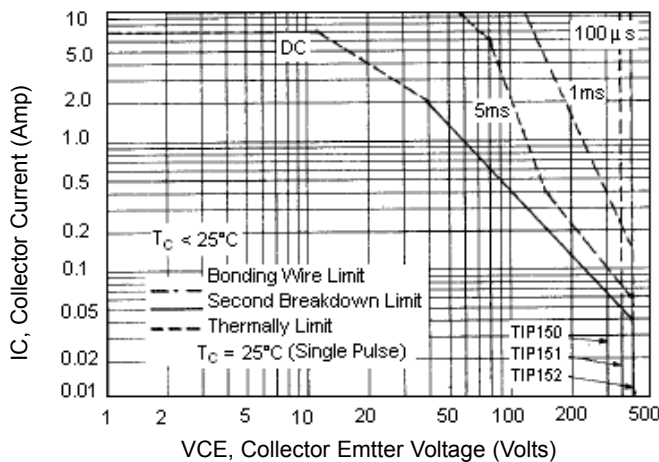

There are two limitation on the power handling ability of a transistor average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate. The data of FIG-6 curve is base on $T_J(PK)=150^\circ\text{C}$; T_C is variable depending on power level, second breakdown pulse limits are valid for duty cycles to 10% provided $T_J(PK) < 150^\circ\text{C}$, At high case temperatures thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

Part Number Table

Description	Part Number
Transistor, Darlington TO-220	100310

Notes:

International Sales Offices:

 AUSTRALIA - Farnell Tel No: ++61 1300 361 005 Fax No: ++61 1300 361 225	 FINLAND - Farnell Tel No: ++358 9 560 7780 Fax No: ++358 9 345 5411	 ITALY - Farnell Tel No: ++39 02 93 995 200 Fax No: ++39 02 93 995 300	 SPAIN - Farnell Tel No: 901 20 20 80 Fax No: 901 20 20 90
 AUSTRIA - Farnell Tel No: ++43 662 2180 680 Fax No: ++43 662 2180 670	 FRANCE - Farnell Tel No: ++33 474 68 99 99 Fax No: ++33 474 68 99 90	 MALAYSIA - Farnell-Newark Tel No: ++60 3 7873 8000 Fax No: ++60 3 7873 7000	 SWEDEN - Farnell Tel No: ++46 8 730 50 00 Fax No: ++46 8 83 52 62
 BELGIUM - Farnell Tel No: ++32 3 475 2810 Fax No: ++32 3 227 3648	 GERMANY - Farnell Tel No: ++49 89 61 39 39 39 Fax No: ++49 89 613 59 01	 NETHERLANDS - Farnell Tel No: ++31 30 241 7373 Fax No: ++31 30 241 7333	 SWITZERLAND - Farnell Tel No: ++44 204 64 64 Fax No: ++44 204 64 54
 BRAZIL - Farnell-Newark Tel No: ++55 11 4066 9400 Fax No: ++55 11 4066 9410	 HONG KONG - Farnell-Newark Tel No: ++852 2268 9888 Fax No: ++852 2268 9899	 NEW ZEALAND - Farnell Tel No: 0800 90 80 80 Fax No: 0800 90 80 81	 UK - Farnell Tel No: ++44 8701 200 200 Fax No: ++44 8701 200 201
 CHINA - Farnell-Newark Tel No: ++86 10 6238 5152 Fax No: ++86 10 6238 5022	 HUNGARY - Farnell Tel No: ++44 870 1200 208 Fax No: ++44 870 1200 209	 NORWAY - Farnell Tel No: 800 146 70 Fax No: 800 146 76	 UK - CPC ++44 8701 202 530 ++44 8701 202 531
 CZECH REPUBLIC - Farnell Tel No: ++44 870 1200 208 Fax No: ++44 870 1200 209	 INDIA - Farnell Tel No: ++44 870 1200 208 Fax No: ++44 870 1200 209	 PORTUGAL - Farnell Tel No: ++34 93 475 8804 Fax No: ++34 93 474 5288	 USA - Newark Tel No: 800 463 9275
 DENMARK - Farnell Tel No: ++45 44 53 66 44 Fax No: ++45 44 53 66 06	 IRELAND - Farnell Tel No: ++353 1 830 9277 Fax No: ++353 1 830 9016	 RUSSIA - Farnell Tel No: ++44 870 1200 208 Fax No: ++44 870 1200 209	 EXPORT - Farnell Tel No: ++44 8701 200 208 Fax No: ++44 8701 200 209 For enquiries from all other markets
 ESTONIA - Farnell Tel No: ++358 9 560 7780 Fax No: ++358 9 345 5411	 ISRAEL - Farnell Tel No: ++180 937 0015 Fax No: ++180 937 0014	 SINGAPORE - Farnell-Newark Tel No: ++65 6788 0200 Fax No: ++65 6788 0300	http://www.farnell.com http://www.newark.com http://www.cpc.co.uk

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2008.