

VEP24 Series



- CEC2008 & EISA2007 Compliant
- Medical & ITE Approvals
- Interchangeable Input Connectors
- Class II Construction
- EN55022 Class B Emissions
- Low Cost
- Output Voltages from 5.0 V to 24.0 V Available

Specification

Input

Input Voltage	• 90-264 VAC
Input Frequency	• 47-63 Hz
Input Current	• 0.6 A max at 90 VAC
Inrush Current	• 50 A max at 240 VAC
Power Factor	• Conforms to EN61000-3-2, class A
No Load Input Power	• <0.3 W

Output

Output Voltage	• See table
Initial Set Accuracy	• $\pm 5\%$ at 50% load
Minimum Load	• No minimum load required
Start Up Delay	• 2s max
Start Up Rise Time	• 50 ms typical
Hold Up Time	• 5 ms typical at full load and 115 VAC
Line Regulation	• $\pm 0.5\%$ max
Load Regulation	• $\pm 5\%$ max
Transient Response	• 4% max. deviation, recovery to <1% within 500 μ s for a 50% step load change at 0.2 A/ μ s
Ripple & Noise	• See table
Overvoltage Protection	• See table
Overload Protection	• 120-280%, auto recovery
Short Circuit Protection	• Trip and restart (Hiccup mode)
Temperature Coefficient	• 0.2 %/ $^{\circ}$ C

General

Efficiency	• See table
Isolation	• 4000 VAC Input to Output
Switching Frequency	• 65 kHz typical
MTBF	• >250 kHrs per MIL-HDBK-217F @ 25 $^{\circ}$ C

Environmental

Operating Temperature	• 0 $^{\circ}$ C to +40 $^{\circ}$ C
Cooling	• Natural convection
Operating Humidity	• 5-95% RH, non-condensing
Storage Temperature	• -20 $^{\circ}$ C to +60 $^{\circ}$ C
Shock	• Able to survive 1m drop onto concrete on each of 6 axes
Vibration	• 10-300 Hz, 2 g 15 mins/sweep. 30 mins for each of 3 axes

EMC & Safety

Emissions	• EN55022, level B conducted & radiated
Harmonic Currents	• EN61000-3-2, class A
Voltage Flicker	• EN61000-3-3
ESD Immunity	• EN61000-4-2, ± 4 kV contact, ± 8 kV air, Perf Criteria A
Radiated Immunity	• EN61000-4-3, 3 V/m, Perf Criteria A
EFT/Burst	• EN61000-4-4, level 2, Perf Criteria A
Surge	• EN61000-4-5, level 3, Perf Criteria A
Conducted Immunity	• EN61000-4-6, 3 V, Perf Criteria A
Magnetic Field	• EN61000-4-8, 1 A/m, Perf Criteria A
Dips & Interruptions	• EN61000-4-11, 30% 10 ms, 60% 100 ms, 100% 5000 ms, Perf Criteria A, B, B
Safety Approvals	• EN60950, UL60950-1, IEC60950-1, CSA 60950-1-03, EN60601-1, UL60601-1, IEC60601-1, CSA C22.2 N $^{\circ}$ 601.1, China Compulsory Certification (CCC) Qualified



Models and Ratings

Output Power	Output Voltage ⁽³⁾	Output Current	Ripple & Noise ⁽¹⁾	Overvoltage Trip ⁽⁵⁾	Efficiency ⁽⁴⁾	Model Number ⁽²⁾
12.5 W	5 V	2.5 A	100 mV	10 V	73%	VEP24US05
19.8 W	9 V	2.2 A	100 mV	18 V	77%	VEP24US09
24 W	12 V	2.0 A	100 mV	20 V	78%	VEP24US12
24 W	15 V	1.6 A	100 mV	25 V	78%	VEP24US15
24 W	24 V	1 A	100 mV	35 V	78%	VEP24US24

Notes

1. Measured at end of DC output lead using 20 MHz band width and 0.1 μF ceramic capacitor in parallel with 10 μF electrolytic capacitor placed at connector terminals.
2. A suffix denoting the type of mains plug required must be added to the part number. See below.
3. Other voltages between 3.0 V and 24.0 V are available on request, consult sales for details.
4. Efficiency given is the average of efficiencies measured with output loads of 25%, 50%, 75% and 100%.
5. Typical trip point.

Mechanical Details

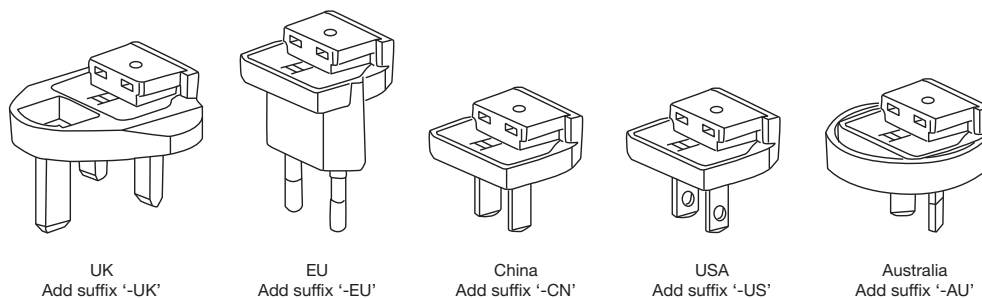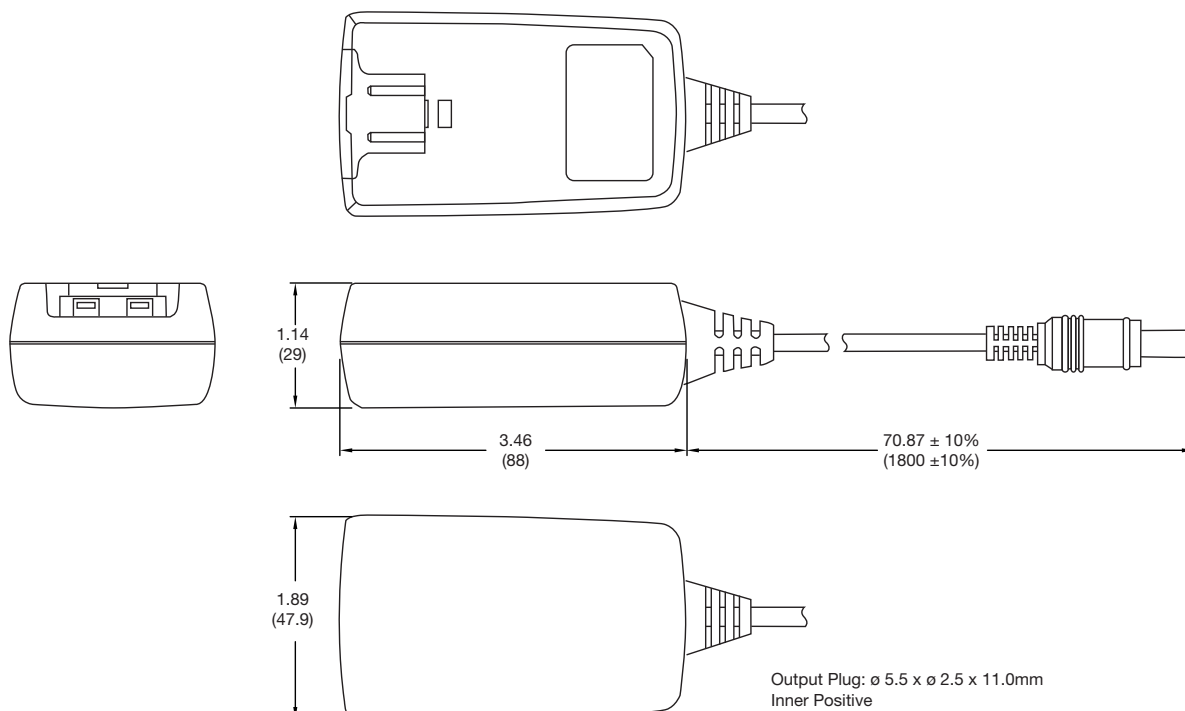

Notes

1. All measurements are in inches (mm). Tolerance is ±0.04 (±1) maximum, except output cable length
2. Weight 160g Approx
3. Case material is PC Class 94 V-0
4. Output Lead: UL2468 18-24 AWG
5. Mains plugs can be ordered separately. Part numbers are: VEP PLUG UK, VEP PLUG EU, VEP PLUG CN, VEP PLUG US or VEP PLUG AU

