


RoHS Compliant



PX-310

PCIe 2xRS422/485 1MBaud Opto Isolated

"SERIAL CARDS ENGINEERED TO EXCEED EXPECTATIONS"



Description

PCI Express Card providing two opto isolated RS422/485 serial ports. Up to 921,600 data transfer rates and the 128 byte deep transmit and 128 byte receive FIFOs, coupled with 1Mbit/s line drivers deliver uncompromising performance on your PC.


PCI Express is the latest standard in PC connectivity.

With Brainboxes' industry renowned Lifetime Warranty and Lifetime Support!

Features

- 2 port RS422/485
- PCI Express x1, x4, x8 & x16 lane slots socket size
- 128 Byte Tx and 128 Byte Rx FIFOs
- Up to 921,600 Baud
- DB9 connector (9 Pin Male)
- Drivers for all popular operating systems
- Sample Programs, Test & Terminal software
- Lifetime Support
- Lifetime Warranty (registration required)

Options



PX-310:
PCIe 2xRS422/485
1MBaud Opto Isolated


Software

Microsoft signed drivers (easy installation & robust operation) for:

- Windows Server 2008 32 bit & 64 bit Editions
- Windows Vista 32 bit and 64 bit editions
- Windows Server 2003 32 bit & 64 bit Editions
- Windows XP 32 bit & 64 bit editions




As well as: full product documentation, a thorough troubleshooting guide and terminal software. Detailed sample source code for many popular programming languages. Further OS support on next page.

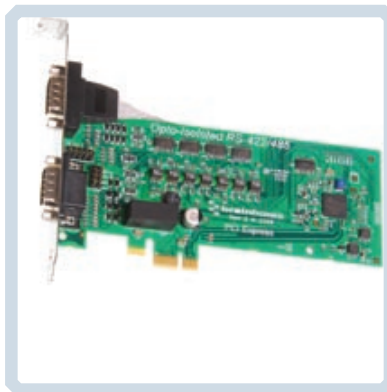

ORDER

Description	Code
PCIe 2xRS422/485 1MBaud Opto Isolated	PX-310



PCIe 2xRS422/485 1MBaud Opto Isolated

PX-310: Full Specification

<p>Port</p>	<p>Ports</p> <p>Connector</p> <p>FIFO size</p> <p>Operating Distance</p> <p>Cable</p>	<p>2 x RS422/485</p> <p>DB9 connector (9 Pin Male)</p> <p>128 RX FIFO + 128 TX FIFO</p> <p>RS422/485 Standard (4000 ft : 1200 metres)</p> <p>No Cable; Integrated Connector</p>
<p>Port Settings</p> <p>921,600 baud</p>	<p>Baud Rate</p> <p>Data Bits</p> <p>Parity</p> <p>Stop Bits</p> <p>Flow Control</p> <p>Tx/Rx Modes</p>	<p>921,600</p> <p>5,6,7 or 8</p> <p>Odd, Even, None, Mark or Space</p> <p>1, 1.5 or 2</p> <p>RTS/CTS DSR/DTR XON/XOFF</p> <p>Full Duplex, Half Duplex Autogating</p>
<p>Interface</p>	<p>OS Compatibility</p> <p>BUS</p>	<p>Windows Server 2008 32 bit & 64 bit Editions Windows Vista 32 bit & 64 bit Editions Windows Server 2003 32 bit & 64 bit Editions Windows XP 32 bit & 64 bit Editions Microsoft Windows 2000</p> <p>PCI Express x1, x4, x8 & x16 lane slots :</p>
<p>Approvals</p>	<p>Other Approvals</p> <p>Microsoft Approvals</p>	<p>WEEE RoHS EMC: CE Microsoft Certified Gold Partner</p> <p>Microsoft Certified Gold Partner Windows Server 2008 32 bit & 64 bit editions Windows Vista 32 bit & 64 bit editions Windows Server 2003 32 bit & 64 bit editions Windows XP 32 bit & 64 bit editions</p>
<p>General</p>	<p>PCB Layers</p> <p>Power Consumption</p> <p>Weight</p> <p>Size</p>	<p>4</p> <p>320mA @ 3.3V , 70mA @ 12V</p> <p>0.075 Kg</p> <p>160x120x20 mm</p>
<p>Box Content</p>	<p>Packaging</p> <p>Card</p>	<p>Installation CD including manual, Microsoft signed drivers & utilities</p> <p>PCIe 2xRS422/485 1MBaud Opto Isolated / No Cable; Integrated Connector</p>
<p>Product Support</p>	<p>Warranty</p> <p>Support</p>	<p>Lifetime (online registration required)</p> <p>Lifetime Web, Email and Phone Support from fully qualified, friendly staff who work in and alongside the Product Development Team</p>
<p>Additional</p>	<p>OEM option</p> <p>Made In</p> <p>Customisable</p>	<p>Available for bulk buy OEM</p> <p>Manufactured in the UK by Brainboxes Winner 2005 European Electronics Industry Awards "Manufacturer of the Year"</p> <p>Brainboxes operate a "Perfect Fit Custom Design" policy for volume users. More Info: sales@brainboxes.com</p>