



1-8-2

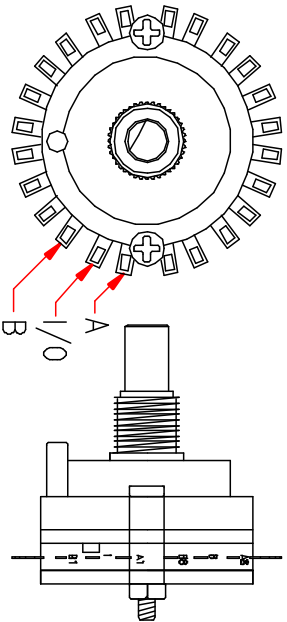

|            |        |            |
|------------|--------|------------|
| RJ45 F I/O | SWITCH | RJ45 F A&B |
| 1          | 1      | 1          |
| 2          | 2      | 2          |
| 3          | 3      | 3          |
| 4          | 4      | 4          |
| 5          | 5      | 5          |
| 6          | 6      | 6          |
| 7          | 7      | 7          |
| 8          | 8      | 8          |

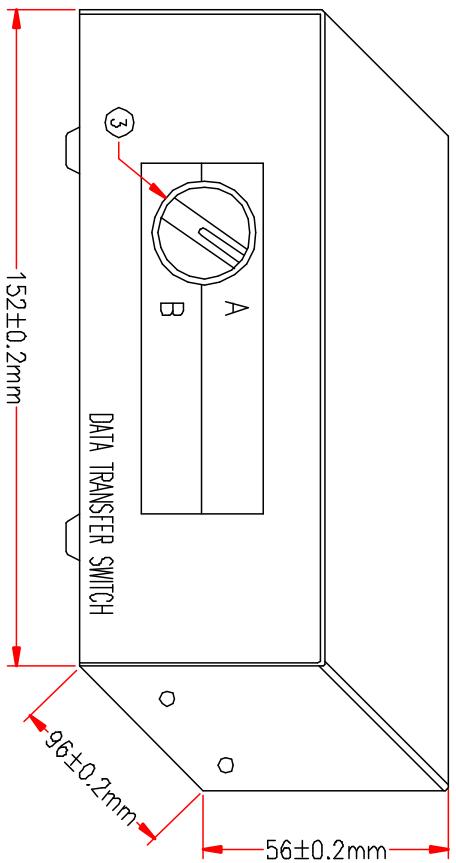

|     |   |      |          |
|-----|---|------|----------|
| 6   | PLASTO-VISCO-ELASTIC BODY                           | 4    | M562     |
| 5   | SCREW 3*6PW/Bmm                                     | 4    | M805     |
| 4   | METAL CASE, THICKNESS 0.8mm                         | 1set | M415     |
| 3   | UL1061 26AWG INSULATOR, LENGTH 150mm                | 24   | M541     |
|     | MAIN HEART 1-8-2                                    | 1    | M94      |
|     | SCREW 4*12.5mm WITH PAD                             | 1set | M94      |
|     | KNDB FOR A, B, SWITCH                               | 1    | M94      |
|     | STATOR  | 1    | M348     |
| 2   | PCB: RJ-45  | 1    | M590     |
|     | HEX-NUT WITH SCREW CAP 3*6mm                        | 8set | M95      |
| 1   | DB25 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR | 4    | M83      |
| No. | DESCRIPTION   | QTY  | Supplier |

ITEM NO.  
CST-RJ45/2