


- NOTES:**
1. ROHS COMPLIANT
 2. MATERIAL:
 PANEL CONNECTOR SOCKET - POLYPROPYLENE, UL RATING 94-HB
 HEADER CONNECTOR - POLYESTER, UL RATING 94-V0
 TERMINAL - PHOSPHOR BRONZE, TIN PLATE
 WIRE - 24 AWG 1007/1589
 3. MOUNTING: HOLE SIZE: 11/64" (4.37mm)
 4. PANEL THICKNESS: .030" (.762mm) MIN - .075" (1.905mm) MAX
 FOR PANEL THICKNESS .030" (.762mm) - .050" (1.270mm) USE 1 SPC 040 SPACER
 FOR PANEL THICKNESS .050" (1.397mm) - .075" (1.905mm) NO SPACER REQUIRED
 5. LED LEAD LENGTH: FOR SMC 130 - .380" (9.652mm); FOR SMC 170 - .320" (8.128mm)
 6. U.S. & FOREIGN PATENT ISSUED AND PENDING

REVISIONS				
ECN #	REV	DESCRIPTION	DATE	INITIALS
	001	REVISED PER ECR 111009AZ01	9/28/10	KH



CABLE ORDERING CODE EXAMPLE:

CNX B E 4 1 12



TERMINATION *	
X=	STRIPPED END
E=	SINGLE ROW LOCKING HEADER
G=	SINGLE ROW PLAIN HEADER

WIRE SIZE *	
4	24 AWG

WIRE COLOR *	
1	WHITE - BLACK
2	RED - BLACK

WIRE LENGTH *	
04	4 INCHES (101.6mm)
06	6 INCHES (152.4mm)
08	8 INCHES (203.2mm)
12	12 INCHES (304.8mm)
18	18 INCHES (457.2mm)
24	24 INCHES (609.6mm)

* CALL FACTORY FOR ADDITIONAL OPTIONS

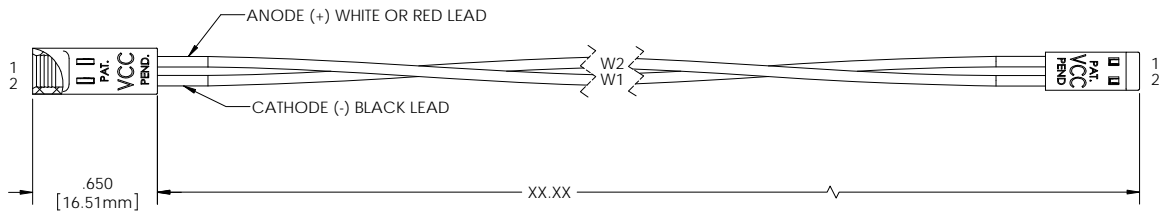

<small>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. DIMENSIONS IN PARENTHESES ARE MILLIMETERS. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENTS.</small> <small>PROPRIETARY AND CONFIDENTIAL</small> <small>THIS INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE. IT IS THE PROPERTY OF VCCO, INC. AND IS LOANED TO THE CUSTOMER. IT IS TO BE USED ONLY FOR THE SPECIFIC PURPOSES FOR WHICH IT IS LOANED. A WRITTEN NOTICE OF THE LIMITED PROVISIONS OF USE MUST ACCOMPANY ALL RETURNED MATERIALS. VCCO, INC. IS PROHIBITED FROM REPRODUCING THIS INFORMATION.</small>	MATERIAL SEE NOTES	 <small>190 PLYMOUTH BLVD SUITE 101 SAN MARCOS, CA 92069 U.S.A. PHONE: (760) 560-1300, FAX: (760) 560-1301 EMAIL: vcco@vcco.com</small>	
	FINISH SEE NOTES	TITLE: CNX B CABLE ASSEMBLY	
APPROVAL	DATE	SIZE	DWG. NO.
DRAWN K.Howard	9/28/10	B	CNX B ASSY
CHECKED DPZ	11/29/10	SCALE: 1:1	REV 001
DO NOT SCALE DRAWING		SHEET 1 OF 1	