



LIGHT PIPE ASSEMBLY
ORDERING CODE (EXAMPLE): **FLX XX**

REVISIONS				
ECN #	REV	DESCRIPTION	DATE	INITIALS
	001	INITIAL RELEASE	7/8/10	SMU
	002	CHG DWG FORMAT	8/2/10	KH
	003	REVISED PER ECR 092810AAA01	10/4/10	KH


- NOTES
- ROHS COMPLIANT
 - MATERIALS:
FIBER OPTIC: 1.5MM DIA OPTICAL CORE , 2.2MM DIA POLYETHYLENE CABLE JACKET
LENS MOUNT: OPTICAL GRADE ACRYLIC
 - LED MOUNTS: NYLON 66, UL RATING 94-V2
LENS: POLYCARBONATE UL RATING 94-V2
LENS SPACER: POLYPROPYLENE
 - OPTICAL CORE ENDS POLISHED TO .10 MICRONS.
 - PANEL MOUNTING HOLE .250" ON 3/8" CENTERS
 - PANEL THICKNESS FOR CLF 280: 1/16" TO 1/8"; CLB 300, CLR 301 AND SOB 400: 1/32" TO 1/4"
 - FOR PANELS LESS THAN 3/16" USE SPC 125 SPACER
 - FOR ADDED SECURITY USE RNG 268.
 - FOR BEST RESULTS USE ONLY NARROW VIEWING ANGLE NON-DIFFUSED LEDS WITH OUTPUT POWER GREATER THAN 100mcd
 - U.S. AND FOREIGN PATENS ISSUED.

LENGTH	
LENGTH CODE	ACTUAL LENGTH
02	2.0"
04	4.0"
06	6.0"
08	8.0"
12	12.0"
CUSTOM LENGTHS AVAILABLE	

MOUNTING OPTIONS
(ORDER SEPARATELY)



LENS OPTIONS
(ORDER SEPARATELY)

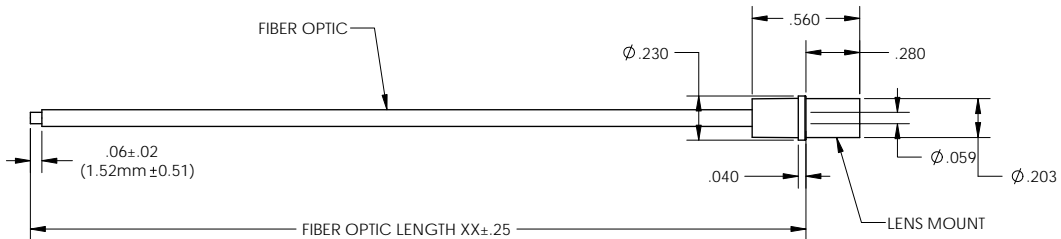

<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES</small> ANGLES: ° FT FINISH: XX, XXX, XXXX, XXXX UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE TO BE HIDDEN DIMENSIONS THIRD ANGLE PROJECTION <small>APPROVED BY AIA CONSULTANTS</small> <small>FOR INFORMATION OF THE USER, THIS DRAWING IS THE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM VISUAL COMMUNICATIONS COMPANY, INC.</small>	MATERIAL	VISUAL COMMUNICATIONS COMPANY, INC. 190 Busstock Boulevard, Suite 101 San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vccite.com	
	SEE NOTES	TITLE: FLEXIBLE LITE PIPE	
APPROVAL	DATE	SIZE	DWG. NO.
DRAWN K. Howard	8/2/10	B	FLX XX
CHECKED AZ	8/2/10	SCALE: 1:1	REV 003
DO NOT SCALE DRAWING		SHEET 1 OF 1	