



These resistor capacitor suppressors are designed to reduce contact arcing where inductive loads are involved, thereby increasing the life of their contacts.


They may also be used for reducing dv/dt across thyristors or other solid state devices,

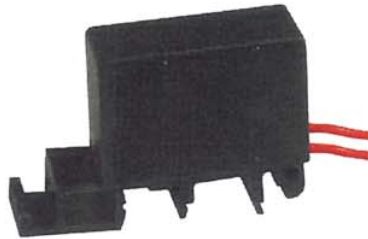

CHARACTERISTICS	
Capacitance :	0.01 - 0.1 $\mu$ F
Capacitance Tolerance :	$\pm$ 10 and 20%
Resistors :	47-470ohm $\pm$ 5% 4 watt
Operating Voltage :	500 V RMS (MAX)
Supply Frequency :	50 / 60 Hz
Operating Temperature :	- 40°C to + 70°C
Insulation Resistance :	100M $\Omega$ 500V

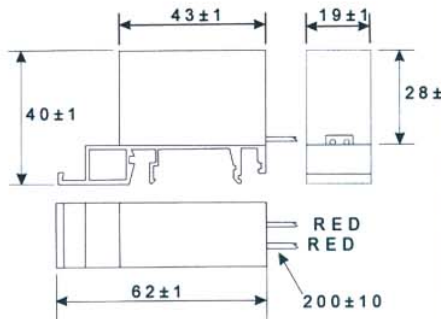

### Circuit Diagram

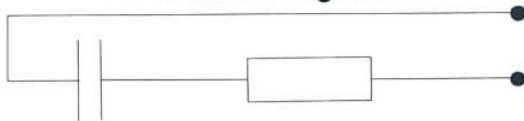

DIN Rail Mounting:  
Top Hat  
(EN50022, DIN46277-3 BS5584)

G. Profile  
(EN50035, DIN46277-1 BS5825)

Other capacitor/Resistor values, case shapes and terminations are available.

Sales Office Tel : (01495) 307070

Fax : (01495) 306965

**LCR**  
Capacitors

