



Applying the
technology of light



T: +44 (0)1209 215424
F: +44 (0)1209 215197
omc-sales@omc-uk.com
www.omc-uk.com

OMC (UK) Ltd.
Candela House,
Cardrew Industrial Estate,
Redruth, Cornwall
TR15 1SS. UK

Product

H3R880IR

Description

**FDH3 HOUSING WITH FDR880IR
PIN PHOTODIODE**

FDR880IR Silicon PIN Photodiode


- + Silicon Planar PIN Photodiode
- + High Speed
- + Cost Effective
- + Large Active Surface Area (1mm²)

Description

The FDR880IR is a planar PIN photodiode in a plastic package with a flat lens. This flat window has no effect on the beam path of optical lens systems. Because of its high cutoff frequency, this diode is particularly well suited for use as a high-modulation bandwidth optical sensor.

FMSA Rear Fitting Panel Mount

H3R880IR



Maximum Recommended Ratings

(@TA=25°C Unless Otherwise noted)

Reverse Voltage	30V
Storage Temperature Range	-55°C to +100 °C
Operating Temperature Range	-55°C to +100 °C
Lead Solder Temperature	300°C (2mm from case for 3secs)
Power Dissipation	100mW


Optoelectronic Characteristics

Parameter	Min	Typ	Max	Units	Test Conditions
Forward Voltage	—	1.3	—	V	I _F =80mA
Maximum Photosensitivity Wavelength	—	850	—	nm	—
Photosensitivity Spectral Range	—	400 to 1100	—	nm	S=10% of S _{MAX}
Photocurrent Rise Time	—	5	—	ns	R _L =50 Ω, V _F =20V, I _F =650mA, I _R =800A

A red sleeve on the anode denotes that the device is a transmitter. Receiver devices have a black lead on the anode.

FDH3 - SMA Rear Fitting Panel Mount

Package Dimensions

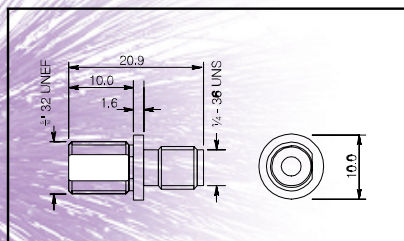

Panel Cutout

