


● PCB MOUNTING LEDs - Ø 2mm




- Side stackable on 2.54mm centres
- Industry standard device
- Sub-miniature size saves space
- Reverse polarity options available

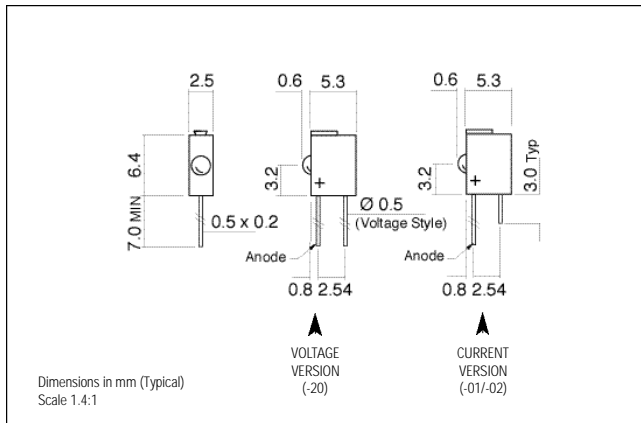

101 SERIES

MLQ = 250




Ordering Information & Typical Technical Characteristics (Ta = 25°C)

Mean Time Between Failure = 100,000 Hours. Low Current Models 250,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC Vopr	CURRENT DC Iopr	LUMINOUS INTENSITY Iv@10mA	WAVE LENGTH p	VIEWING ANGLE	OPERATING TEMP Topr	STORAGE TEMP Tstg
<b>STANDARD INTENSITY</b>									
101-205-01	Red	Coloured Diffused	1.8	2	10	635	Wide	-40 ~ +85	-40 ~ +85
101-211-01	Yellow		2.0	2	9	583			
101-214-01	Green		2.1	2	7	565			
101-205-02	Red		1.8	10	10	635			
101-211-02	Yellow		2.0	10	9	583			
101-214-02	Green		2.1	10	7	565			
101-205-20	Red		5	10	10	635			
101-211-20	Yellow		5	10	9	583			
101-214-20	Green		5	10	7	565			
<b>UNITS</b>			<b>Vdc</b>	<b>mA</b>	<b>mcd</b>	<b>nm</b>		<b>°C</b>	<b>°C</b>

Making Light Work For You!  
Making Light Work For You!  
Making Light Work For You!  
Making Light Work For You!  
Making Light Work For You!

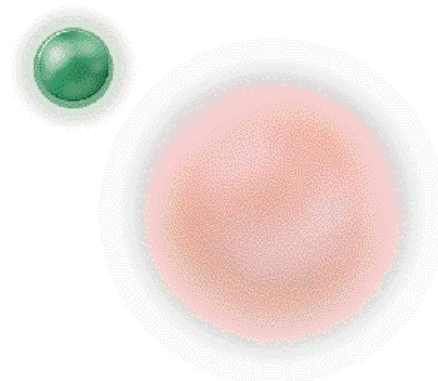

● SAMPLES AVAILABLE