


● PCB MOUNTING LEDs - Ø 5mm




- Bi-colour and resistor models enhance potential for saving assembly time and board space
- Reverse polarity options available

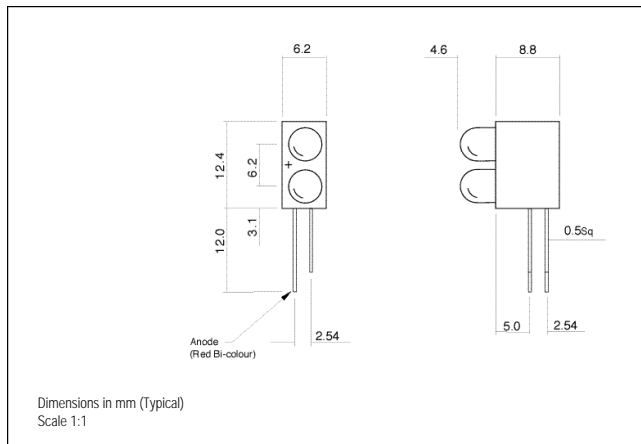

110 SERIES

MLQ = 250



Ordering Information & Typical Technical Characteristics (Ta = 25°C)

Mean Time Between Failure = 100,000 Hours. Low Current Models 250,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC Vopr	CURRENT DC Iopr	LUMINOUS INTENSITY Iv@20mA	WAVE LENGTH p	VIEWING ANGLE	OPERATING TEMP Topr	STORAGE TEMP Tstg
STANDARD INTENSITY									
110-505-01	Red	Coloured Diffused	2.0	2	15	625	Wide	-40 ~ +85	-40 ~ +85
110-511-01	Yellow		2.1	2	20	590			
110-514-01	Green		2.2	2	20	565			
110-505-04	Red		2.0*	20	15	625			
110-511-04	Yellow		2.1*	20	20	590			
110-514-04	Green		2.2*	20	20	565			
110-530-04	Red/Green	White Diffused	2.0/2,2*	20	30/20	625/525			
110-581-20	Red	Coloured Diffused	5	10	40@10mA	625			
110-582-20	Yellow		5	10	25@10mA	590			
110-583-20	Green		5	10	25@10mA	565			
UNITS			Vdc	mA	mcd	nm		°C	°C

* = Voltage DC for 20mA product is Vf@20mA, not Vopr

Please contact our Sales office for multi-colour array part numbers.



Making Light Work For You! Making Light Work For You! Making Light Work For You! Making Light Work For You! Making Light Work For You! Making Light Work For You!

● LEAD CROPPING OPTION, SEE PAGE 23